



# SPECIFICATION SHEET

## 120-4100



### MAXIMUM SAFETY® REINFORCED GOATSKIN LEATHER PALM GLOVE

- Reinforced goatskin leather palm and back provides the softest, most abrasion-resistant leather
- Split goatskin leather fingertips for added protection
- Kevlar® lining offers comfort and enhanced cut protection
- Internal foam padded palm absorbs and dampens shock
- Thermo Plastic Rubber (TPR) molded knuckle guards for maximum protection
- Reflective knuckle tape makes this product easy to see
- Hook & loop closure for easy on/off and a secure fit
- Sandy PVC thumb crotch and thumb reinforcement
- Retail Ready

### APPLICATIONS

- Construction
- Auto repair
- Demolition
- Manufacturing
- Mining
- Fabrication
- Landscaping

### CARE INSTRUCTIONS

Machine wash in cold water. Do not bleach. Hang dry; tumble dry is not recommended. Do not iron.

### TECHNICAL DATA

MATERIAL	Leather / Spandex /Lycra /Kevlar®				
CONSTRUCTION	<b>Back:</b> Unlined spandex fabric (96% nylon, 4% spandex) <b>Palm:</b> Goatskin leather, 0.7 - 0.8 gauge <b>Fingers:</b> Heavy lycra fabric (94% nylon, 6% lycra) <b>Knuckles:</b> Vinyl TPR mold <b>Lining:</b> Kevlar® fabric				
COLOR	■ Brown / ■ Black				
CUFF STYLE	Hook and loop wrist closure				
SIZES	S - XXL				
PACKAGING	12 pairs per dozen, 6 dozen per case				
CASE	22.5" x 15.7" x 11.5" / 57.2cm x 40cm x 29.2cm				
CASE WEIGHT	S	M	L	XL	XXL
	27.1 lb 12.3 kg	29.3 lb 13.3 kg	32 lb 14.5 kg	33.5 lb 15.2 kg	35.1 lb 15.9 kg
COO	Pakistan				




### BARCODES

ITEM	PAIR	DOZEN	CASE
■ 120-4100/S	616314069277	01616314069276	02616314069275
■ 120-4100/M	616314069260	01616314069269	02616314069268
■ 120-4100/L	616314069253	01616314069252	02616314069251
■ 120-4100/XL	616314069284	01616314069283	02616314069282
■ 120-4100/XXL	616314069291	01616314069290	02616314069299

### DIMENSIONS (in/cm)

	S	M	L	XL	XXL
<b>A</b>	9 / 22.9	9.4 / 23.9	9.75 / 24.8	10.15 / 25.8	10.35 / 26.3
<b>B</b>	3.75 / 9.5	4 / 10.2	4.25 / 10.8	4.5 / 11.4	4.75 / 12.1

Tolerance (in): +/- 0.125

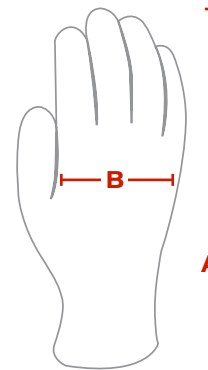

### PERFORMANCE PROPERTIES

<b>EN388: 3X32C</b>	ASTM F2992-15 ANSI Cut Level A3 (Adopted by ANSI/ISEA 02/16)					
ABRASION	0	1	2	3	4	-
CUT	X	1	2	3	4	5
TEAR	0	1	2	3	4	-
PUNCTURE	0	1	2	3	4	-
CUT (TDM-100)	A	B	C	D	E	F

**PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®**

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | [www.pipglobal.com](http://www.pipglobal.com)

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.