

Super Erecta® Shelf Solid Shelving (18-Gauge)

Shelves and Posts

- **Strength:** Two-fold thickness of 18-gauge steel forms $\frac{1}{8}$ " (3.2 mm) raised edges on all four sides of the shelving. This ship's edge gives all-around rigidity and high strength.
- **Weight Load Capacity:** 48" (1219 mm) and shorter holds 800 lbs. (363 kg) per shelf, 60" (1524 mm) holds 600 lbs. (272 kg) per shelf, 72" (1829 mm) holds 300 lbs. (136 kg) per shelf.
- **Sanitary:** Flat, solid style with the raised ship's edge on all four sides and at the corners contains spills, minimizes contamination and permits easier clean-up. Louvered/embossed shelf design allows air circulation under packages and containers.
- **Versatile Construction:** Super Erecta® Shelf solid shelving can change as quickly as your needs change. By using various accessories hundreds of shelving configurations become possible.
- **Shelf Accessibility:** Shelves can be loaded/unloaded from all sides. This open construction allows use of the maximum storage space of the cube.
- **Adjustability:** Shelves can be adjusted in 1" (25 mm) intervals along the entire length of the post.
- **Adjustable Feet:** Leveling bolts compensate for surface irregularities. Note: Stainless steel stationary posts include stainless leveling bolts.

Shelving Units

- **Metro Super Erecta** solid shelving ships knock down. Shelves mount to two-piece split sleeves along grooved 1" diameter posts. Shelves can be installed and adjusted along the entire length of the posts without tools. Solid and Wire shelves may be intermixed on the same shelving units.
- **Stationary units** can be leveled by adjusting the built-in levelling bolts on the stationary posts. **Stem casters** install into stem caster ready mobile posts.
- **Weight Load Capacities** for shelving units are based on evenly distributed load, the type of configuration and in accordance with the stability guidelines and configuration guidelines of the shelving.
 - Stationary shelving units: 2000 lbs. (907 kg)
 - Mobile units on stem casters: 3 times the caster load rating not to exceed 900 lbs. (408 kg).
 - Mobile units on dolly bases: up to 1000 lbs. (454 kg)



All Metro Catalog Sheets are available on our website: metro.com

{10.20} Super Erecta® Shelf Solid Shelving (18-Gauge)



• **Galvanized Shelves:** Formed galvanized 18-gauge sheet with continuous 1/8" (3.2 mm) raised perimeter edge attaches to four uncoated cast aluminum collars with zinc plated hardware. Hemmed two-fold sheet around the perimeter gives overall rigidity and high strength. Each shelf includes a bag of plastic spilt sleeves (high impact polystyrene). Available in flat solid and louvered/embossed styles.

• **Standard Type 304 Stainless Steel Shelves:** Formed Type 304 Stainless Steel 18-gauge sheet with continuous 1/8" (3.2 mm) raised perimeter edge attaches to four e-coated cast aluminum collars with zinc plated hardware. Hemmed two-fold sheet around the perimeter gives overall rigidity and high strength. Each shelf includes a bag of plastic spilt sleeves (high impact polystyrene). Available in flat solid and louvered/embossed styles.



| (in.) | Width/Length (mm) | Approx. Pkd. Wt. (lbs.) | Wt. (kg) | GALVANIZED | | STANDARD STAINLESS STEEL | |
|-------|----------------------|----------------------------|-------------|--------------------|---------------------------------|--------------------------|--------------------------------|
| | | | | Flat Galvanized | Louvered/Embossed Galvanized | Flat Stainless | Louvered/Embossed Stainless |
| 14x24 | 355x610 | 10 | 4.5 | 1424FG | 1424LG | 1424FS | 1424LS |
| 14x30 | 355x760 | 12 | 5.4 | 1430FG | 1430LG | 1430FS | 1430LS |
| 14x36 | 355x914 | 14 | 6.4 | 1436FG | 1436LG | 1436FS | 1436LS |
| 14x42 | 355x1066 | 15 | 6.8 | 1442FG | 1442LG | 1442FS | 1442LS |
| 14x48 | 355x1219 | 17 | 7.7 | 1448FG | 1448LG | 1448FS | 1448LS |
| 14x60 | 355x1524 | 22 | 9.9 | 1460FG | 1460LG | 1460FS | 1460LS |
| 18x24 | 457x610 | 11 | 5.0 | 1824FG | 1824LG | 1824FS | 1824LS |
| 18x30 | 457x760 | 14 | 6.4 | 1830FG | 1830LG | 1830FS | 1830LS |
| 18x36 | 457x914 | 16 | 7.3 | 1836FG | 1836LG | 1836FS | 1836LS |
| 18x42 | 457x1066 | 18 | 8.2 | 1842FG | 1842LG | 1842FS | 1842LS |
| 18x48 | 457x1219 | 20 | 9.1 | 1848FG | 1848LG | 1848FS | 1848LS |
| 18x54 | 457x1372 | 22 | 9.9 | 1854FG | — | 1854FS | — |
| 18x60 | 457x1524 | 24 | 10.9 | 1860FG | 1860LG | 1860FS | 1860LS |
| 18x72 | 457x1829 | 29 | 13.2 | 1872FG | — | 1872FS | — |
| 21x24 | 530x610 | 13 | 5.9 | 2124FG | 2124LG | 2124FS | 2124LS |
| 21x30 | 530x760 | 15 | 6.8 | 2130FG | 2130LG | 2130FS | 2130LS |
| 21x36 | 530x914 | 18 | 8.2 | 2136FG | 2136LG | 2136FS | 2136LS |
| 21x42 | 530x1066 | 21 | 9.5 | 2142FG | 2142LG | 2142FS | 2142LS |
| 21x48 | 530x1219 | 23 | 10.4 | 2148FG | 2148LG | 2148FS | 2148LS |
| 21x60 | 530x1524 | 26 | 11.8 | 2160FG | 2160LG | 2160FS | 2160LS |
| 24x24 | 610x610 | 15 | 6.8 | 2424FG | 2424LG | 2424FS | 2424LS |
| 24x30 | 610x760 | 17 | 7.7 | 2430FG | 2430LG | 2430FS | 2430LS |
| 24x36 | 610x914 | 19 | 8.6 | 2436FG | 2436LG | 2436FS | 2436LS |
| 24x42 | 610x1066 | 21 | 9.5 | 2442FG | 2442LG | 2442FS | 2442LS |
| 24x48 | 610x1219 | 24 | 10.9 | 2448FG | 2448LG | 2448FS | 2448LS |
| 24x54 | 610x1372 | 27 | 12.2 | 2454FG | — | 2454FS | — |
| 24x60 | 610x1524 | 29 | 14.0 | 2460FG | 2460LG | 2460FS | 2460LS |
| 24x72 | 610x1829 | 33 | 15.0 | 2472FG | — | 2472FS | — |

Autoclavable/Cart Washable Premium Stainless Steel:

Durable materials for environments subject to harsh cleaning protocols, autoclave sterilization or high temperature cart wash chambers.

• Premium Type 304 Stainless Steel:

Complete Type 304 Stainless Steel construction.


Formed Type 304 Stainless Steel 18-gauge sheet with continuous 1/8" (3.2 mm) raised perimeter edge attaches to four cast Type 304 Stainless Steel collars with Type 304 Stainless Steel hardware. Hemmed two-fold sheet around the perimeter gives overall rigidity and high strength. Each shelf includes a bag of plastic split sleeves (high impact polystyrene). Optional Aluminum Split Sleeves are available.



• Premium Type 316 Stainless Steel:

Complete Type 316 Stainless Steel construction.

Formed Type 316 Stainless Steel 18-gauge sheet with continuous 1/8" (3.2 mm) raised perimeter edge attaches to four cast Type 316 Stainless Steel collars with Type 316 Stainless Steel hardware. Hemmed two-fold sheet around the perimeter gives overall rigidity and high strength. Each shelf includes a bag of plastic split sleeves (high impact polystyrene). Optional Aluminum Split Sleeves are available.

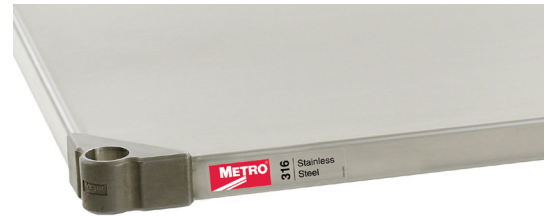

| (in.) | Width/Length (mm) | Approx. Pkd. Wt. (lbs.) | Wt. (kg) | PREMIUM TYPE 304 | PREMIUM TYPE 316 |
|-------|----------------------|----------------------------|-------------|-------------------------------|-------------------------------|
| | | | | Stainless Steel Flat Solid | Stainless Steel Flat Solid |
| 14x24 | 355x610 | 10 | 4.5 | 1424NFS | — |
| 14x30 | 355x760 | 12 | 5.4 | 1430NFS | — |
| 14x36 | 355x914 | 14 | 6.4 | 1436NFS | — |
| 14x42 | 355x1066 | 15 | 6.8 | 1442NFS | — |
| 14x48 | 355x1219 | 17 | 7.7 | 1448NFS | — |
| 14x60 | 355x1524 | 22 | 9.9 | 1460NFS | — |
| 18x24 | 457x610 | 11 | 5.0 | 1824NFS | 1824NFS-T316 |
| 18x30 | 457x760 | 14 | 6.4 | 1830NFS | 1830NFS-T316 |
| 18x36 | 457x914 | 16 | 7.3 | 1836NFS | 1836NFS-T316 |
| 18x42 | 457x1066 | 18 | 8.2 | 1842NFS | 1842NFS-T316 |
| 18x48 | 457x1219 | 20 | 9.1 | 1848NFS | 1848NFS-T316 |
| 18x54 | 457x1372 | 22 | 9.9 | — | — |
| 18x60 | 457x1524 | 24 | 10.9 | 1860NFS | 1860NFS-T316 |
| 18x72 | 457x1829 | 29 | 13.2 | * | — |
| 21x24 | 530x610 | 13 | 5.9 | 2124NFS | — |
| 21x30 | 530x760 | 15 | 6.8 | 2130NFS | — |
| 21x36 | 530x914 | 18 | 8.2 | 2136NFS | — |
| 21x42 | 530x1066 | 21 | 9.5 | 2142NFS | — |
| 21x48 | 530x1219 | 23 | 10.4 | 2148NFS | — |
| 21x60 | 530x1524 | 26 | 11.8 | 2160NFS | — |
| 24x24 | 610x610 | 15 | 6.8 | 2424NFS | 2424NFS-T316 |
| 24x30 | 610x760 | 17 | 7.7 | 2430NFS | 2430NFS-T316 |
| 24x36 | 610x914 | 19 | 8.6 | 2436NFS | 2436NFS-T316 |
| 24x42 | 610x1066 | 21 | 9.5 | 2442NFS | 2442NFS-T316 |
| 24x48 | 610x1219 | 24 | 10.9 | 2448NFS | 2448NFS-T316 |
| 24x54 | 610x1372 | 27 | 12.2 | — | — |
| 24x60 | 610x1524 | 29 | 14.0 | 2460NFS | 2460NFS-T316 |
| 24x72 | 610x1829 | 33 | 15.0 | * | — |

*Contact your Metro representative for availability.

Super Erecta® Shelf Solid Shelving (18-Gauge)

SiteSelect Posts

Type 304 Stainless Steel Posts

- **General construction:** All SiteSelect stainless steel posts consist of 1" (25 mm) outside diameter 18 gauge Type 304 Stainless Steel tubing grooved at 1" increments beginning approximate 2-1/8" (54 mm) from the base of the tube. Grooves are numbered every 2" (51 mm) and there is a double groove every 8" (203 mm) to help visually identify the desired shelf position during assembly.
- **Stationary Standard Post:** Includes a low density polyethylene post cap, cast zinc alloy post insert and Type 304 Stainless Steel leveling bolt (shoulder bolt with domed head) – all pre-installed.
- **Mobile Post for Stem Caster:** Includes a low density polyethylene post cap pre-installed. Bottom is open to accept a Metro stem caster [with 0.845" (21 mm) diameter stem and c-ring].

Chrome Plated Posts

- **General construction:** All SiteSelect chrome plated posts consist of 1" (25 mm) outside diameter 16 gauge cold rolled steel tubing with chrome plating grooved at 1" increments beginning approximate 2-1/8" (54 mm) from the base of the tube. Grooves are numbered every 2" (51 mm) and there is a double groove every 8" (203 mm) to help visually identify the desired shelf position during assembly.
- **Stationary Standard Post:** Includes a low density polyethylene post cap, cast zinc alloy post insert and zinc plated steel leveling bolt (shoulder bolt with domed head) – all pre-installed.
- **Mobile Post for Stem Caster:** Includes a low density polyethylene post cap pre-installed. Bottom is open to accept a Metro stem caster [with 0.845" (21 mm) diameter stem and c-ring].



SiteSelect Posts feature double grooves every 8" (203mm) to aid assembly.

| STATIONARY* | | | | MOBILE | | | | Approx. Pkd. Wt (lbs.) (kg) | |
|-------------------------|------|--------------------|-----------------------|-------------------------|------|--------------------|-----------------------|--------------------------------|------|
| Actual Height* (in.) | (mm) | Cat. No. Plated | Cat. No. Stainless | Actual Height* (in.) | (mm) | Cat. No. Plated | Cat. No. Stainless | | |
| 7.375 | 187 | 7P | — | 6.75 | 171 | 7UP | — | 0.5 | 0.3 |
| 14.375 | 365 | 13P | 13PS | 13.75 | 349 | 13UP | 13UPS | 1 | 0.5 |
| 28.375 | 720 | 27P | 27PS | 27.75 | 704 | 27UP | 27UPS | 1.75 | 0.75 |
| 34.375 | 873 | 33P | 33PS | 33.75 | 857 | 33UP | 33UPS | 2 | 0.9 |
| 54.4375 | 1382 | 54P | 54PS | 53.8125 | 1366 | 54UP | 54UPS | 3 | 1.4 |
| 62.4375 | 1585 | 63P | 63PS | 61.8125 | 1570 | 63UP | 63UPS | 3.5 | 1.6 |
| — | — | — | — | 69.75 | 1771 | — | — | 3.75 | 1.7 |
| 74.5 | 1892 | 74P | 74PS | 73.875 | 1876 | 74UP | 74UPS | 4 | 1.8 |
| 86.5 | 2197 | 86P | 86PS | 85.875 | 2181 | 86UP | 86UPS | 4.5 | 2.0 |
| 96.5 | 2450 | 96P | — | — | — | — | — | 5.5 | 2.5 |

*Actual height for the stationary post includes the post cap and the leveling bolt completely tightened.



Stationary Post



Post for
Stem Caster

Autoclavable/Cart Washable Stainless Steel Post with Aluminum Cap – Mobile, for stem casters

- Autoclavable/cart washable stainless posts consist of 1" (25 mm) outside diameter 18 gauge Type 304 Stainless Steel tubing grooved at 1" increments beginning approximate 2-1/8" (54 mm) from the base of the tube. Grooves are numbered every 2" (51 mm) and there is a double groove every 8" (203 mm) to help visually identify the desired shelf position during assembly. A black anodized aluminum post cap is swaged in place at the top – pre-installed at the factory.



Stainless Post
with aluminum cap
swaged in place.



Order aluminum split sleeves with stainless "C" rings for corrosive, high-temperature autoclave or cart washing applications.

Model No. **9986S**
One bag required per shelf.

| Actual Height (in.) | (mm) | Approx. Pkd. Wt. (lbs.) | (kg) | Cat. No. Stainless Steel |
|------------------------|------|----------------------------|------|-----------------------------|
| 33.75 | 857 | 2 | 0.9 | 33UPS-SW |
| 53.8125 | 1366 | 3 | 1.4 | 54UPS-SW |
| 61.8125 | 1570 | 3.5 | 1.6 | 63UPS-SW |