




# Interlocking Thick Rubber Mat, Heavy-Duty, De-Flex<sup>®</sup>, 570

## Product Images

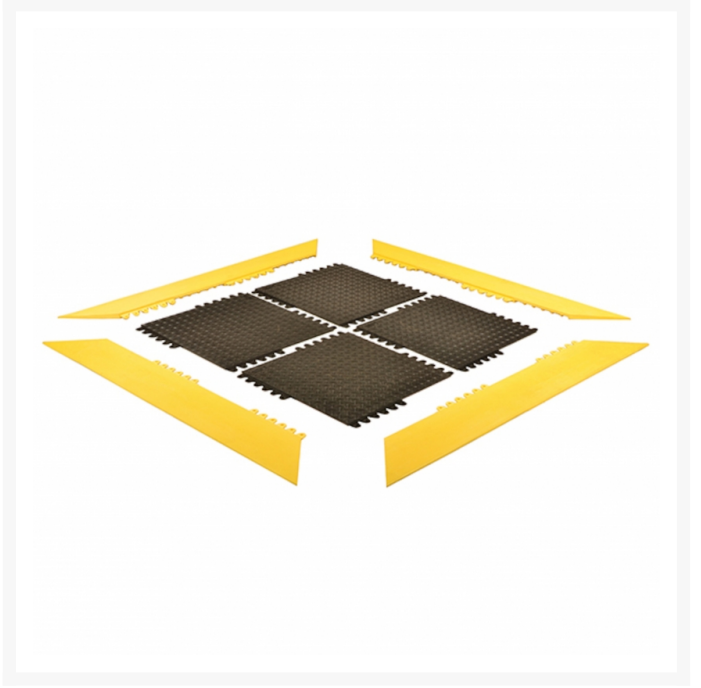

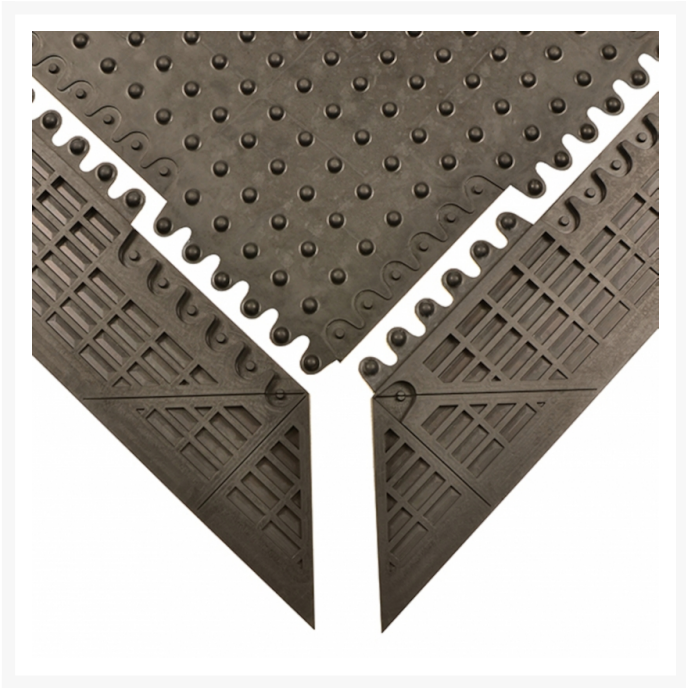

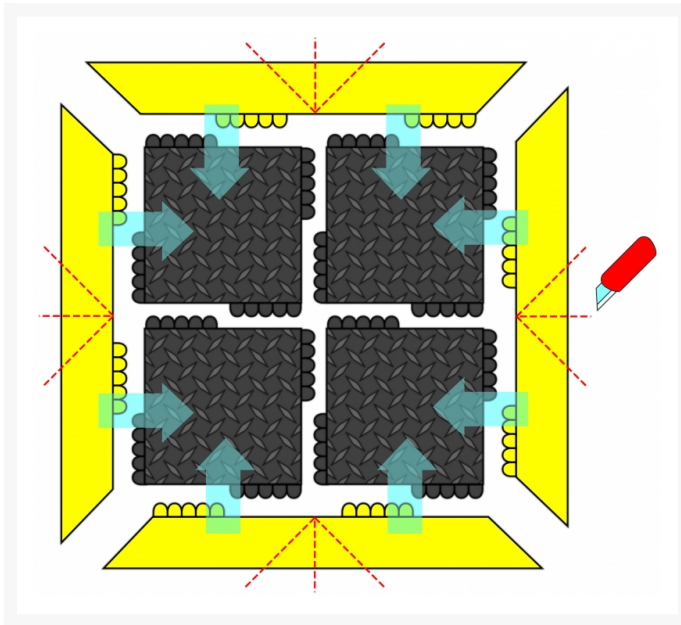

## Short Description

- Heavy-Duty 3/4-inch thick rubber interlocking floor tiles holds up to wear and tear, protects the floor, and doesn't expand and contract like vinyl
- Safe industrial floor tiles with a diamond plate design, provides workers with more traction, while still allowing them to pivot
- Rubber naturally provide more ergonomics than vinyl. 144 bullets on the bottom create more bending and flexing when exposed to a load
- Universal interlocking tile flooring system with no male/ female ends, making planning easy
- Compatible with any De-Flex® family mats
- 571 De-Flex® Ramps prevent tripping and allow for cart access

## Description

The De-Flex® heavy duty rubber mat is the latest technology in modular flooring systems. It's the ultimate

heavy duty floor mat for durability, comfort and safety. Its unique rubber formulation with bulleted domes underneath, gives this this anti fatigue mat the ability to bend and flex with every movement. The 18 x 18-in tiles allow you to create any size floor mat, and the diamond plate traction provides additional safety. Ideal for industrial floor use, this thick rubber mat is commonly used for long runs, custom configurations, or wherever heavy equipment floor mats are needed.



## Specifications

Model No	570S1818BL
Color	Black
Dimensions	18"x 18"
UPC	662641906662
Available Colors	Black
Overall Thickness	3/4
Standard sizes	18"x18"
Group	Ergonomic, Anti-fatigue & Safety Matting
Environment	Dry Areas
Special Characteristics	Available yellow borders along sides comply with OSHA code 1910-144   Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals
Recommended Use	For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
Special Remarks	Easy to make custom configurations on-site by utilizing the #571 De-Flex® Ramps
Surface	Industrial Diamond Plate
Edges	Attachable beveled edges are available
Usage Intensity	Heavy duty
Custom Description	Available attachable #571 De-Flex® Ramps
Installation	Interlocking mats allow on-site customization. Square snap-together units can be assembled effortlessly.
Material Specifications	Natural rubber
Process	Compression Molding
Pallet Quantity	224
Weight Lbs/sqft	3.24
Fire Rating US	Pass

REACH Compliant	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Anti-Fatigue Rating	Best
Slip Resistance Rating	Best
Wear Resistance Rating	Best