


OA172SAP-11-1TBXF



AC Fans - 115V
172mm x 150mm x 55mm (6.8" x 5.9" x 2.0")

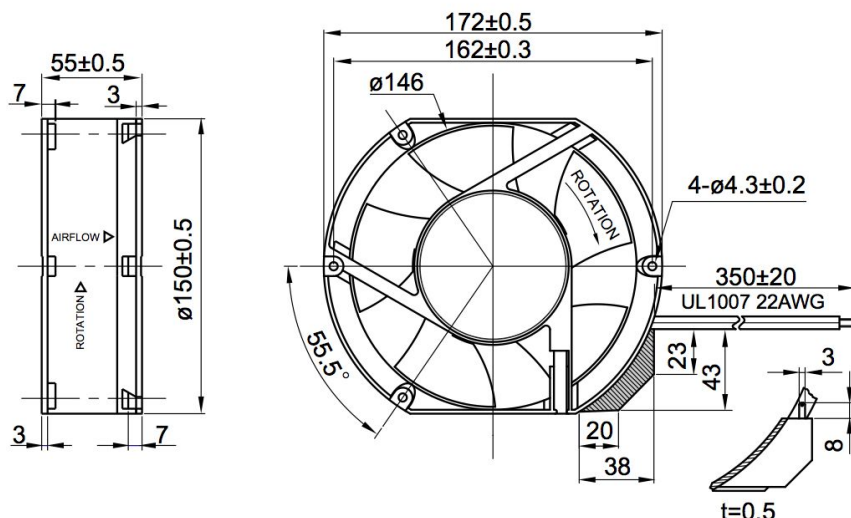

Frame	Die Cast Aluminum, Black Painted	<u>Operating Temperature</u> -40°C ~ +85°C <u>Storage Temperature</u> -40°C ~ +100°C <u>Life Expectancy</u> 60,000 Hours (L10 at 45°C) <u>Installed Options</u> Class F Insulation <u>Available Options</u> Wire Lead Type Weight: 2.7 lbs.	
Impeller	PBT, UL94 V-0 Plastic		
Connection	Terminals		
Motor	Capacitor Induction, Single Phase, Auto Cutoff, Auto Reset, Thermally Protected, Class F Insulation		
Bearing System	Ball Bearings		
Dielectric Strength	1500VAC/min, <5mA		
Insulation Resistance	≥100MΩ @ 500 VDC		

Part Number	Rated Voltage (Volts AC)	Voltage Range (Volts AC)	Frequency (Hertz)	Rated Current (Amps)	Locked Current (Amps)	Rated Power (Watts)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H ₂ O)
OA172SAP-11-1TBXF	115	100 ~ 130	50 / 60	0.34	0.76	38	3400	293	60	0.90

* 60 Hz values shown in table and PQ airflow chart.