


OA225AP IP69K Series



AC Fans - 115, 230V
225mm x 80mm (8.9" x 3.2")

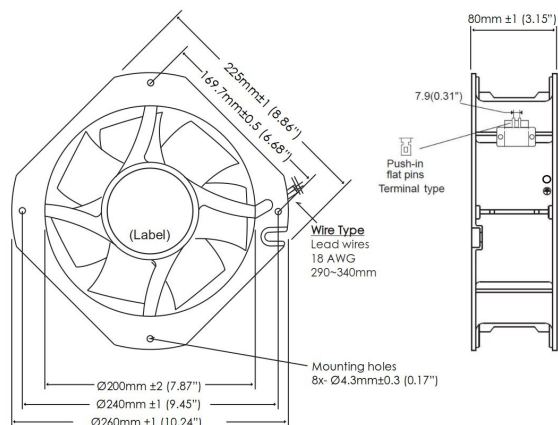

Frame	Die Cast Aluminum, Black	<u>Operating Temperature</u> -30°C ~ +80°C	60 Hz Values Shown
Impeller	Steel, All Metal, 7 Blades	<u>Storage Temperature</u> -40°C ~ +100°C	
Connection	Lead Wires 18 AWG, or Terminals	<u>Life Expectancy</u> 45,000 hours (L10 at 55°C)	
Motor	AC, Capacitor Induction, Outer Rotor, Single Phase, Thermal Protected, IP69K	<u>Available Options</u> Tachometer Output Alarm Output Other Speeds Available	
Bearing System	Ball Bearings	Weight: 4.81 lbs	
Dielectric Strength	1500VAC/min, < 5mA		
Insulation Resistance	≥100MΩ at AC 500V		

Part Number	Rated Voltage (Volts AC)	Voltage Range (Volts AC)	Input Power (Watts)	Frequency (Hz)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H ₂ O)
OA225AP-11-1*BIP69K	115	100 ~ 130	60 / 80	50 / 60	2700 / 3100	540 / 620	66.2	0.74
OA225AP-22-1*BIP69K	230	200 ~ 255	60 / 80	50 / 60	2700 / 3100	540 / 620	66.2	0.74

*Insert "T" for Terminal or "W" for Lead Wire