





## Cable Tie Plates

- Slotted mounting hole accommodates various fastener spacing
- Low profile design keeps bundle close to mounting surface
- For indoor use only
- Material: Nylon 6.6





| Part Number | Used with Cable Ties† | Length A |      | Width B |      | Height C |     | Hole Spacing D |      | Color   | Mounting Method | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|-----------------------|----------|------|---------|------|----------|-----|----------------|------|---------|-----------------|----------------|----------------|
|             |                       | In.      | mm   | In.     | mm   | In.      | mm  | In.            | mm   |         |                 |                |                |
| TP2-C       | M, I, S               | 1.98     | 50.3 | .50     | 12.7 | .13      | 3.2 | 1.60           | 40.6 | Natural | #10 (M5) Screw  | 100            | 1000           |
| TP4H-C      | M, I, S, HS, LH, H    | 3.08     | 78.2 | .62     | 15.7 | .20      | 5.2 | 2.50           | 63.5 | Natural | 1/4 (M6) Screw  | 100            | 1000           |

†Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard, HS = Heavy-Standard, LH = Light-Heavy and H = Heavy.



## Multiple Tie Plates

- Used to secure closely spaced wire bundles
- Low profile design keeps bundle close to mounting surface
- For indoor use only
- Material: Nylon 6.6

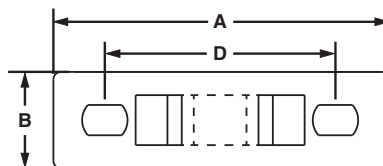

| Part Number | No. of Bundles | Used with Cable Ties† | Length A |      | Width B |      | Height C |     | Hole Spacing D |      | Mounting Method | Mil. Std. Part Number | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|----------------|-----------------------|----------|------|---------|------|----------|-----|----------------|------|-----------------|-----------------------|----------------|----------------|
|             |                |                       | In.      | mm   | In.     | mm   | In.      | mm  | In.            | mm   |                 |                       |                |                |
| MTP1S-E6-C  | 1              | M, I, S               | 1.75     | 44.5 | .50     | 12.7 | .13      | 3.2 | 1.25           | 31.8 | #6 (M3) Screw   | MS3339-1-9            | 100            | 1000           |
| MTP1S-E10-C |                |                       | 1.75     | 44.5 | .50     | 12.7 | .13      | 3.2 | 1.25           | 31.8 | #10 (M5) Screw  | —                     | 100            | 1000           |
| MTP1H-E6-C  |                | M, I, S, HS, LH, H    | 2.09     | 53.1 | .63     | 16.0 | .20      | 5.2 | 1.50           | 38.1 | #6 (M3) Screw   | MS3339-6-9            | 100            | 1000           |
| MTP1H-E10-C |                |                       | 2.09     | 53.1 | .63     | 16.0 | .20      | 5.2 | 1.50           | 38.1 | #10 (M5) Screw  | —                     | 100            | 1000           |
| MTP2S-E6-C  | 2              | M, I, S               | 3.00     | 76.2 | .50     | 12.7 | .13      | 3.2 | 2.50           | 63.5 | #6 (M3) Screw   | MS3339-2-9            | 100            | 1000           |
| MTP2S-E10-C |                |                       | 3.00     | 76.2 | .50     | 12.7 | .13      | 3.2 | 2.50           | 63.5 | #10 (M5) Screw  | —                     | 100            | 1000           |
| MTP2H-E6-C  |                | M, I, S, HS, LH, H    | 3.59     | 91.2 | .63     | 16.0 | .20      | 5.2 | 3.00           | 76.2 | #6 (M3) Screw   | MS3339-7-9            | 100            | 1000           |
| MTP2H-E10-C |                |                       | 3.59     | 91.2 | .63     | 16.0 | .20      | 5.2 | 3.00           | 76.2 | #10 (M5) Screw  | —                     | 100            | 1000           |

†Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard, HS = Heavy-Standard, LH = Light-Heavy and H = Heavy.

Table continues on page B2.16