


B1



Push Mounts

- Require no adhesive or additional mounting hardware
- Can be used where only one side of the panel is accessible

B2



B3

C1

| Part Number | Used with Cable Ties‡ | Max. Panel Thickness | | Panel Hole Diameter | | Material | Color | Environment | Mounting Method | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|-----------------------|----------------------|-----|---------------------|-----|-----------------------------|---------|-------------|-----------------|----------------|----------------|
| | | In. | mm | In. | mm | | | | | | |
| PM2H25-C | M, I, S | 0.125 | 3.2 | 0.250 | 6.4 | Nylon 6.6 | Natural | Indoors | Push Barb | 100 | 500 |
| PM2H25-M0 | M, I, S | 0.125 | 3.2 | 0.250 | 6.4 | Weather Resistant Nylon 6.6 | Black | Outdoors | Push Barb | 1000 | 5000 |
| PM2H25-M30 | M, I, S | 0.125 | 3.2 | 0.250 | 6.4 | Heat Stabilized Nylon 6.6 | Black | Indoors | Push Barb | | |

‡Cable tie cross section sizes: M = Miniature, I = Intermediate, and S = Standard.

C4


D1



Push Button Mounts

- Require no adhesive or additional mounting hardware
- Designed for use where both sides of the panel are accessible

D2

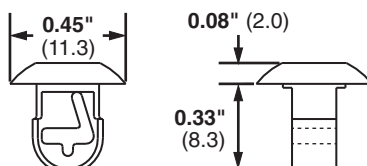

D3

E1

| Part Number | Used with Cable Ties‡ | Max. Panel Thickness | | Panel Hole Diameter | | Material | Color | Environment | Mounting Method | Std. Pkg. Qty. | Std. Ctn. Qty. |
|----------------|-----------------------|----------------------|-----|---------------------|-----|-----------------------------|---------|-------------|-----------------|----------------|----------------|
| | | In. | mm | In. | mm | | | | | | |
| PBMS-H25-C | M, I, S | 0.13 | 3.2 | 0.250 | 6.4 | Nylon 6.6 | Natural | Indoors | Push Barb | 100 | 1000 |
| PBMS-H25-C14 | | 0.13 | 3.2 | 0.250 | 6.4 | Nylon 6.6 | Gray | | | | |
| PBMS-H25-M0 | M, I, S | 0.13 | 3.2 | 0.250 | 6.4 | Weather Resistant Nylon 6.6 | Black | Outdoors | Push Barb | 1000 | 5000 |
| PBMS-H25-M30 | M, I, S | 0.13 | 3.2 | 0.250 | 6.4 | Heat Stabilized Nylon 6.6 | Black | Indoors | Push Barb | 1000 | 5000 |
| PBMSL-H25-M30* | | 0.29 | 7.2 | 0.250 | 6.4 | | | | | | |

‡Cable tie cross section sizes: M = Miniature, I = Intermediate, and S = Standard.

*not cULus listed

F

G

H