


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

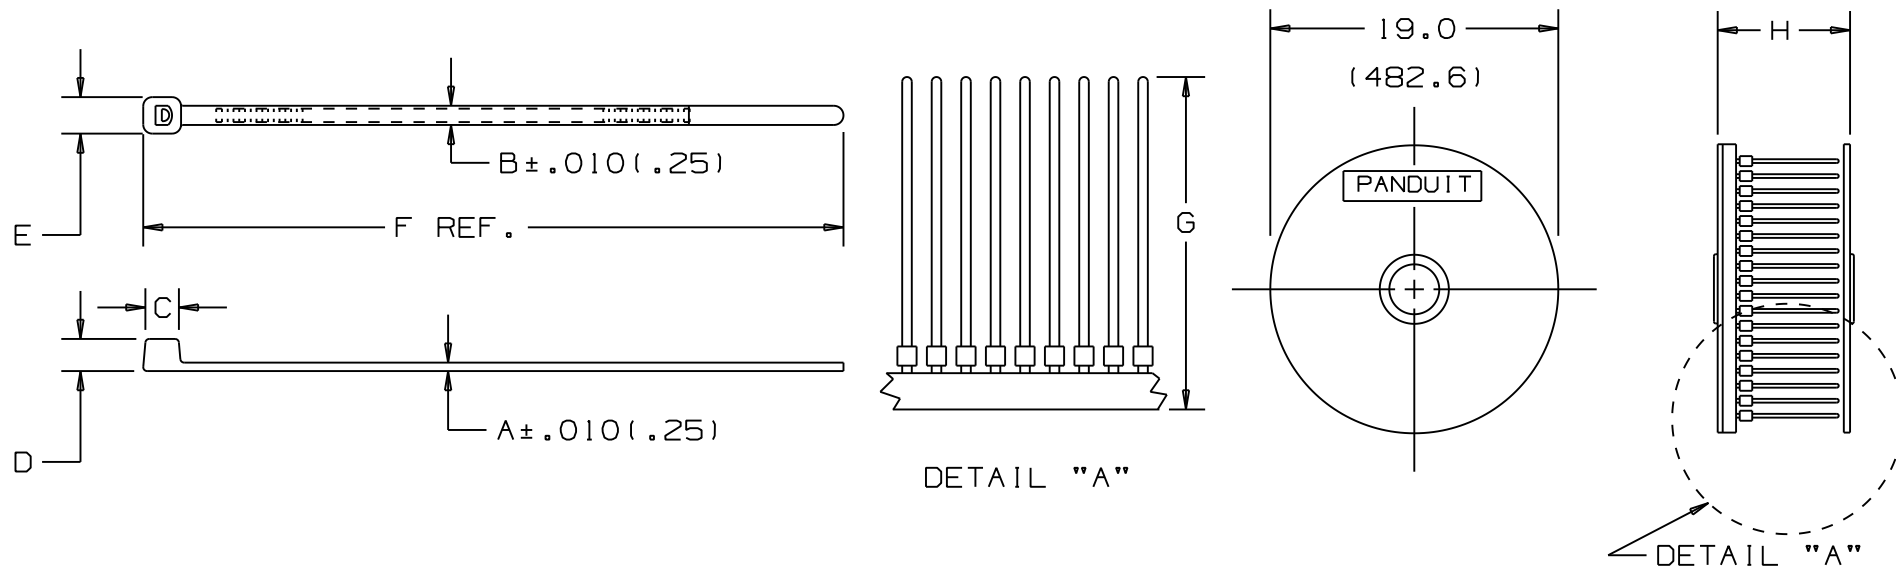

PANDUIT PART NO.*	BUNDLE DIA.		A IN. (mm)	B IN. (mm)	C IN. (mm)	D IN. (mm)	E IN. (mm)	F IN. (mm)	G IN. (mm)	H IN. (mm)	MINIMUM LOOP TENSILE lbs. (N)	CROSS SECTION	WEIGHT lbs. (g) /100 pcs
	MIN IN. (mm)	MAX IN. (mm)											
PLT2S-VMR	.06 (1.5)	1.94 (49.3)	.047 (1.2)	.190 (4.8)	.258 (6.6)	.220 (5.6)	.316 (8.0)	8.1 (206)	8.5 (216)	9.3 (236)	50 (222)	STANDARD	.32 (147)
PLT3S-VMR		2.75 (69.9)											.38 (174)

- NOTES:
- 1) SEE www.panduit.com FOR PART MATERIAL & COLOR SUFFIX DESIGNATIONS.
 - 2) STANDARD PACKAGING: 2500 STRAPS PER REEL; 2 REELS PER CARTON (2S), 1 REEL PER CARTON (3S)
 - 3) PACKAGED FOR USE WITH PAT2S AND PAT3S TOOLS AND DISPENSERS.
 - 4) LISTED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC.

										CAD FILENAME/LAYERS		W10030BY/02 SS-26588		
										DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS				
										PANDUIT CORP. TINLEY PARK, ILLINOIS VMR PAN-TY CABLE TIES PACKAGED FOR AUTOMATIC TOOLS				
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ±.10(2.5) (.XXX) ±.020(.51) (.XX) ±.02(.5) ANGLES ±		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.		
										DRAWN BY RAM	MAT'L: NYLON 6.6		SCALE NONE	
2	11/6/08	TRAM		NEW ROW ADDED FOR PLT3S, CHANGED 2S MAX BUNDLE			25688	2					DATE 4/8/92	DRAWING NO. SS-26588
REV	DATE	BY	CHK	DESCRIPTION			ECN	-	R	CUST	SUP	CHK'D HVP	SIZE	