



Best in Class Outlet Density

Optimal Form Factors

Superior Reliability

smartzone™ G5



---

## Security and Environmental Monitoring Solutions With Panduit® SmartZone™ G5 iPDU Solution

**PANDUIT®**

# Security Solution

- 1 pc. Panduit® Net-Access™ Cabinet S-Type (single hinged front door and split hinged rear doors)
- 2 pc. iPDUs (intelligent pdu series: Metered Input, Monitored Per Outlet, Metered and Switched, Metered- and Switched Per Outlet)
- 1 pc. Electronic Lock with HID card (ACE02) - 125khz or (ACE03) - 13.56mhz in the front door (cold aisle)
- 1 pc. Electronic Lock with HID card (ACE02) - 125khz or (ACE03) - 13.56mhz in the rear door (hot aisle)
- 1 pc. Access Hub (ACB01), sits in front door, Door Switch (ACA01) is included and hard-wired
- 1 pc. Access Hub (ACB01), sits in the rear door, Door Switch (ACA01) is included and hard-wired
- 1 pc. cable harness (ACB02) in front door, connects the access hub (ACB01) to the swinghandle. ACB01 connects to the iPDU via RJ45 patch cord (not included)
- 1 pc. cable harness (ACB03) in rear door, connects the access hub (ACB01) to the swinghandle. ACB01 connects to the iPDU via RJ45 patch cord (not included).

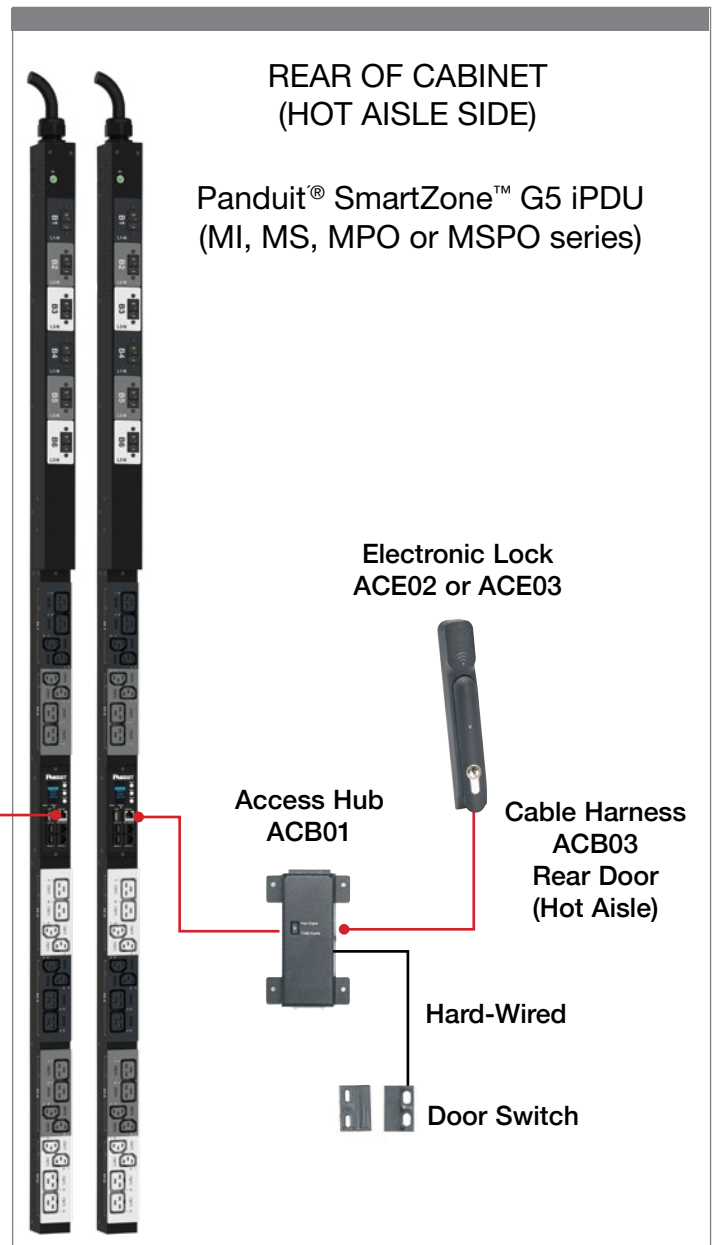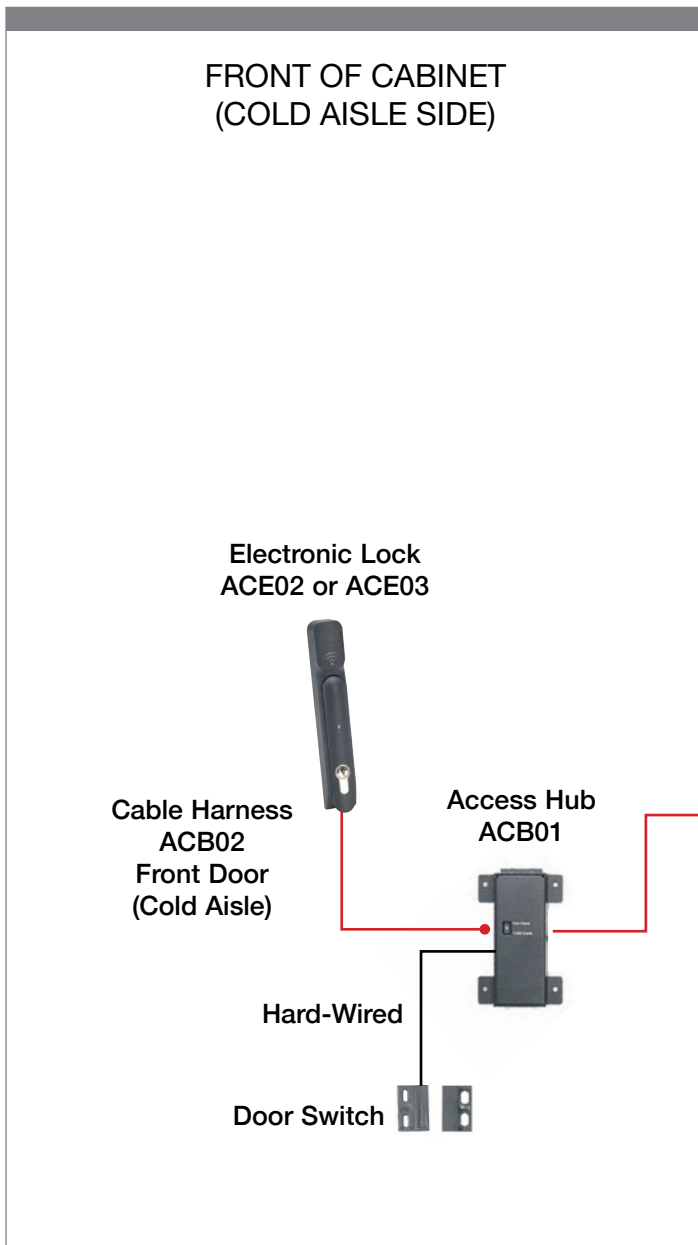

# Environmental Solution

- 1 pc. Panduit® Net-Access™ Cabinet S-Type (single hinged front door and split hinged rear doors)
- 2 pc. iPDUs (intelligent pdu series: Metered Input, Monitored Per Outlet, Metered and Switched, Metered and Switched Per Outlet)
- 1 pc. 3-way Temperature & Humidity Sensor (EC001), in the front door
- 1 pc. Temperature Sensor (EA001), in the rear door

FRONT OF CABINET  
(COLD AISLE SIDE)

3 Temperature and  
1 Humidity Sensor - EC001



REAR OF CABINET  
(HOT AISLE SIDE)

Panduit® SmartZone™ G5 iPDU  
(MI, MS, MPO or MSPO series)

Temperature Sensor - EA001



# Security and Environmental Solution

- 1 pc. Panduit® Net-Access™ Cabinet S-Type (single hinged front door and split hinged rear doors)
- 2 pc. iPDUs (intelligent pdu series: Metered Input, Monitored Per Outlet, Metered and Switched, Metered-and Switched Per Outlet)
- 1 pc. Electronic Lock with HID card (ACE02), in the front door (cold aisle)
- 1 pc. Electronic Lock with HID card (ACE02), in the rear door (hot aisle)
- 1 pc. Access Hub (ACB01), sits in front door, Door Switch (ACA01) is included and hard-wired
- 1 pc. Access Hub (ACB01), sits in the rear door, Door Switch (ACA01) is included and hard-wired
- 1 pc. cable harness (ACB02) in front door, connects the access hub (ACB01) to the swinghandle. ACB01 connects to the iPDU via RJ45 patch cord (not included).
- 1 pc. cable harness (ACB03) in rear door, connects the access hub (ACB01) to the swinghandle. ACB01 connects to the iPDU via RJ45 patch cord (not included).
- 1 pc. 3-way Temperature and Humidity Sensor (EC001), in the front door
- 1 pc. Temperature Sensor (EA001), in the rear door

