



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	***=LENGTH (M)
AX23NS2S2AQM***	001±.2
	002±.2
	003±.2
	005±.2
	007±.2
	010±.2
	015±.3
	020±.4
	025±.5
	030±.6

- NOTES:
- DESCRIPTION: ACTIVE OPTICAL CABLE ASSY, OM3, 2F, 3.0MM, NON-RATED PVC, SFP28 TO SFP28, AQUA, LENGTH IN METERS
 - COMPLIANT
IEEE STD 802.3ae: PHYSICAL LAYER SPECIFICATIONS AND MANAGEMENT PARAMETERS
SFF-8431: GENERAL ELECTRICAL
SFF-8432: PLUGGABLE MODULE
SFF-8472: MANAGEMENT INTERFACE
 - SUPPORTS 25Gb/s PER CHANNEL.
 - CABLE ASSEMBLY IMPEDANCE: 100±10ohm.
 - LOW POWER CONSUMPTION OF MAX 0.8W, HOT PLUGGABLE ELECTRICAL INTERFACE.
 - 0 TO 70° C CASE TEMPERATURE OPERATING RANGE.
 - ALL MATERIAL MUST COMPLY WITH RoHS 2.0
 - ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

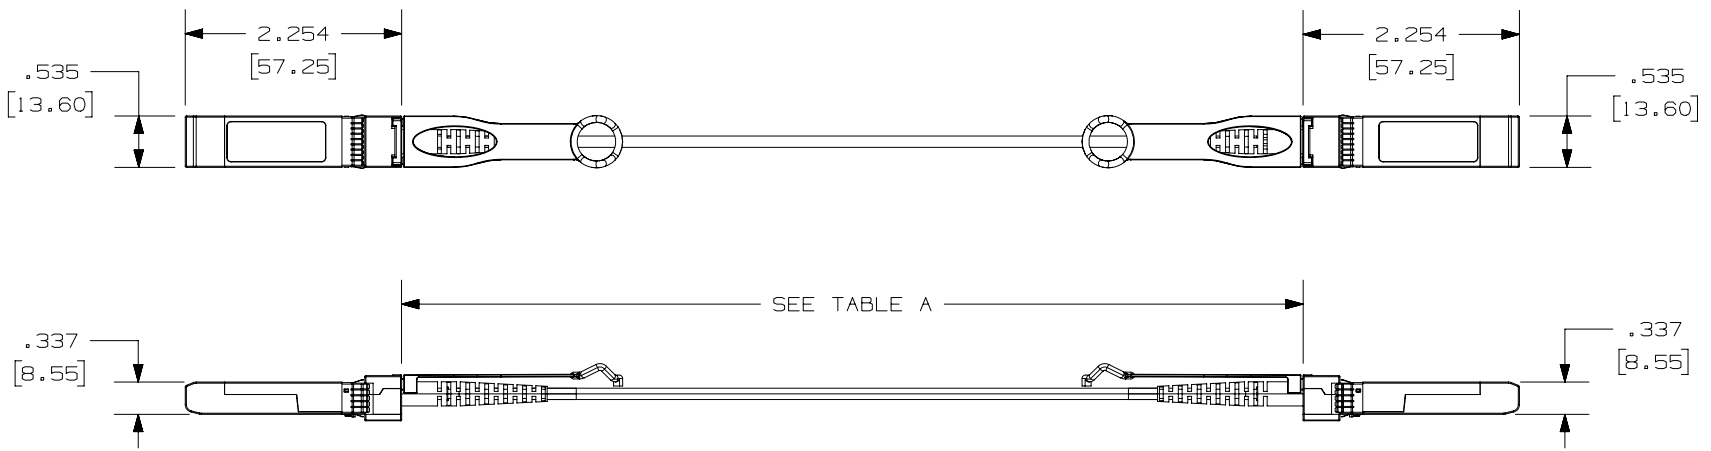

FOR PRODUCT LENGTH LESS THAN/EQUAL TO 3m THE FANOUT LENGTH WILL BE 2/3 TOTAL LENGTH.
FOR PRODUCT LENGTH GREATER THAN 3m THE FANOUT LENGTH WILL BE 3m.



PART NUMBER		SEE TABLE A		
TITLE				
SFP28 (25G) to SFP28 (25G)				
CUSTOMER DRAWING				
ITEM REVISION NAME		00630EAB/01		
DATASET FILE NAME		00630EAB_DC/01A		
MATERIAL		THIRD ANGLE PROJECTION		
DRAWING NUMBER		00630EAB-DC		
REV	DATE	BY	CHK	SCALE
01A	12-15-20	SAT	PJI	NONE
DESCRIPTION		SHEET 1 OF 1		
ECN		A		

A-SIZE CUSTOMER