


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



TABLE A	
PANDUIT P/N	***=LENGTH (M)
AXB3NQPSAQM***	001±.2
	002±.2
	003±.2
	005±.2
	007±.2
	010±.2
	015±.3
	020±.4
	025±.5
	030±.6

NOTES:

- DESCRIPTION: ACTIVE OPTICAL CABLE ASSY, OM3, 8F, 3.0MM, NON-RATED PVC, QSFP+ TO SFP+, AQUA, LENGTH IN METERS
- SUPPORTS 10.3125Gb/s PER CHANNEL.
- CABLE ASSEMBLY IMPEDANCE: 100±10ohm.
- LOW POWER CONSUMPTION OF MAX 0.8W, HOT PLUGGABLE ELECTRICAL INTERFACE.
- 0 TO 70°C CASE TEMPERATURE OPERATING RANGE.
- ALL MATERIAL MUST COMPLY WITH RoHS 2.0
- ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

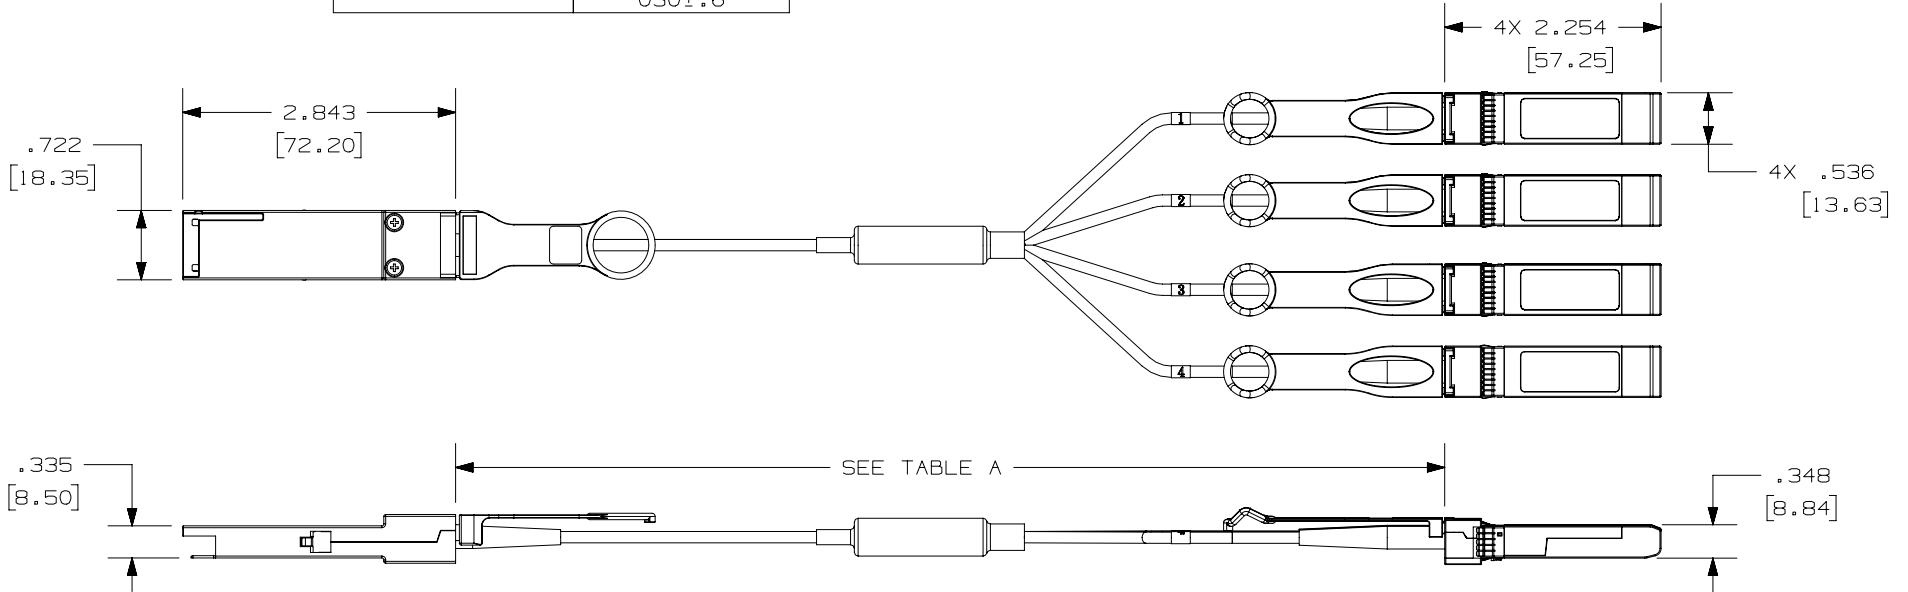

FOR PRODUCT LENGTH LESS THAN/EQUAL TO 3m THE FANOUT LENGTH WILL BE 2/3 TOTAL LENGTH.
 FOR PRODUCT LENGTH GREATER THAN 3m THE FANOUT LENGTH WILL BE 3m.



PART NUMBER		SEE TABLE A	
TITLE			
QSFP+ Breakout: QSFP+ (40G) to 4 SFP+ (10G)			
CUSTOMER DRAWING			
ITEM REVISION NAME		00630EAE/01	
DATASET FILE NAME		00630EAE_DC/01A	
MATERIAL		THIRD ANGLE PROJECTION	
DRAWING NUMBER		00630EAE-DC	
DRAWN BY	DATE	CHK	SCALE
SAT	12-14-20	PJI	NONE
SHEET 1 OF 1			SIZE
A			A

01A	12-15-20	SAT	PJI	DDH	INITIAL RELEASE	00630EAE-DC
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN