


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART #	WIRE SIZE AWG	DIMENSIONS - in [mm]			
		A ± .03 [0,8]	B ± .01 [0,3]	C ± .01 [0,3]	D ± .03 [0,8]
BSN22	26-22	.79 [20,1]	.08 [2,0]	.04 [1,0]	.47 [11,9]

INSTALLATION TOOLS
CT-520
CT-1525 (A POCKET)
CT-2500 (CT-2525CH: A PKT)

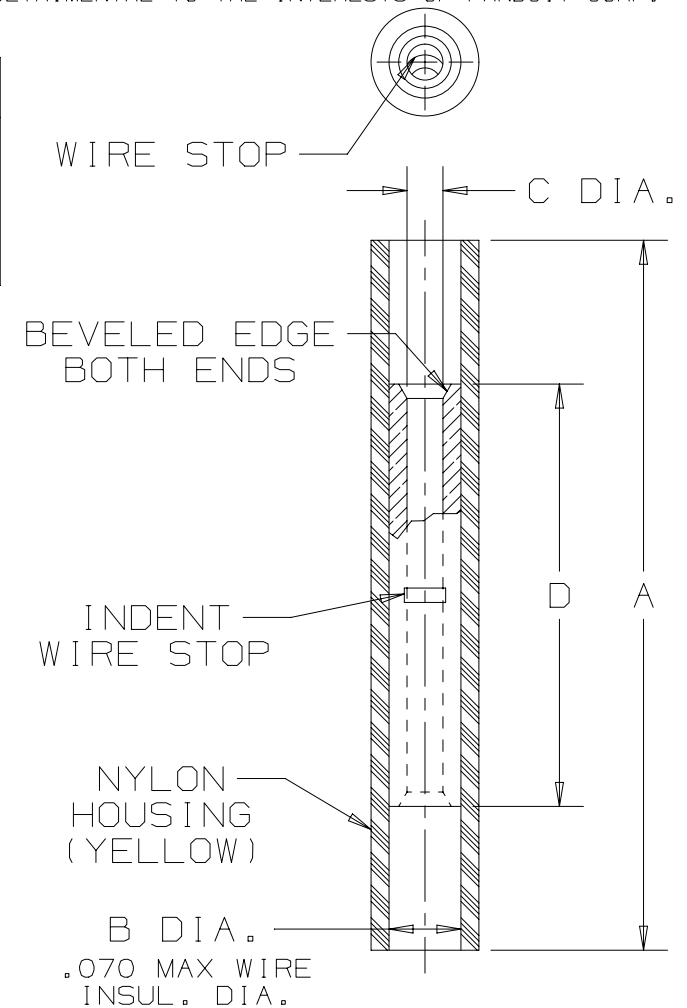

NOTES:

- RECOMMENDED FOR:
 - #26-22 AWG SOLID OR STRANDED COPPER WIRE
 - 221°F [105°C] MAX TEMP. RATING
 - 600V MAX VOLTAGE RATING
- MATERIAL:
 - STAMPING: .02" [0,5] THK COPPER, TIN PLATED
 - HOUSING: NYLON, YELLOW
- SEE www.panduit.com FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- WIRE STRIP LENGTH: $1/4" \begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ [6,4mm $\begin{smallmatrix} +0,8 \\ -0 \end{smallmatrix}$]

TITLE					
BUTT SPLICE, NYLON INSULATED #26-22 AWG					
CONTROL DRAWING					
ITEM REVISION NAME					
N41337BA/08					
DATASET FILE NAME			MATERIAL :		
N41337BA_DC/08					
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			SEE NOTES		
.x ± .1 [2.54] .xx ± .01 [.25] .xxx ± .005 [.127] ANGLES ± 5 °					
			DRAWING NUMBER:		
THIRD ANGLE PROJECTION			A41337		
DRAWN BY	DATE	CHK	SCALE	SIZE	
DAW	-	-	NONE	SHT 1 OF 1	A