


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

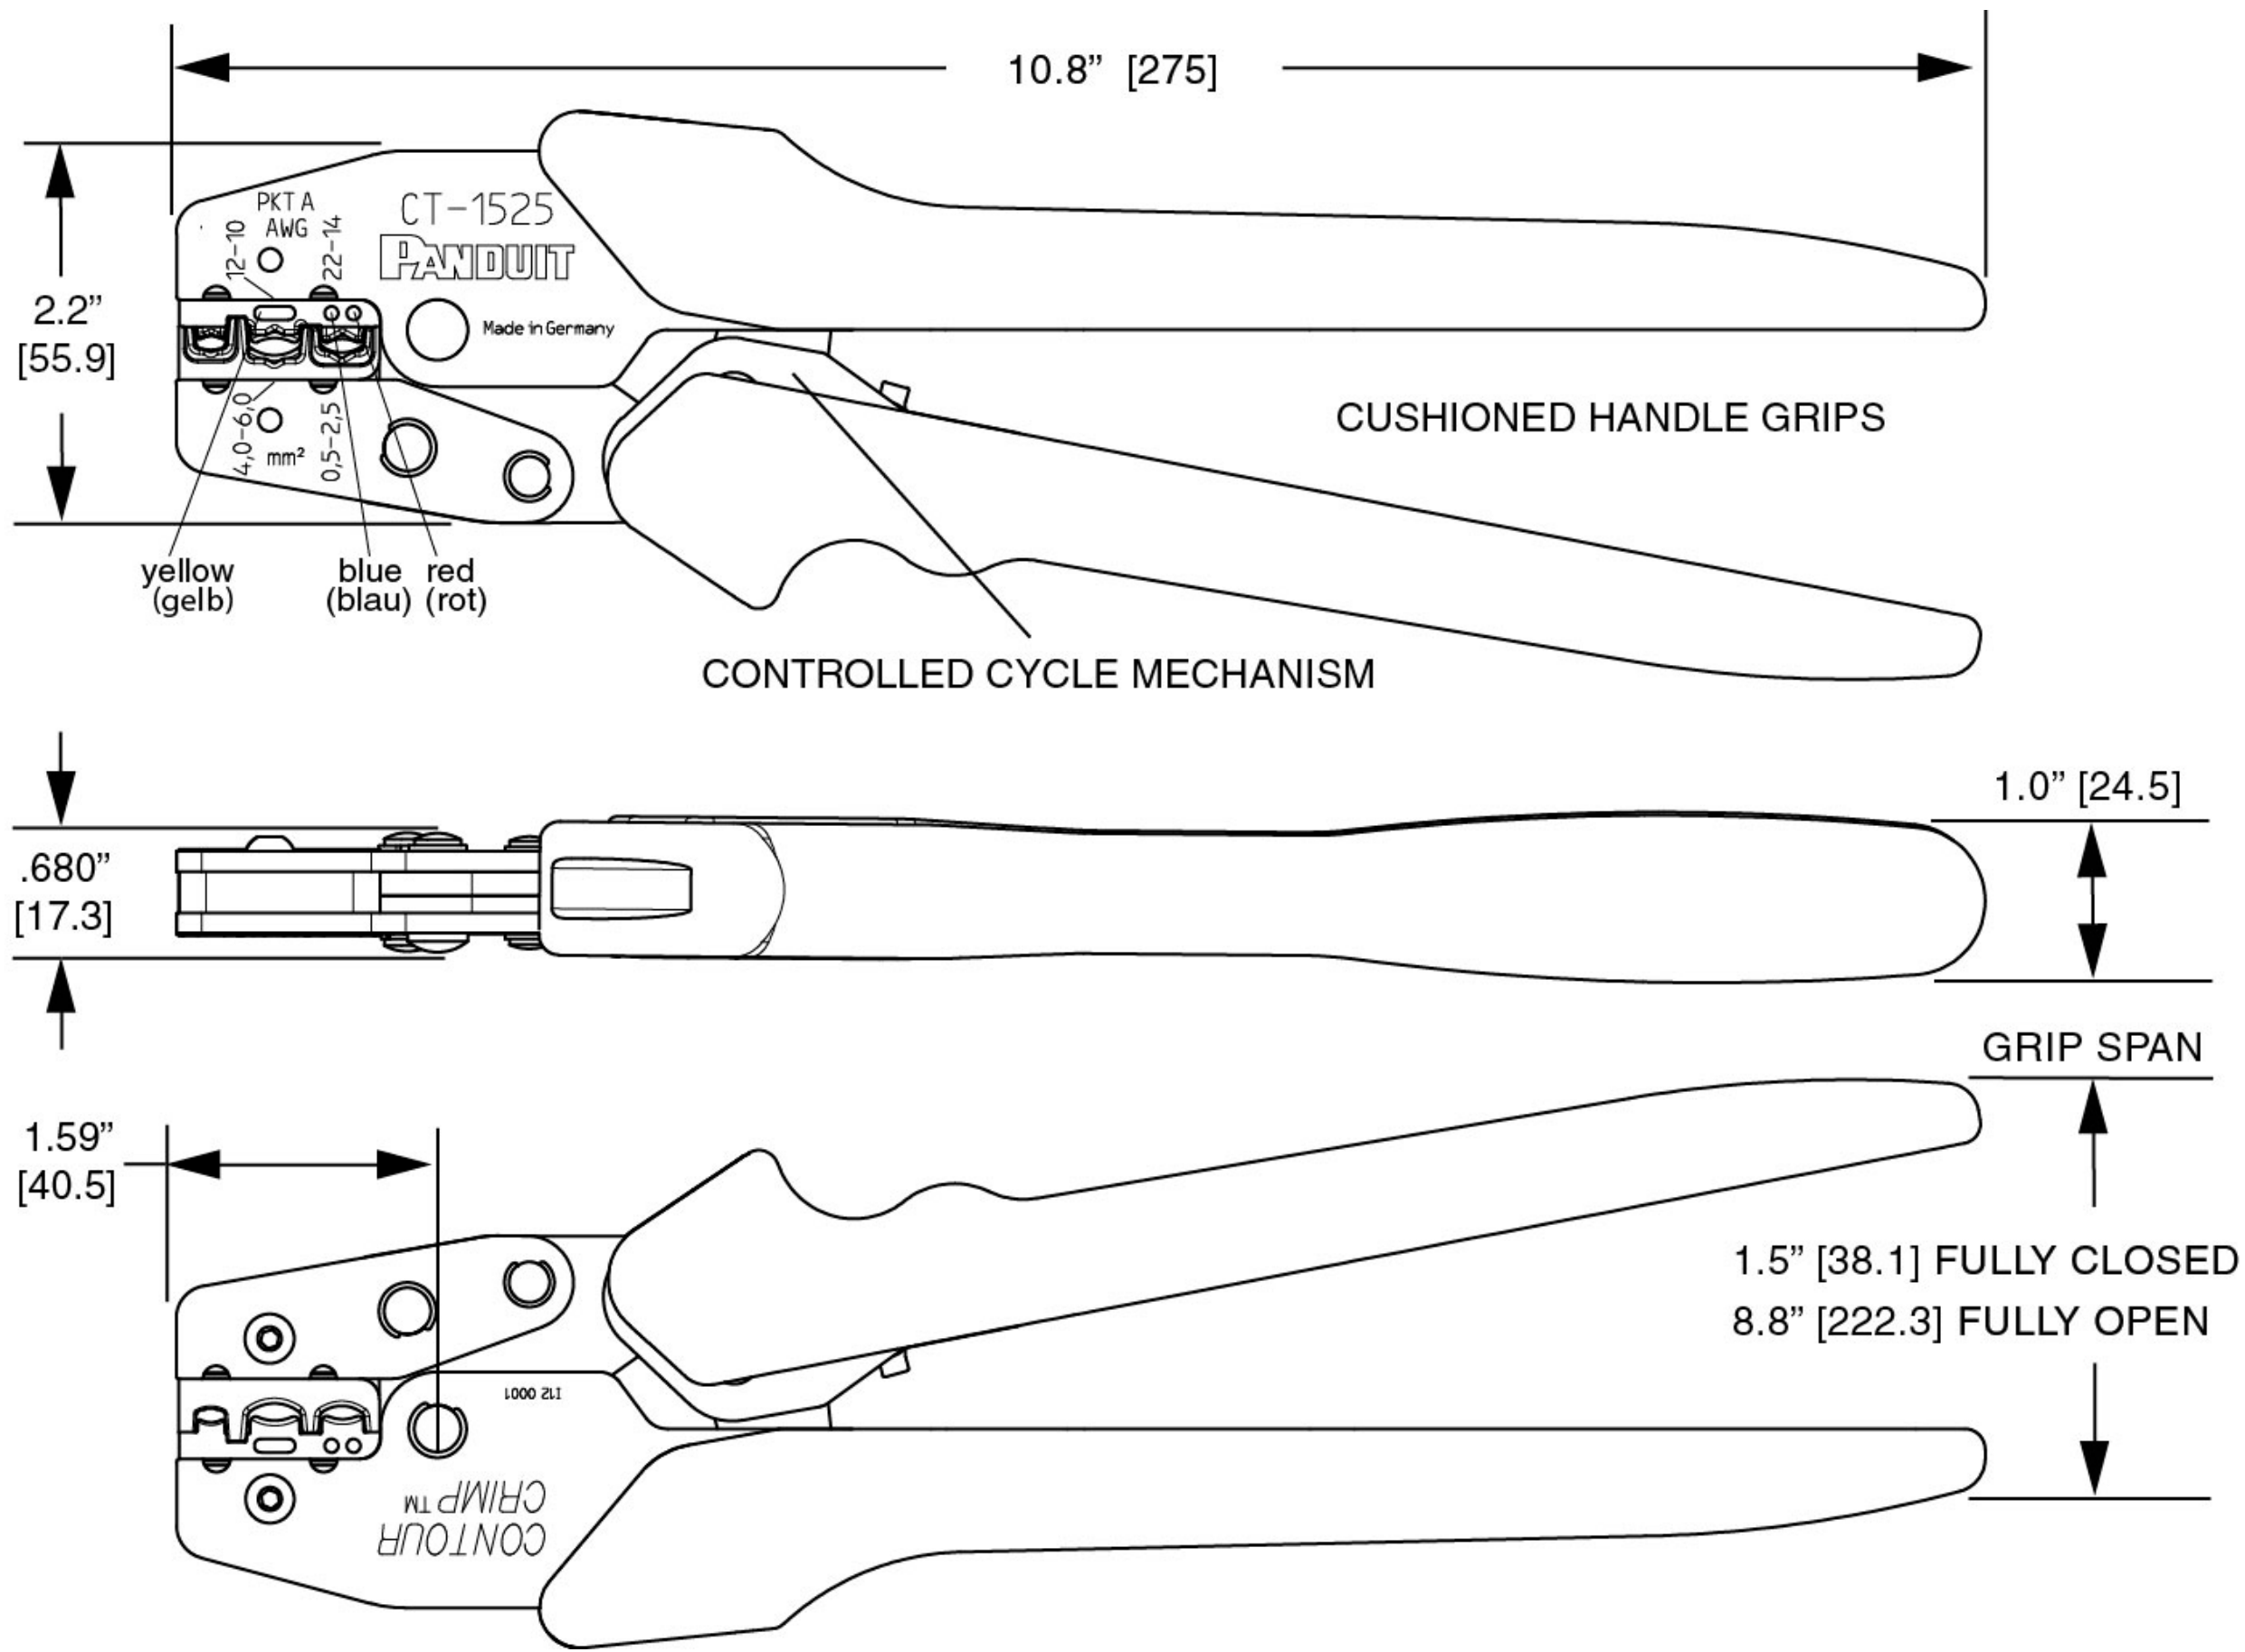

NOTES, UNLESS OTHERWISE SPECIFIED:

PANDUIT CT-1525 TOOL:

TOOL WEIGHT: 27.2 oz. [77] kg

Crimps Panduit #26-#22 AWG insulated terminals/splices, #22-#10 AWG fully insulated disconnects/insulated parallel splices; and specific #22-14 AWG barrel insulated disconnects.

Provides UL Listed and CSA Certified terminations with applicable Panduit terminals.

DIMENSIONS SHOWN IN BRACKETS [] ARE METRIC, AND ARE FOR REFERENCE ONLY.

CRIMP POCKET AWG / mm ²	ENGLISH GO / NO GO GAGE MEMBERS		METRIC GO / NO GO GAGE MEMBERS	
	"G" Dia. (GO)	"NG" Dia. (NO GO)	"G" Dia. (GO)	"NG" Dia. (NO GO)
Pocket A	.083"	.091"	2,11 mm	2,31 mm
22-14/0,5-2,5	.076"	.084"	1,93 mm	2,13 mm
12-10/4,0-6,0	.100"	.108"	2,54 mm	2,74 mm

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY: BLR				DATE: 5-08-15	CHK: BJPU	SCALE: NONE	SHT 1 OF 1	SIZE C
03	1-17-17	BLR	BJPU	JADE	UPDATE TOOL GRAPHIC; ADD GO/NO-GO CHART	11190									
02	5-08-15	BLR	BJPU	ABJ	REDRAWN; UPD BRANDING	4857									
							CT-1525 Contour Crimp™ Crimping Tool				CUSTOMER DRAWING				
							ITEM REVISION NAME: TP23624C01_03				PANDUIT				
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:				MATERIAL: -----				
							(.x) ± --- (.xxx) ± --- (.xx) ± --- ANGLES ± ---				DRAWING NUMBER: TP23624C01				
							THIRD ANGLE PROJECTION				SHT 1 OF 1				