

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	TAB SIZE	WIRE RANGE		COLOR	MAX. WIRE INSUL. DIA.	DIMENSIONS in. [mm]			
		ENGLISH	METRIC			L ± .03 [0,8]	H ± .01 [0,3]	W ± .01 [0,3]	D ± .03 [0,8]
DNFR18-250B	.250 X .032 [6,3 X 0,8]	22-18	0,5-1,0	RED	.13 [3,3]	.78 [19,8]	.20 [5,1]	.36 [9,1]	.62 [15,7]
DNFR14-250B	.250 X .032 [6,3 X 0,8]	16-14	1,5-2,5	BLUE	.16 [4,1]				.63 [16,0]
DNFR18-205B	.205 X .032 [5,2 X 0,8] OR .187 X .020 [4,8 X 0,5]	22-18	0,5-1,0	RED	.13 [3,3]				.62 [15,7]
DNFR14-205B		16-14	1,5-2,5	BLUE	.16 [4,1]				.63 [16,0]
DNFR18-206B		22-18	0,5-1,0	RED	.13 [3,3]				.62 [15,7]
DNFR14-206B		16-14	1,5-2,5	BLUE	.16 [4,1]				.63 [16,0]




LISTED  
20H3  
E78522



CERTIFIED  
LR31212

NOTES:

- USED FOR:
  - A. STRANDED COPPER WIRE ONLY
  - B. 221°F [105°C] MAX. OPERATING TEMPERATURE
  - C. 600 V. MAX. VOLTAGE RATING
- MATERIAL:
  - A. STAMPING: .018 [0,46] TIN PLATED BRASS
  - B. HOUSING: NYLON
- INSTALLATION TOOLS: CT-1525, CT-2500 (CT-2525CH)
- WIRE STRIP LENGTH: 9/32 <sup>+1/32</sup>/<sub>0</sub> [7,1 <sup>+0,8</sup>/<sub>0</sub>]
- SEE [www.panduit.com](http://www.panduit.com) FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- FIRST INSERTION FORCE: 12 Lb [53 N] MAXIMUM  
FIRST WITHDRAWAL FORCE: 12 Lb [53 N] MAXIMUM  
6 Lb [27 N] MINIMUM

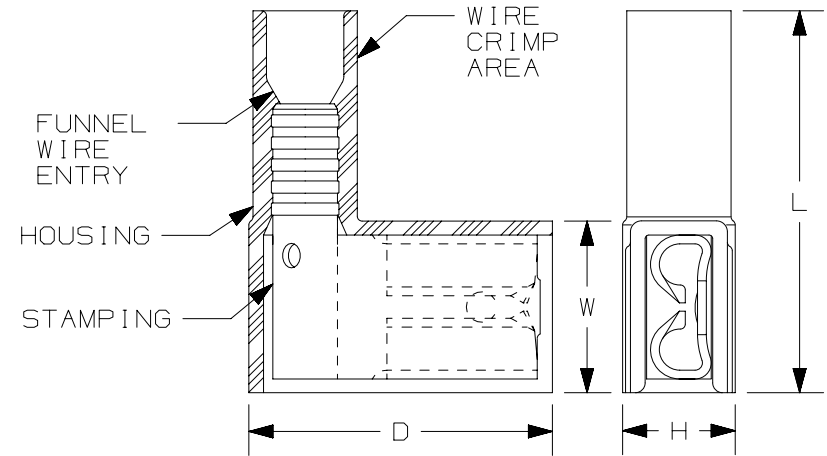

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
09	10.18.12	JBN	LSM	VMB	UPDATED DRAWING TO CURRENT STANDARDS	A41329

TITLE <b>RIGHT ANGLE FEMALE DISCONNECT, NYLON INSULATED, FUNNEL ENTRY</b>	
CUSTOMER DRAWING	
ITEM REVISION NAME N41329BA/09	<b>PANDUIT</b> <sup>TM</sup>
DATASET FILE NAME N41329BA_DC/09A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54]      .xxx ± .005 [.127] .xx ± .01 [.25]      ANGLES ± 5°	
MATERIAL: <b>SEE NOTES</b>	
DRAWING NUMBER: A41329	
DRAWN BY DAW	DATE -
CHK RLS	SCALE N.T.S.
SHEET 1 OF 1	
SIZE A	

D10100DA/12