
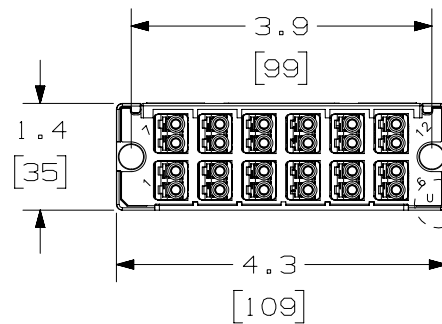


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

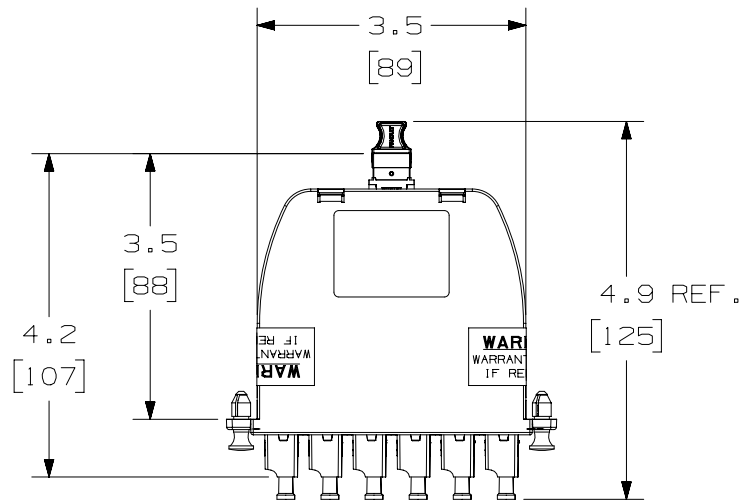


FRONT VIEW


SHOWN W/O DUSTCAPS

SEE SHEETS 2 AND 3
FOR ARTWORK DETAILS

NOTES:

1. SEE CURRENT CATALOG FOR PART NUMBER SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITIES.
2. SEE CATALOG FOR COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
3. PART NUMBERS:
 - A. SEE SHEET 2 FOR METHOD A.
 - B. SEE SHEET 3 FOR MODIFIED METHOD A, PAIR FLIPPED.
4. METHOD A CASSETTES COMPLY WITH ANSI/TIA-568-C.O. SEE ANSI/TIA-568-C.O FOR POLARITY DETAILS AND EXAMPLES OF A BASIC LINK.
5. MATERIALS:
 - A. BOX AND LID: PLASTIC
 - B. ADAPTER: COMPOSITE PLASTIC
6. CASSETTE WEIGHT: 4.16oz [118g]
7. DIMENSIONS IN BRACKETS ARE METRIC.

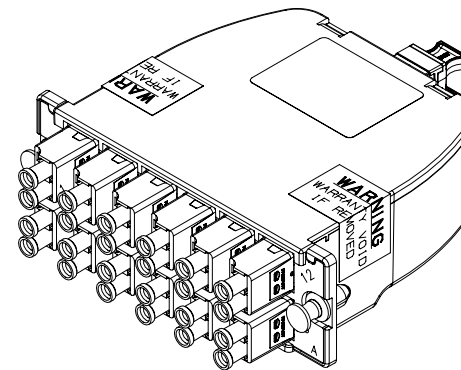


TITLE		24 FIBER DUPLEX LC CASSETTE METHOD A AND MODIFIED METHOD A, PAIR FLIPPED	
ITEM REVISION NAME		CUSTOMER DRAWING	
10F113AB/07		PANDUIT	
DATASET FILE NAME			
10F113AB_DC/07B		MATERIAL :	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		SEE NOTES	
.x ± .03 [.8] .xxx ± .005 [.127]		DRAWING NUMBER:	
.xx ± .01 [.25] ANGLES ± 5 °		10F113AB-DC	
		THIRD ANGLE PROJECTION	
DRAWN BY	DATE	CHK	SCALE
SAT	10-01-12	TMSE	NONE
SHT 1 OF 3		SIZE A	


07B	05-28-19	SAT	DWW	EJH	B. ADDED P/N FC29N-24-LAAS & FC29N-24-LAAF.	10F113AB-DC			
07A	10-31-17	SAT	JGD	EJH	A. ADDED P/N FC2WA-24-10AS & FC2WA-24-10AF.	10F113AB-DC			
R	10-10-12	SAT	TMSE		RELEASED TO PRODUCTION	10F113AB-DC			
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN			

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

24 FIBER DUPLEX LC CASSETTE - MODIFIED METHOD A, PAIR FLIPPED	
PART NUMBER	DESCRIPTION
FC2Z0-24-10AF	24 FIBER 50/125um OM4 OPTIMIZED
FC2ZN-24-10AF	24 FIBER 50/125um OM4
FC2X0-24-10AF	24 FIBER 50/125um OM3 OPTIMIZED
FC2XN-24-10AF	24 FIBER 50/125um OM3
FC25N-24-10AF	24 FIBER 50/125um OM2
FC26N-24-10AF	24 FIBER 62.5/125um OM1
FC29N-24-10AF	24 FIBER 9/125um OS1/OS2
FC2SA-24-10AF	24 FIBER 50/125um OM4+, SIGNATURE CORE
FC2WA-24-10AF	24 FIBER 50/125um OM5+, SIGNATURE CORE
FC29N-24-LAAF	24 FIBER OS2 LC/APC, STANDARD LOSS

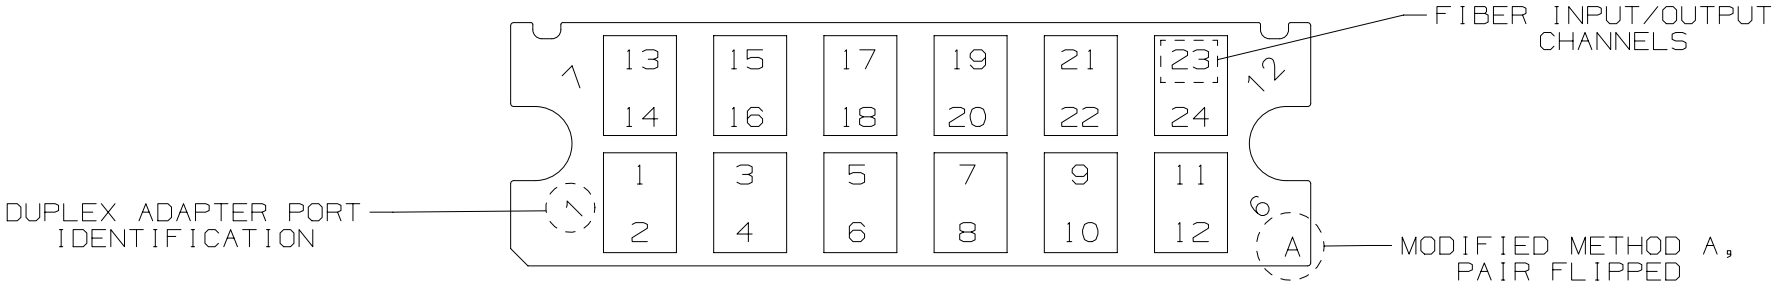

MODIFIED METHOD A, PAIR FLIPPED - FIBER LAYOUT

								TITLE 24 FIBER DUPLEX LC CASSETTE MODIFIED METHOD A, PAIR FLIPPED CUSTOMER DRAWING				
								ITEM REVISION NAME 10F113AB/07				
								DATASET FILE NAME 10F113AB_DC/07B				
								UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .03 [.8] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °			MATERIAL: SEE NOTES SHEET 1	
								 THIRD ANGLE PROJECTION			DRAWING NUMBER: 10F113AB-DC	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY SAT	DATE 10-01-12	CHK TMSE	SCALE NONE	SHT 3 OF 3	SIZE A