

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER**	PANEL THICKNESS	A ± 0.013 (0.33)	B ± 0.015 (0.38)	C +0.020 (0.51) -0.015 (0.38)	D +0.020 (0.51) -0.015 (0.38)	E REF.	F ± TOL.	G REF.	R REF.	JIS PANEL DESIGNATION
GE_62F-A-C	0.036 - 0.062 (0.91 - 1.57)	0.031 (0.79)	0.070 (1.78)	0.130 (3.30)	0.030 (0.76)	0.131 (3.33)	0.105 +0.005 (0.13) (2.67) -0.025 (0.64)	0.150 (3.81)	0.015 - 0.055 (0.38 - 1.40)	012
GE_99F-A-C	0.062 - 0.099 (1.57 - 2.51)	0.049 (1.24)	0.108 (2.74)	0.155 (3.94)	0.030 (0.76)	0.169 (4.29)	0.125 +0.005 (0.13) (3.18) -0.025 (0.64)	0.150 (3.81)	0.015 - 0.055 (0.38 - 1.40)	016
GE_144F-A-C	0.099 - 0.144 (2.51 - 3.66)	0.080 (2.03)	0.152 (3.86)	0.192 (4.88)	0.030 (0.76)	0.213 (5.41)	0.160 +0.005 (0.13) (4.06) -0.035 (0.89)	0.150 (3.81)	0.015 - 0.055 (0.38 - 1.40)	024, 032

NOTES:

- * 1. DIM'S F & G APPLY ONLY TO SLOTTED GROMMET EDGING.
- ** 2. PART NO. EXAMPLE:

GE

S

62

F - A - C

O

WEATHER RESISTANT BLACK

100 FOOT ROLL


A=ADHESIVE

F=POLYETHYLENE

MAX. PANEL THICKNESS

S=SOLID
E=SLOTTED

GROMMET EDGING
3. SEE CURRENT PRICE SHEET FOR PART NO. SUFFIX DESIGNATION FOR PACKAGE SIZE.
4. COLOR: a) NATURAL
b) -O AFTER PART NO. DENOTES WEATHER RESISTANT BLACK
5. THE ADHESIVE WIDTH IS TO STRETCH COMPLETELY ACROSS THE PRODUCT PROFILE.
6. SLOTTED WALL STYLE IS RECOMMENDED FOR INSIDE PANEL CUT OUTS.
SOLID WALL STYLE IS RECOMMENDED FOR STRAIGHT, OUTSIDE EDGES.
7. REELS MAY CONTAIN A MAXIMUM OF THREE SPLICES
8. DIMENSIONS IN PARENTHESES ARE IN METRIC.

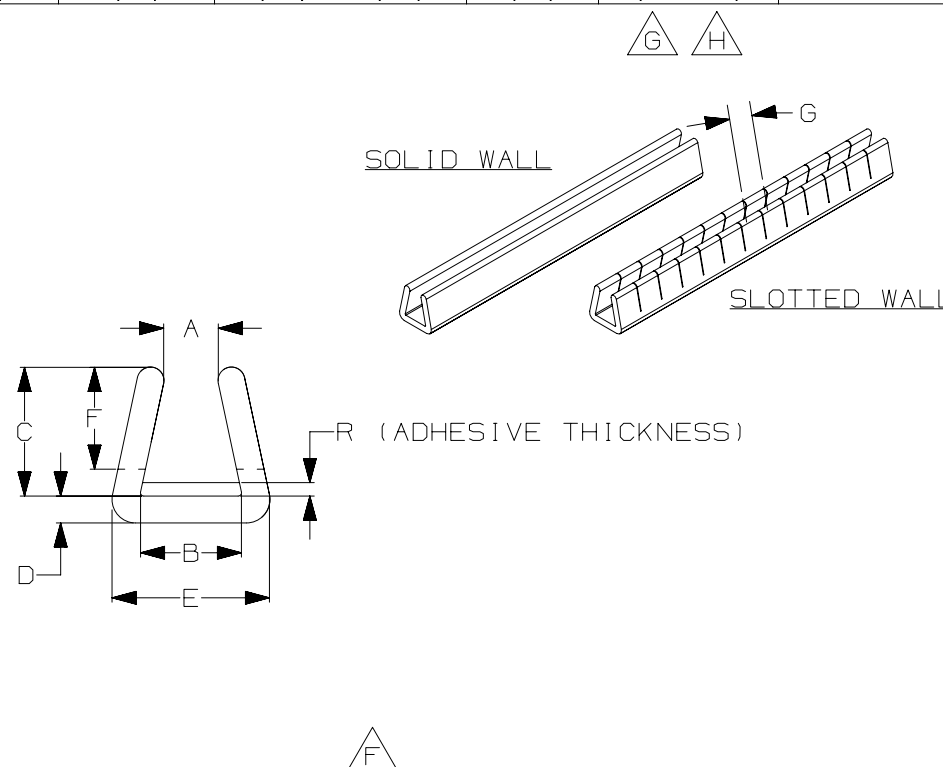

							TITLE							
							ADHESIVE LINED GROMMET EDGING							
							CUSTOMER DRAWING							
							ITEM REVISION NAME			PANDUIT				
							G03597DN/03							
							DATASET FILE NAME							
							G03597DN_DC_GB0308BA_11/00B							
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			MATERIAL:				
							.X ± .XX ±			SEE NOTE #2				
							.XXX ± ANGLES ±			DRAWING NUMBER:				
							—			THIRD ANGLE PROJECTION				
							DRAWN BY		DATE		CHK	SCALE		SIZE
							CPE		02-17-93			N.T.S.	SHT 1 OF 1	A
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN								
11	06.20.16	BDK	MRJS	RGR0	H. DIM. R FOR GE_62F-A-C, GE_99F-A-C AND GE_144F-A-C RESPECTIVELY WERE 0.030 (0.76), 0.027 (0.69) AND 0.036 (0.91)	GB0308BA								
10	01-21-15	JBN	MRJS	RGR0	G. REVISED DIM. "R" F. REMOVED PRIOR REVISIONS MARKS- SEE PREVIOUS DRWG	GB0308BA								