



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

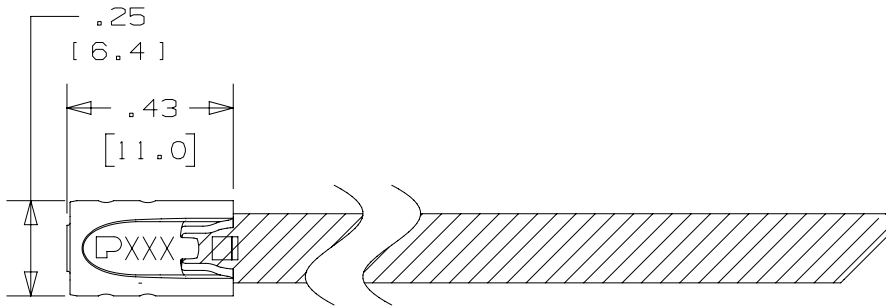


PANDUIT PART NO.	MAX BUNDLE DIAMETER	PACKAGE QTY	LENGTH ('L") +/- .3" [7]
IMLTFC38S-C6L	1.5" [38]	100	6.2" [158]
IMLTFC51S-C6L	2" [51]	100	7.9" [201]
IMLTFC64S-C6L	2.5" [64]	100	9.4" [233]
IMLTFC86S-C6L	3.4" [86]	100	12.2" [310]
IMLTFC102S-C6L	4" [102]	100	14.3" [362]
IMLTFC137S-C6L	5.4" [137]	100	18.2" [462]
IMLTFC152S-C6L	6" [152]	100	20.5" [521]
IMLTFC203S-C6L	8" [203]	100	26.8" [679]

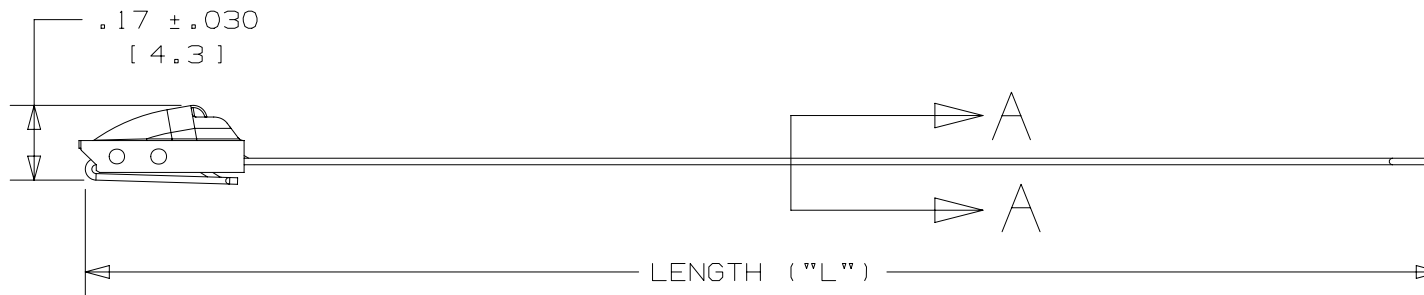

NOTES:

- 1.) APPLICATION TOOLS - GS4MT,PPTMT,ST2MT,HTMT
- 2.) MINIMUM LOOP TENSILE STRENGTH - 100 LBS. (445 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
- 3.) BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
- 4.) TOLERANCES:
 - .XXX = ±.010 [.25]
 - .XX = ±.02 [.5]
 - .X = ±.03 [.8]
 - ANGLES = ±2°
- 5.) MATERIAL: 316L STAINLESS STEEL
- 6.) COATING - EPOXY POLYESTER

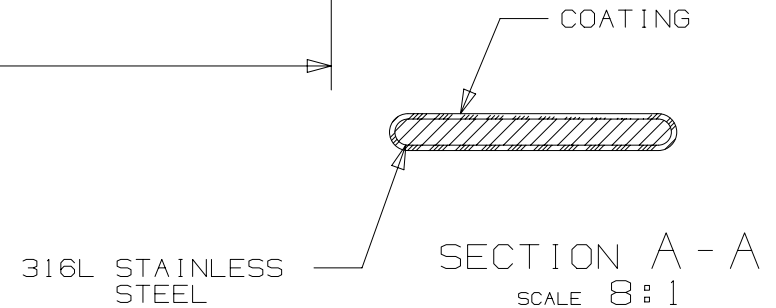

316L STAINLESS STEEL

SECTION A - A
SCALE 8:1

- 1.) APPLICATION TOOLS - GS4MT,PPTMT,ST2MT,HTMT
2.) MINIMUM LOOP TENSILE STRENGTH - 100 LBS. (445 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
3.) BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4.) TOLERANCES:
.XXX = ±.010 [.25]
.XX = ±.02 [.5]
.X = ±.03 [.8]
ANGLES = ±2°
5.) MATERIAL: 316L STAINLESS STEEL
6.) COATING - EPOXY POLYESTER

TITLE		IMLT STANDARD FULLY COATED SINGLE LOOP ASSEMBLY 316L STAINLESS STEEL	
CONTROL DRAWING			
ITEM REVISION NAME		15L355BF/00	
DATASET FILE NAME		15L355BF_DC/00	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.x ± .1 [2.54] .xxx ± .005 [.127]		316L STAINLESS STEEL	
.xx ± .01 [.25] ANGLES ± 5 °		DRAWING NUMBER:	
THIRD ANGLE PROJECTION		15L355BF_DC	
DRAWN BY	DATE	CHK	SCALE
JSUN	3-7-16	JSUN	2:1
SHT 1 OF 1		A	