
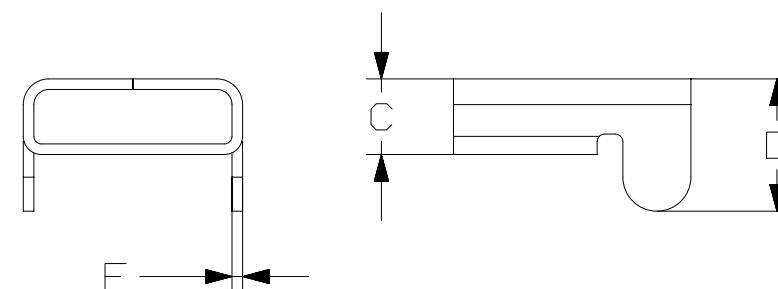



NOTES :

1. MATERIAL: 316L STAINLESS STEEL
2. FOR USE WITH CORRESPONDING PANDUIT
IMSXXXT35-QR6L UNCOATED OR
IMSPXXXT35-QR6L* COATED CUSTOM LENGTH
STRAPPING, WHERE * CAN BE COLOR CODE,
I.E. B FOR BLUE.
3. DIMENSIONS ARE IN MM.
4. APPLICATION TOOL: PANDUIT BT75SDT.
5. PACKAGE QUANTITY: 100 PCS PER BAG.

PANDUIT PART NO.	A	B	C	D	E
IMSBL9.5-C6L	12.0	14.6	4.3	8.5	0.70
IMSBL12-C6L	14.5	16.1	4.5	9.9	0.70
IMSBL16-C6L	18.5	20.1	5.1	11.9	0.70



										TITLE				Drawing for L Type Buckles			
										CUSTOMER DRAWING							
										ITEM REVISION NAME				15L322BF/01		PANDUIT	
										DATASET FILE NAME				15L322BF_DC/01			
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: MM				MATERIAL:			
										.x ± .25 .xx ± .13				ANGLES ± 1 °			
														THIRD ANGLE PROJECTION			
										DRAWN BY				DATE		CHK	
										SCALE				SHT 1 OF 1			
										ECN				SIZE A4			
REV	DATE	BY	CHK	APR	DESCRIPTION												
01	06/15/2016	JSUN	SKB	RGR0	DIMENSION CHANGES AND ADD COLOR CODE FOR IMSP STRIP					15L322BF_DC/01							
00	9/15	JSUN	SKB	RGR0	DRAWING RELEASED					15L322BF_DC/00							