

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	650 STR/FLEX
Wire Type	Stranded Copper: Locomotive
Wire Strip Length	3.0 in.
Stud Size	1/2 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90 ° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	BLACK
Panduit Die Index No. on Barrel	P 106
Alternate Industry Die Index No. () on Barrel	(24)




CERTIFIED



LISTED

Wire Connector

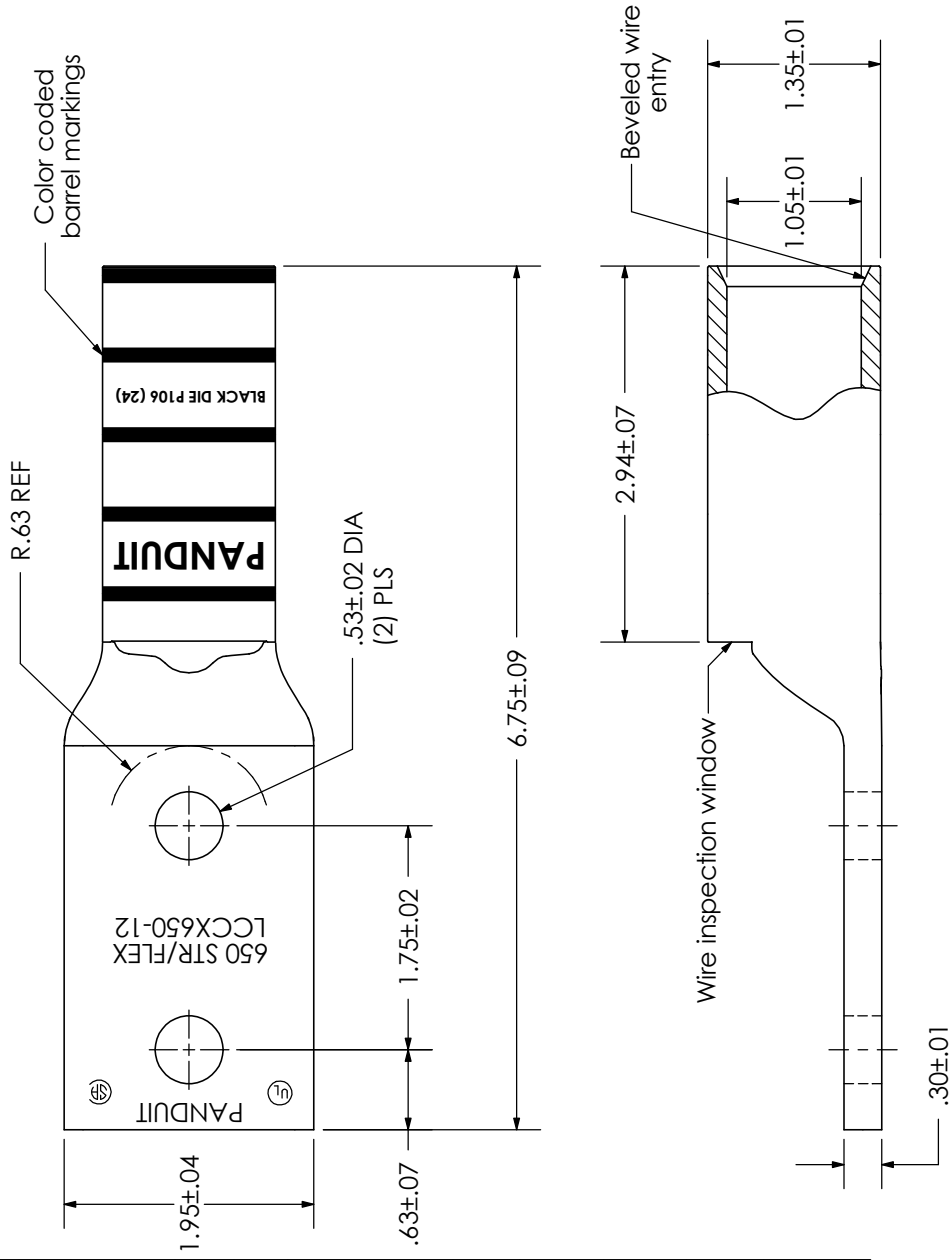

				PANDUIT CORP. TINLEY PARK, ILLINOIS			
				LCCX650-12-6			
				Copper Lug - Two-Hole, Long Flex Barrel with Window			
REV	DATE	BY	CHK	DESCRIPTION		SCALE	DRAWING NO / CAD FILE
01	4/10	JHNU	JHNU	REVISED DESCRIPTION TO LONG FLEX BARREL		N/A	LCCX650-12-CUST