

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. APPLICATION TOOLS - GS4MT,PPTMT,ST2MT,ST3MT,HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 200 LBS.[889 NEWTONS]
WHEN TESTED ON A 1.5" MANDREL.

3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS
AND ARE SHOWN FOR REFERENCE ONLY


4. TOLERANCES:

- $\triangle C$.XXX = $\pm .010$ [.25]
 .XX = $\pm .02$ [.5]
 .X = $\pm .03$ [.8]

ANGLES = $\pm 2^\circ$

5. MATERIAL: 316 STAINLESS STEEL

PANDUIT PART NO.	MAX BUNDLE DIAMETER	PACKAGE QTY	LENGTH L = $\pm .3$ [7]
MLT1S-CP316	1" [25]	100	5.0" [127]
MLT2S-CP316	2" [51]	100	7.9" [201]
MLT2.7S-CP316	2.7" [69]	100	10.2" [259]
MLT4S-CP316	4" [102]	100	14.3" [362]
MLT6S-CP316	6" [152]	100	20.5" [521]
MLT8S-CP316	8" [203]	100	26.8" [679]
MLT10S-CP316	10" [254]	100	33.0" [838]

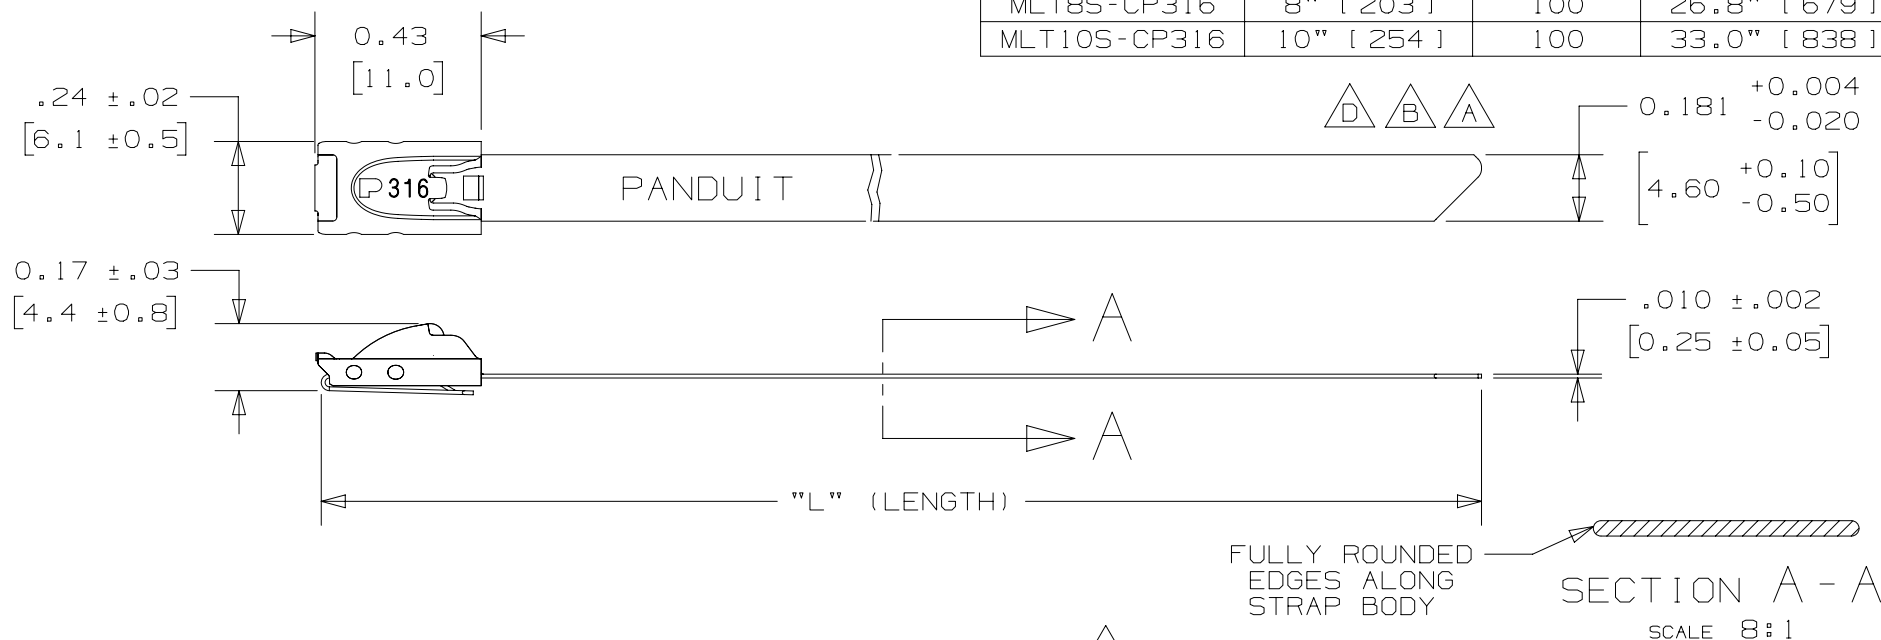

REV						DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE				MATERIAL:			
12						04.14.16	JBN	SKB	RGRO	D. REVISED DIMENSION & ADDED TOLERANCE RANGE	N41120BS_DC	METAL LOCKING TIE STANDARD SERIES 316 STAINLESS STEEL				316 STAINLESS STEEL			
11						04.13.16	BDK	SKB	RGRO	C. REMOVED TOLERANCES FROM TITLE BLOCK; SEE NOTE 4 B. MADE DIMENSION 3 PLACES	N41120BS_DC	CUSTOMER DRAWING				DRAWING NUMBER: N41120BS_DC			
10						10.09.15	BDK	SKB	RGRO	A. ADDED NEW TIP CONFIGURATION	N41120BS_DC	ITEM REVISION NAME N41120BS/12				PANDUIT			
09A						3/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01037	DATASET FILE NAME N41120BS_DC/12A				UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			
08A						2/12	MIM	RGRO	---	NOTE:#3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	----	THIRD ANGLE PROJECTION				DRAWING NUMBER: N41120BS_DC			
REV						DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY JAMB				DATE 2/12			
												CHK DPN				SCALE 2:1			
																SHT 1 OF 1			
																A			