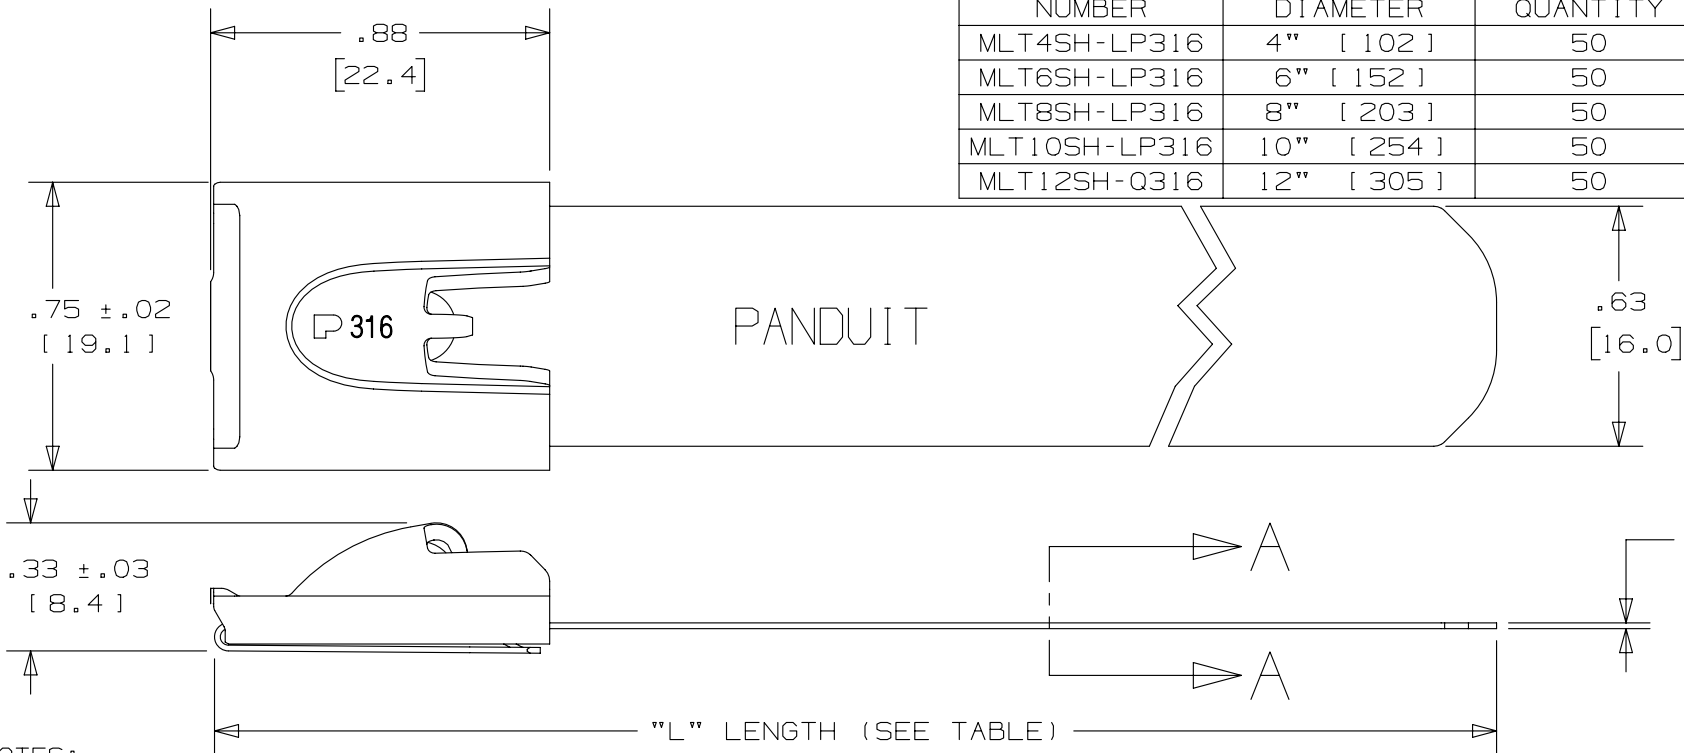


2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	MAX BUNDLE DIAMETER	PACKAGE QUANTITY	"L" LENGTH +/- .3" [7]
MLT4SH-LP316	4" [102]	50	17.1" [434]
MLT6SH-LP316	6" [152]	50	23.4" [594]
MLT8SH-LP316	8" [203]	50	29.7" [754]
MLT10SH-LP316	10" [254]	50	35.9" [912]
MLT12SH-Q316	12" [305]	50	42.2" [1072]





NOTES:

1. APPLICATION TOOLS - RT2HT, RT2HTN & PBTMT
2. MINIMUM LOOP TENSILE STRENGTH - 900 LBS. (4005 NEWTONS) WHEN TESTED ON A 3" MANDREL
3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
.XXX = ±.010 [.25] .XX = ±.02 [.5]
.X = ±.03 [.8] ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL

FULLY ROUNDED
EDGES ALONG
STRAP BODY

SECTION A - A
SCALE: 4x

							TITLE					
05A	02/13	JAMB	SKB	RGRO	UPDATED DRAWING TO NEW PANDUIT GLOBAL TITLE BLOCK WITH PANDUIT LOGO	SSECN01028	METAL LOCKING TIE SUPER HEAVY DUTY 316 STAINLESS STEEL					
					ADDED APPLICATION TOOLS RT2HTN & PBTMT							
04A	02/12	JAMB	MIM	RGRO	NOTE 3: METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----	CUSTOMER DRAWING					
							ITEM REVISION NAME		N41164BS/05			
03A	05/06	JAMB	SKB	----	ORIG FILE SPEC WAS S41164_03. NOTE 1: APPLICATION TOOL RT1HT REPLACED BY RT2HT		DATASET FILE NAME		N41164BS_DC/05A			
03	05/06	JAMB	SKB	----	ADDED PARTS MLT10SH-LP316 & MLT12SH-Q316 TO TABLE	SS00179	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .1 [2.54] .XXX ± .005 [.127] .XX ± .01 [.25] ANGLES ± 5 °  THIRD ANGLE PROJECTION				MATERIAL:	
02	06/05	JAMB	EJD	----	ADDED NEW TIP CONFIGURATION	SS00011					SEE NOTES	
01	08/04	JAMB	EJD	JJB	REMOVED "AISI NO. 5"	11907	 THIRD ANGLE PROJECTION				DRAWING NUMBER:	
											N41164BS_DC	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SIZE	
							JAMB	08/04	DPN	2:1	SHT 1 OF 1	A

2

1