


2

1


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



PANDUIT PART NO	MAX. BUNDLE DIA	PACKAGE QTY	"L" LENGTH ±.3" [7]
MLTFC4SH-LP316	4" [102]	50	17.1" [434]
MLTFC6SH-LP316	6" [152]	50	23.4" [594]
MLTFC8SH-LP316	8" [203]	50	29.7" [754]

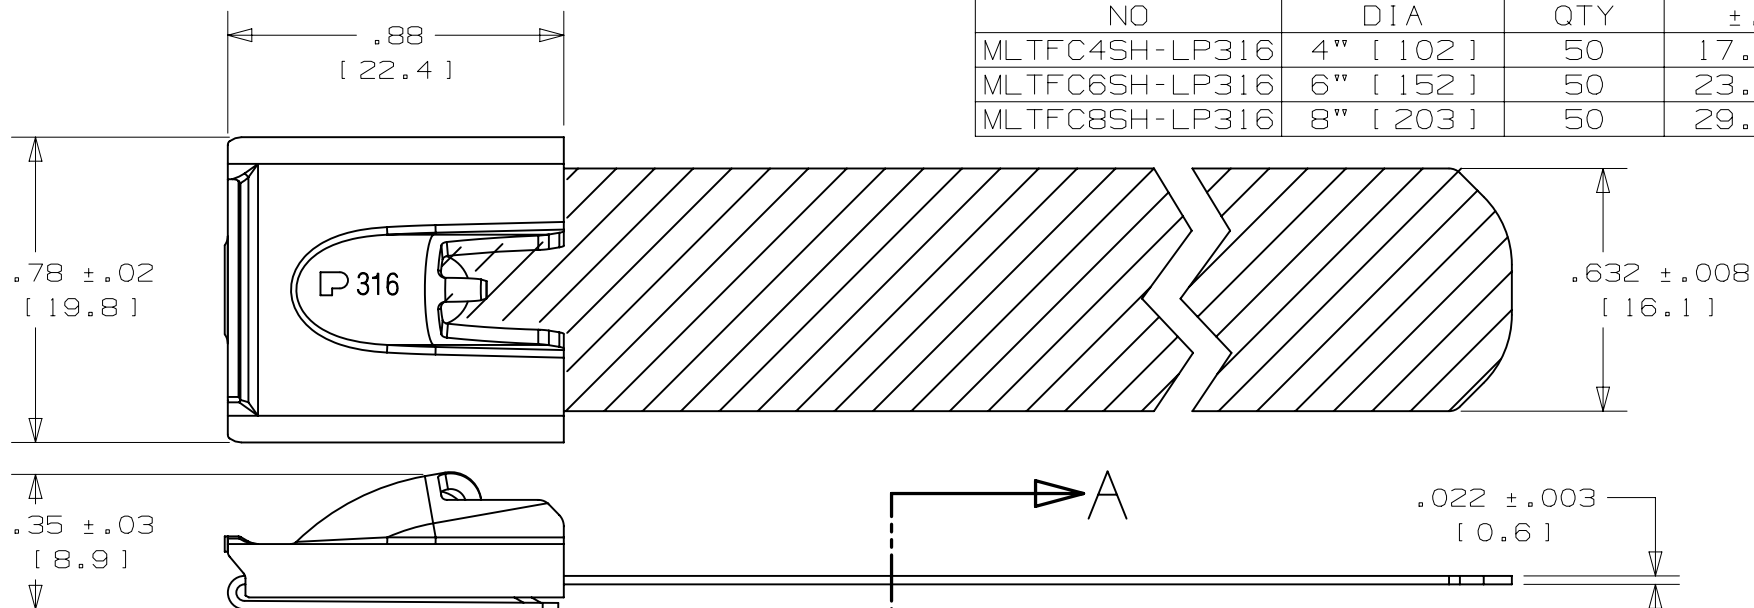

NOTES:

1. APPLICATION TOOLS - PBTMT & RT2HT
2. MINIMUM LOOP TENSILE STRENGTH - 450 LBS. (2002 NEWTONS) WHEN TESTED ON A 3" MANDREL
3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
 .XXX = ±.010 [.25] .XX = ±.02 [.5]
 .X = ±.03 [.8] ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL
6. COATING - POLYESTER
 COATING THICKNESS: .002 MIN./ .005 MAX. PER SIDE

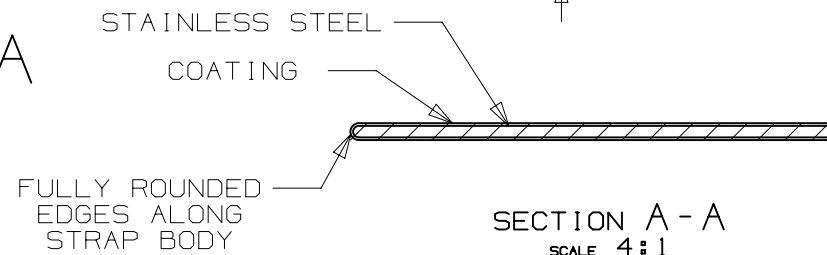

							TITLE				
							METAL LOCKING TIE SUPER HEAVY DUTY FULLY COATED				
							CUSTOMER DRAWING				
							ITEM REVISION NAME		N41201BS/05		
							DATASET FILE NAME		N41201BS_DC/05A		
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:		
05A	11/14	JHNU	SKB	RGB	ADDED PBTMT TO APPLICATION TOOLS	SSECN01165	.x ± .1 [2.54]		.xxx ± .005 [.127]		316 STAINLESS STEEL
04A	4/13	JAMB	MIM	RGR0	UPDATE DRAWING TO MNEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01049	.xx ± .01 [.25]		ANGLES ± 5 °		
03A	2/12	MIM	RGR0	---	NOTE #3 - METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	----			THIRD ANGLE PROJECTION		DRAWING NUMBER:
											N41201BS_DC
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SIZE
							JMMR	2/12	EJD	2:1	A
							SHT 1 OF 1				

2

1