


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

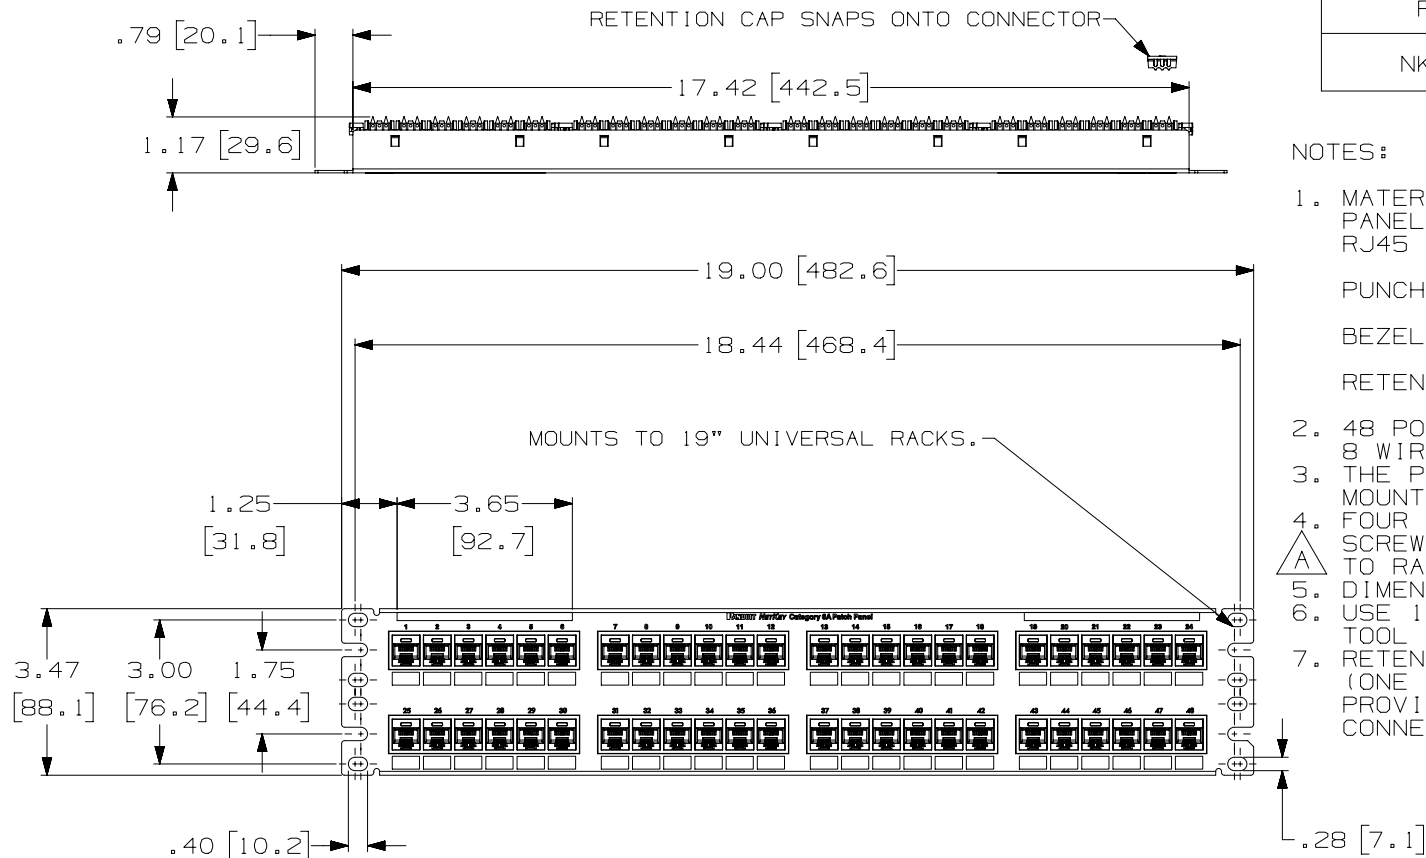

PANDUIT
PART NO.

WEIGHT
(APPOX.)

NK6XPPG48Y

2.2 lb (997.9 g)

NOTES:

- MATERIAL:
PANEL HOUSING: STEEL
RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0
PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
- 48 PORT PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN BRACKETS ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

PART NUMBER

SEE CHART

TITLE

NETKEY CAT6A 48 PORT PATCH PANEL

CUSTOMER DRAWING

ITEM REVISION NAME


M02479RQ/01

DATASET FILE NAME

M02479RQ_DC423/01A

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± .XXX ± .010 [.3]
.XX ± .03 [.8] ANGLES ±



THIRD ANGLE
PROJECTION

MATERIAL:

SEE NOTE 1

DRAWING NUMBER:

02479-423

DRAWN BY

BJN

DATE

2-4-15

CHK

BJN

SCALE

.25 TO 1

SHT 1 OF 1

SIZE

A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
1	9-27-18	BAME	KRKE	MMR	A. REMOVED M6 SCREWS	M09000HW
R	2-4-15	BJN	MDJR	LPH	RELEASED TO PRODUCTION	02479-423