



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

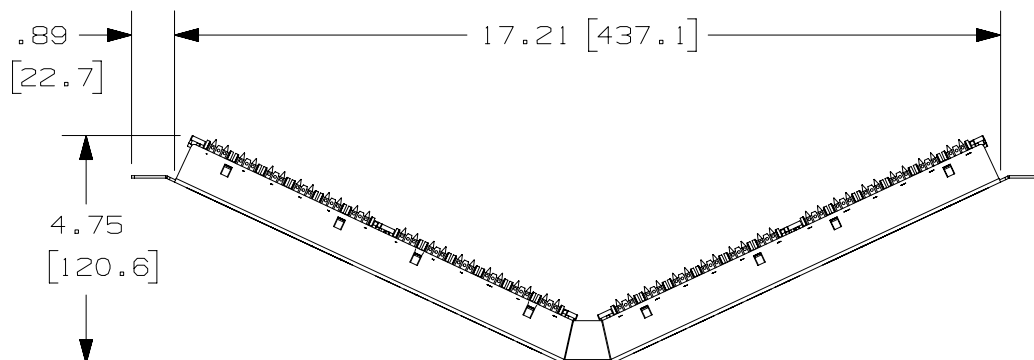

PANDUIT PART NUMBER	WEIGHT
NKA6PPG24Y	1.26 lb (572.73 g)

**NOTES:**

- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
- MATERIAL:  
PANEL HOUSING: STEEL  
RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0  
PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0  
BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B  
RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
- 24 PORT ANGLED PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN BRACKETS ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

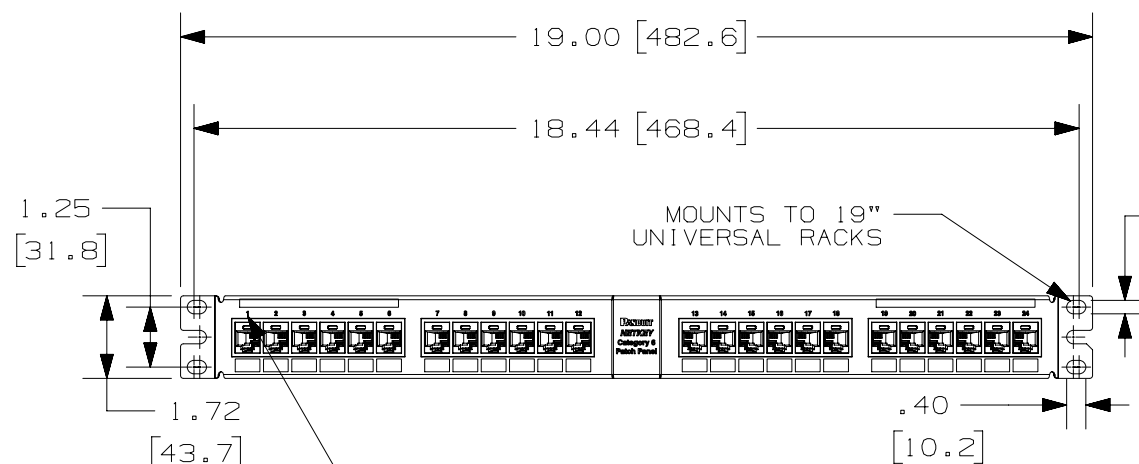

MOUNTS TO 19"  
UNIVERSAL RACKS

CID\*\*-C & CIP\*\*-C, PHONE OR DATA ICON LOCATES HERE. IDENTIFIES INDIVIDUAL PORT. OPTIONAL, NOT SUPPLIED.

PART NUMBER	SEE CHART	PRODUCT SPEC/PKG SPEC	N/A
I.I. NUMBER	N/A	WORK INSTRUCTION	N/A
TITLE			
NETKEY CAT6 24 PORT ANGLED PATCH PANEL			
CUSTOMER DRAWING			
ITEM REVISION NAME	M02088AL/01		
DATASET FILE NAME	M02088AL_DC24/01A		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]			MATERIAL:
.x ± .1 [ 2.54 ] .xxx ± .005 [ .127 ] .xx ± .01 [ .25 ] ANGLES ± 5 °			DRAWING NUMBER:
THIRD ANGLE PROJECTION			02088-42
DRAWN BY	DATE	CHK	SCALE
LZ	1-22-13	MBVE	.25:1
SHT 1 OF 1			SIZE
			A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
2	10-1-18	BAME	KRKE	MMR	A. REMOVED M6 SCREWS	M09000HW
1	10-2-13	BJN	SCAL	JCK	ADDED NEW PANDUIT TITLE BLOCK	02088-42
R	1-23-13	LZ	MBVE	MBVE	RELEASED TO PRODUCTION	02088-42