



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

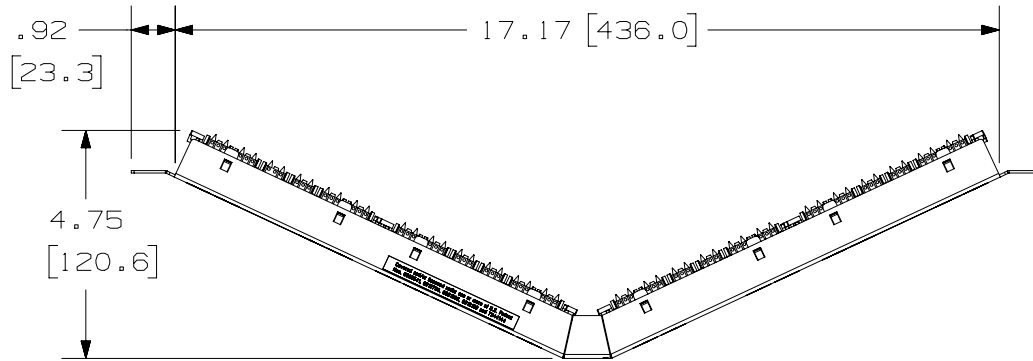

PANDUIT PART NUMBER	WEIGHT
NKA6XPPG48Y	2.36 lb (1070.48 g)

NOTES:


- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
- MATERIAL:
PANEL HOUSING: STEEL
RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0
PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
- 48 PORT ANGLED PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN BRACKETS ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

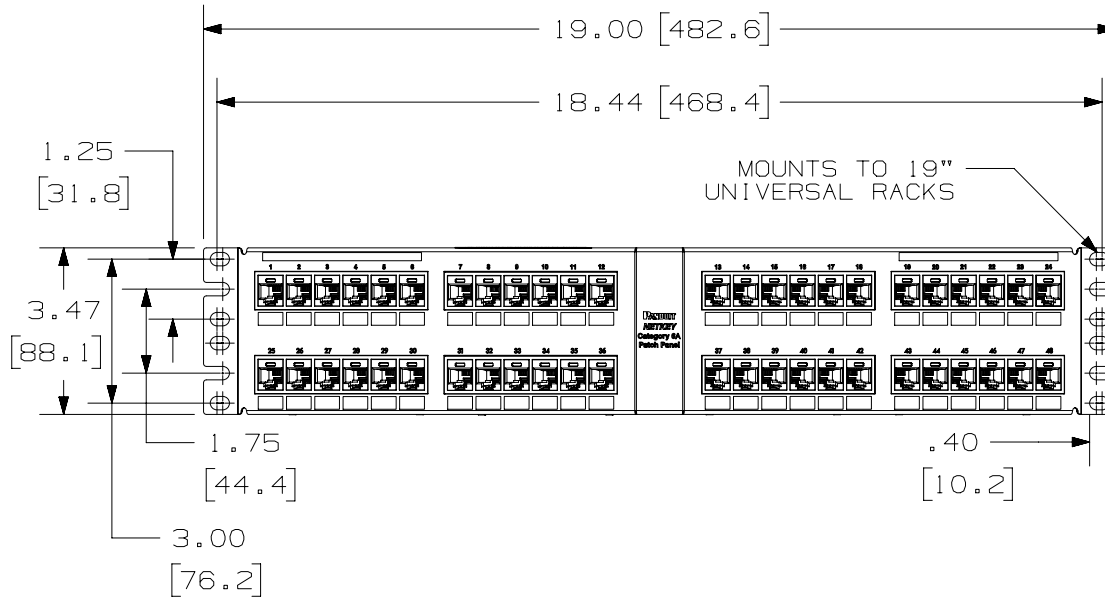

PART NUMBER	SEE CHART	PRODUCT SPEC/PKG SPEC	N/A
I.I. NUMBER	N/A	WORK INSTRUCTION	N/A

TITLE	NETKEY CAT6A 48 PORT ANGLED PATCH PANEL
-------	---

CUSTOMER DRAWING

ITEM REVISION NAME		M02088AP/01		PANDUIT	
DATASET FILE NAME		M02088AP_DC45/01A			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °  THIRD ANGLE PROJECTION				MATERIAL: SEE NOTE 2	
				DRAWING NUMBER: 02088 - 45	
DRAWN BY	DATE	CHK	SCALE	SIZE	
BJN	2-4-15	MDJR	.25:1	SHT 1 OF 1	
				A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
1	10-1-18	BAME	KRKE	MMR	A. REMOVED M6 SCREWS	M09000HW
R	2-5-15	BJN	MDJR	LPH	RELEASED TO PRODUCTION	02088-45