

PANDUIT P/N	WEIGHT
P12B30M	1.1kg

NOTES:

1. IDENTIFICATION:

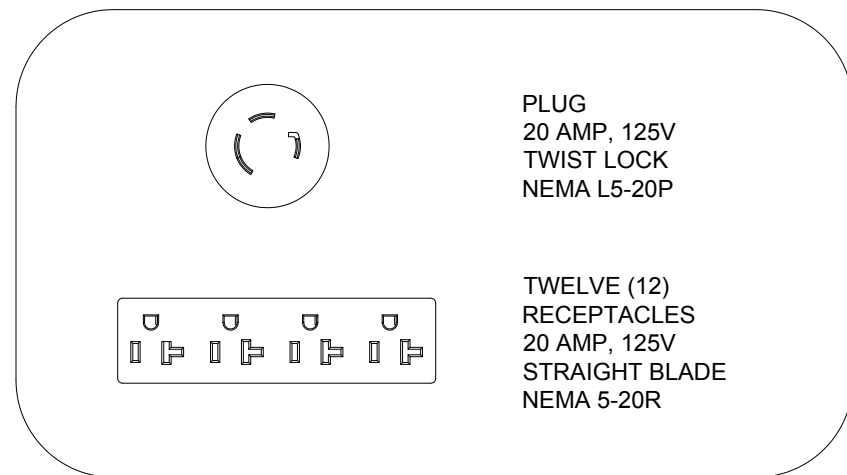
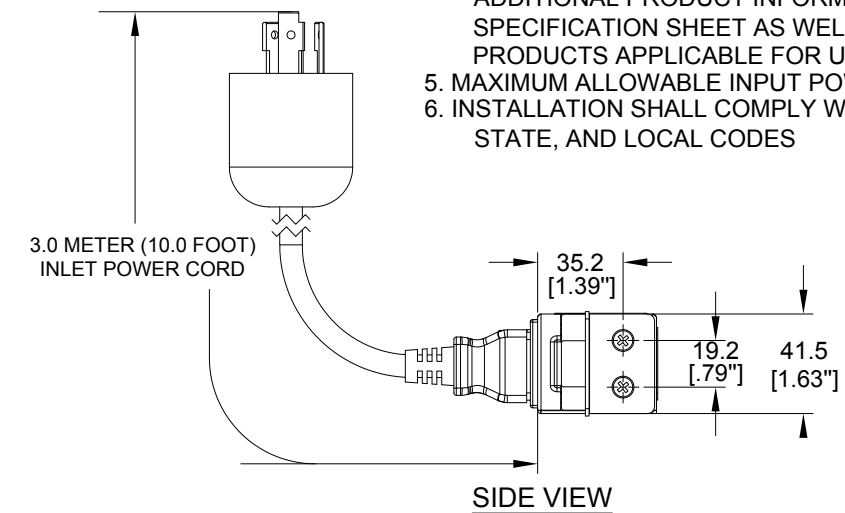
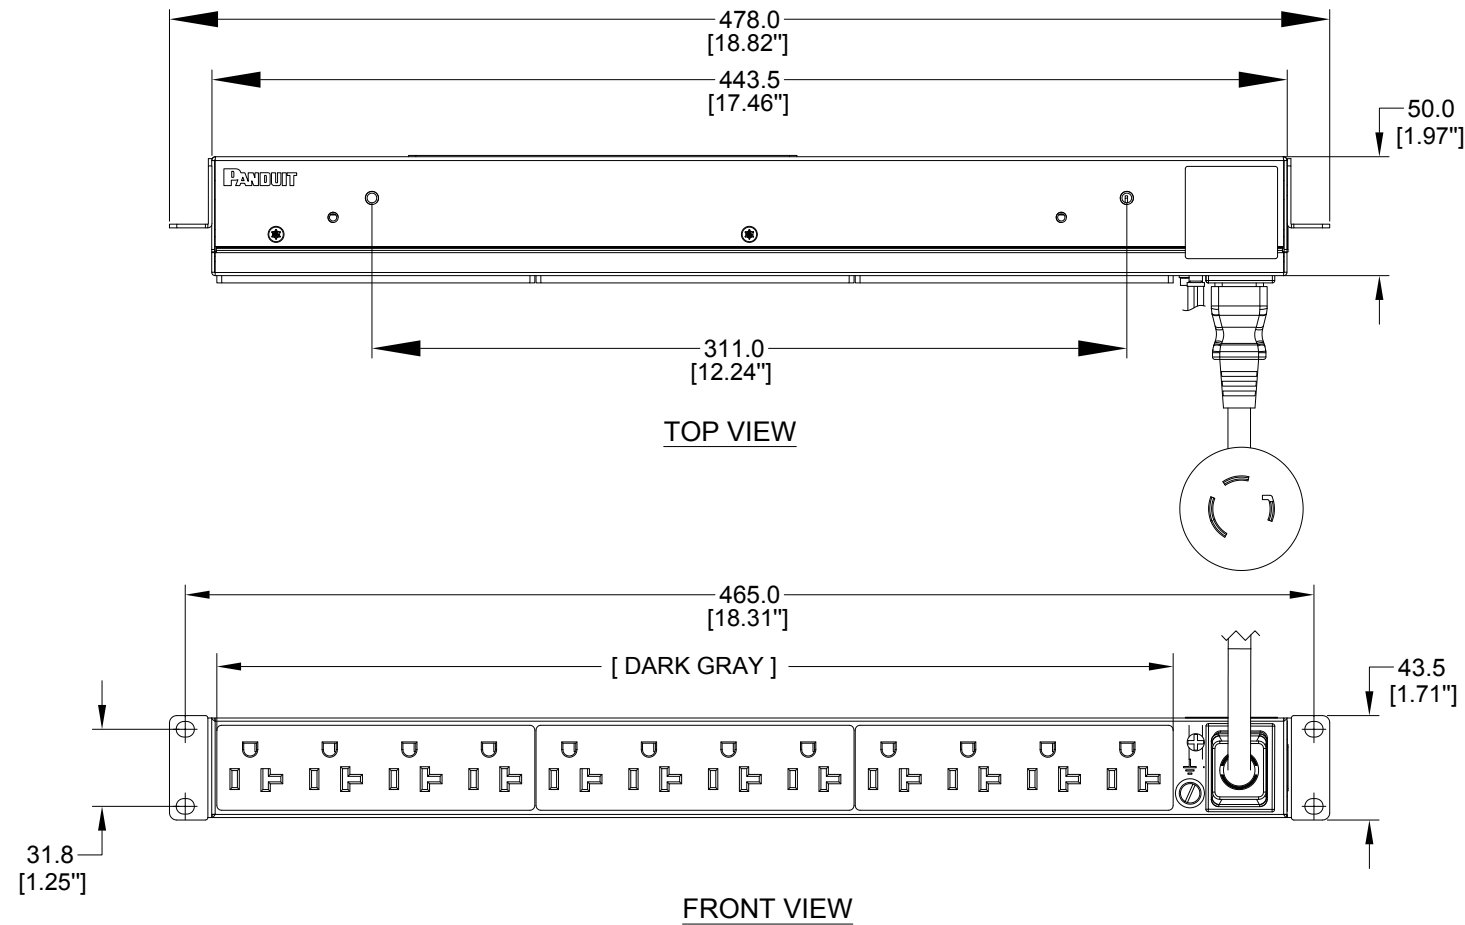
UNIT TYPE:	BASIC
ORIENTATION:	HORIZONTAL, 1U
OUTLET QTY&TYPE:	(12) NEMA 5-20R
BREAKER QTY&TYPE:	N/A
INPUT VOLTAGE:	100-120V
INPUT CURRENT:	20A (16A DERATED)
INPUT PHASE:	SINGLE-PHASE
RATED POWER:	1.9kVA
INPUT PLUG:	NEMA L5-20P
INPUT CORD LENGTH:	3m [10']



2. ACCESSORIES:

POCKET GUIDE
QTY: (4) M6 X 12 PAN HEAD MACHINE SCREWS
QTY: (4) M6 CAGED NUT
QTY: (2) BUTTONS
QTY: (2) M4 FINE THREAD SCREWS

- ### 3. RoHS COMPLIANT

4. VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
5. MAXIMUM ALLOWABLE INPUT POWER = 1.9 kW
6. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES



						DELIVERY						
						TITLE		BASIC SERIES PDU P12B30M CUSTOMER DRAWING				
						ITEM REVISION NAME						
						DATASHEET FILE NAME						
						UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A				
						 THIRD ANGLE PROJECTION		Tolerance(mm) 0.4<200 ±0.5 200<4500 ±1.5 4500<10000 ±2.5 10000<20000 ±4.0				
01A	06/28/2017	JIANG	MIM	EDM	INITIAL RELEASE	P12B30M	DRAWN BY: DATE		CHK	SCALE	DRAWING NUMBER: P12B30M_DC	SCALE B
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	JIANG	05/24/2017	SEAN	NONE	SHT 1 OF 1	