


PANDUIT P/N	WEIGHT
P16B07M	2.0kg


NOTES:

- IDENTIFICATION:


UNIT TYPE:	BASIC
ORIENTATION:	VERTICAL, HALF
OUTLET QTY&TYPE:	(16) 5-20R
BREAKER QTY&TYPE:	N/A
INPUT VOLTAGE:	100-120VAC
INPUT CURRENT:	20A (16A DERATED)
INPUT PHASE:	SINGLE-PHASE
RATED POWER:	1.9kVA
INPUT PLUG:	NEMA 5-20P
INPUT CORD LENGTH:	3m [10']
- ACCESSORIES:
 - POCKET GUIDE
- RoHS COMPLIANT
- VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- MAXIMUM ALLOWABLE INPUT POWER = 1.9kW
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

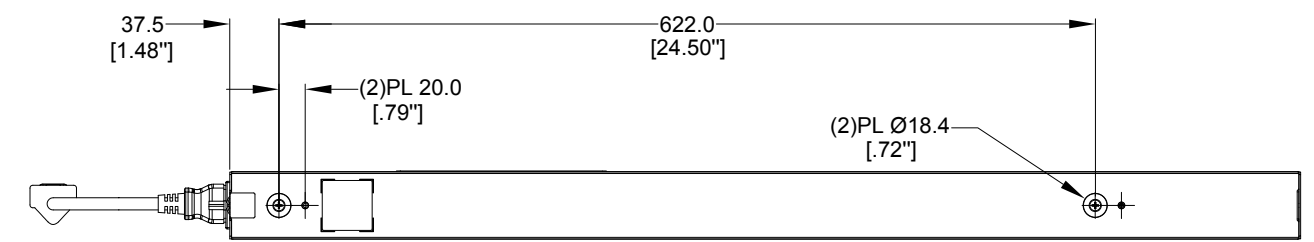


REAR VIEW

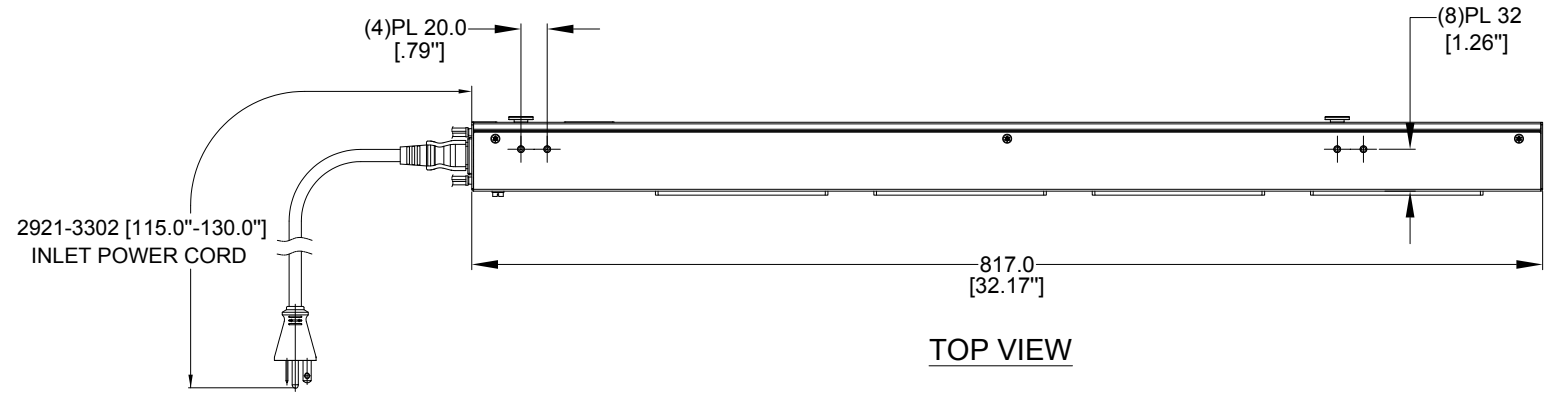


TOP VIEW

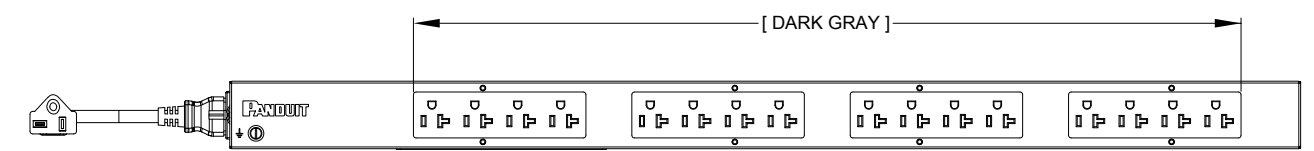


FRONT VIEW

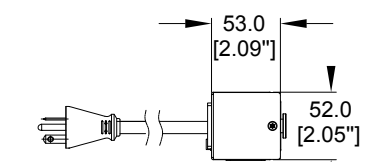

SIDE VIEW



PLUG
20 AMP, 125V
STRAIGHT BLADE
NEMA 5-20P



SIXTEEN (16)
RECEPTACLES
20 AMP, 125V
STRAIGHT BLADE
NEMA 5-20R

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01B	08/21/2017	HANSON	MIM	EDM	REVISED TOLERANCES	P16B07M
01A	06/28/2017	HANSON	MIM	EDM	INITIAL RELEASE	P16B07M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE BASIC SERIES PDU P16B07M CUSTOMER DRAWING		
ITEM REVISION NAME		PANDUIT
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A
Tolerance(mm) 04<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER: P16B07M_DC
THIRD ANGLE PROJECTION	DRAWN BY DATE Hanson 05/24/2017	SCALE NONE
	CHK SEAN	SHT 1 OF 1
		SCALE B