


B

A


B

A


PANDUIT P/N	WEIGHT
P16D22M	2.0kg

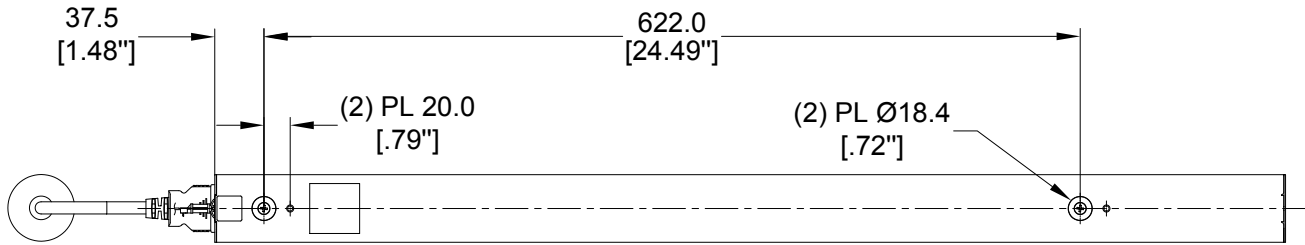


REAR VIEW

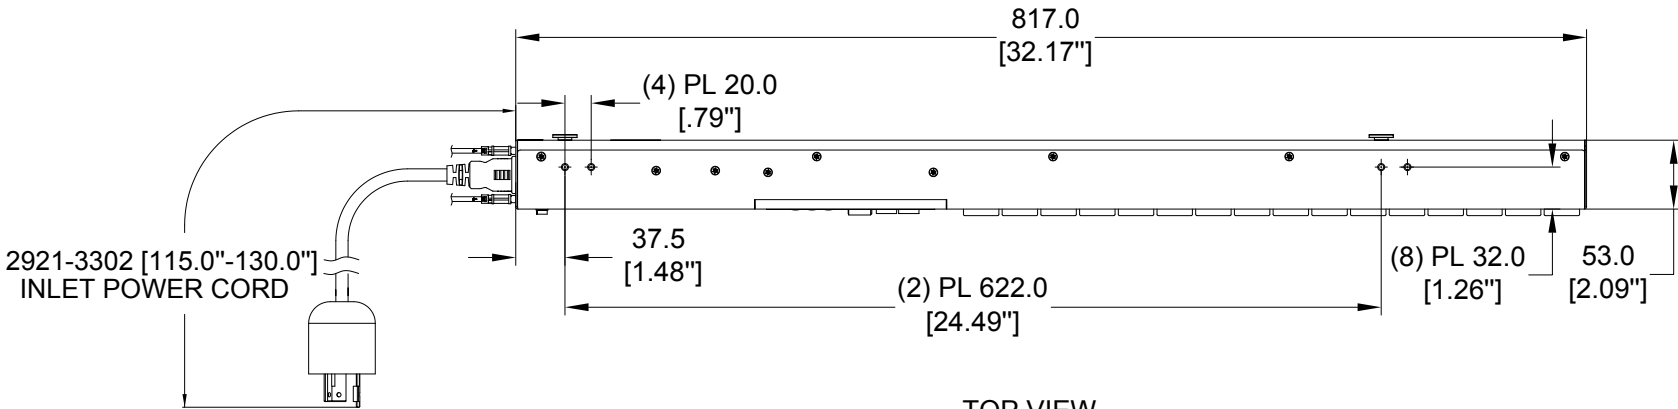

TOP VIEW

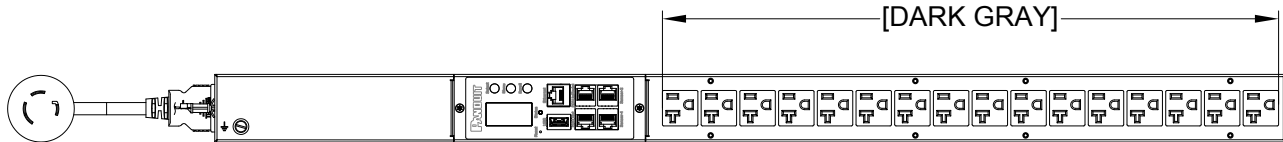

FRONT VIEW

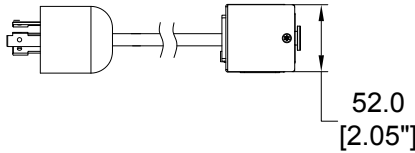


SIDE VIEW


NOTES:

1. IDENTIFICATION:
- UNIT TYPE:
ORIENTATION:
OUTLET QTY&TYPE:
BREAKER QTY&TYPE:
INPUT VOLTAGE:
INPUT CURRENT:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
INPUT CORD LENGTH:

MONITORED INPUT
VERTICAL, HALF
(16) 5-20R
N/A
100-120VAC
20A (16A DERATED)
SINGLE-PHASE
1.9kVA
NEMA L5-20P
3m [10']
2. ACCESSORIES:
POCKET GUIDE
3. RoHS COMPLIANT
4. VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
5. MAXIMUM ALLOWABLE INPUT POWER = 1.9 kW
6. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

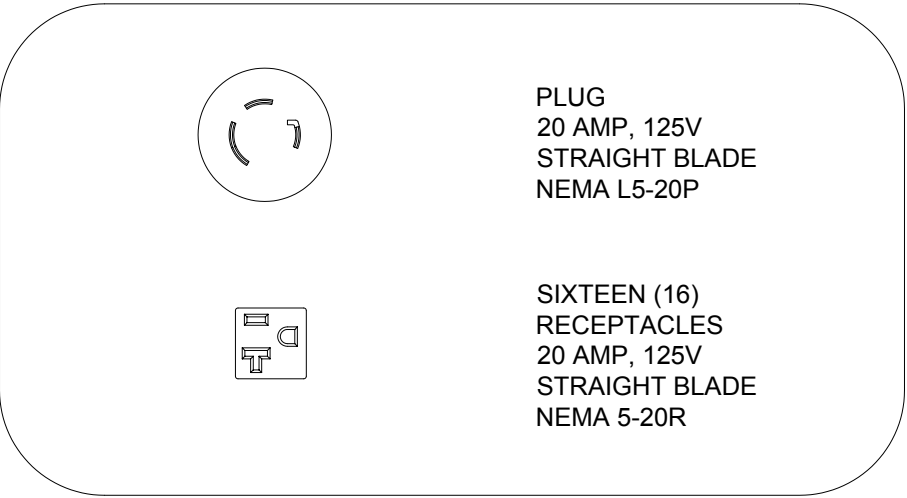

01A	07/27/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P16D22M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY				SIGN	
				DATE	
				PRINT	
TITLE					
INTELLIGENT SERIES PDU P16D22M CUSTOMER DRAWING					
ITEM REVISION NAME:				PANDUIT	
DATASHEET FILE NAME:					
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:	
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0				N/A	
THIRD ANGLE PROJECTION				DRAWING NUMBER:	
				P16D22M_DC	
DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SCALE
GEORGE	07/27/2017	SEAN	NONE		B