

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P24G01M-XXYZ	SEE SHEET 2

SPECIFICATION:

1. STANDARD:	UNIT TYPE:	MONITORED & SWITCHED PER OUTLET
	ORIENTATION:	VERTICAL, 0U FULL
	OUTLET QTY&TYPE:	(20) C13, (4) C19
	INPUT VOLTAGE:	200-240VAC
	INPUT CURRENT:	30A (24A DERATED)
	BREAKER QTY&TYPE:	(2) 20AMP, DOUBLE-POLE
	INPUT PHASE:	SINGLE-PHASE
	RATED POWER:	5.0kVA
	INPUT PLUG:	NEMA L6-30P
	INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
	REGULATORY STANDARD:	RoHS COMPLIANT


2. ADDITIONAL:
NONE
3. ACCESSORIES:
(1) QUICK-START GUIDE

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES].
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES.
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL.
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION


IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: **P24G01M-XX Y Z**

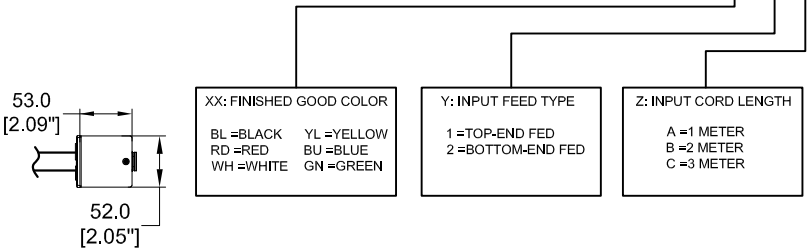


BOTTOM VIEW


WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P24G01M-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME:		PANDUIT	
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A	
THIRD ANGLE PROJECTION		DRAWING NUMBER: P24G01M_DC	
DRAWN BY GEORGE	DATE 10/10/2017	CHK SEAN	SCALE NONE
SHT 1 OF 2		SCALE B	

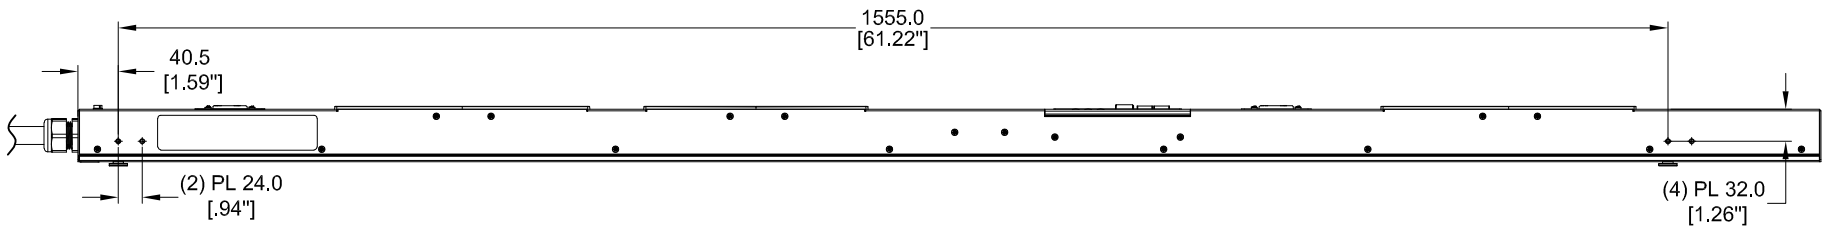


LEFT VIEW

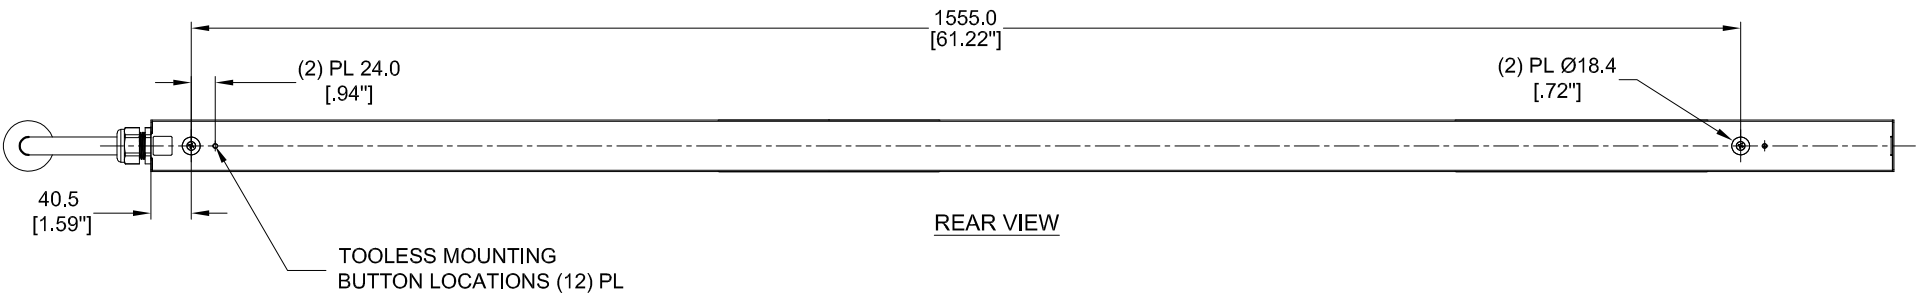

REAR VIEW

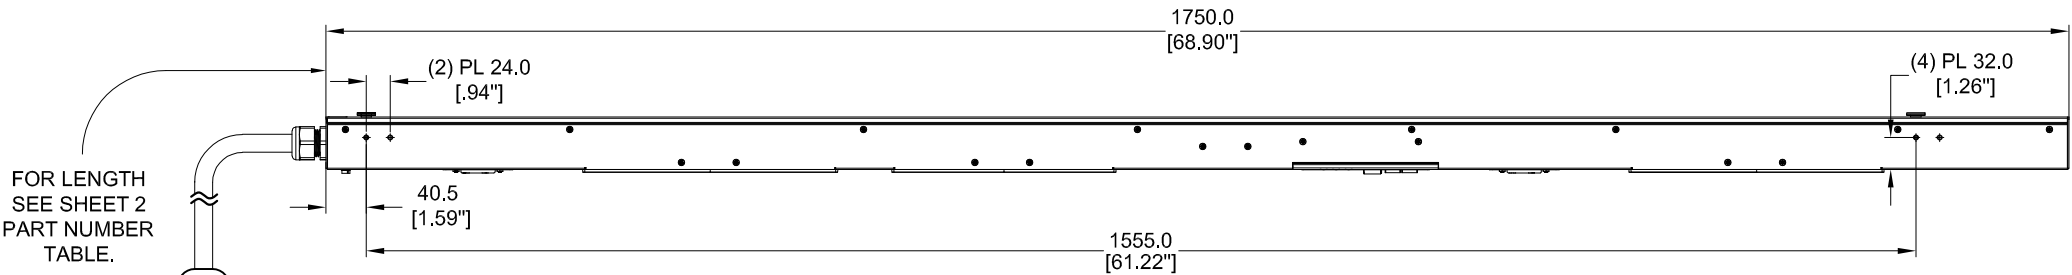


RIGHT VIEW

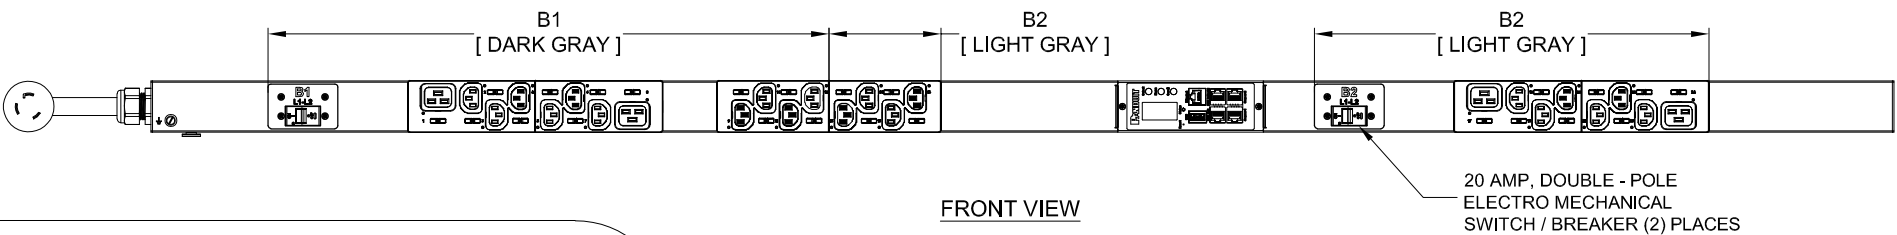

FRONT VIEW

PLUG/RECEPTACLE BLOCK



PLUG
NEMA L6-30P, 2P 3W
30A, 250V MAX RATED INPUT
24A DERATED



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT




RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION "DE-CODER"	P24G01M
01A	10/10/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P24G01M

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P24G01M	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[*+10"/-5"]	10.1kg
P24G01M-BL1A	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	9.3kg
P24G01M-BL1B	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	9.7kg
P24G01M-RD1A	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	9.3kg
P24G01M-RD1B	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	9.7kg
P24G01M-RD1C	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[*+10"/-5"]	10.1kg
P24G01M-WH1A	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	9.3kg
P24G01M-WH1B	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	9.7kg
P24G01M-WH1C	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[*+10"/-5"]	10.1kg
P24G01M-YL1A	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	9.3kg
P24G01M-YL1B	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	9.7kg
P24G01M-YL1C	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[*+10"/-5"]	10.1kg
P24G01M-BU1A	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	9.3kg
P24G01M-BU1B	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	9.7kg
P24G01M-BU1C	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[*+10"/-5"]	10.1kg
P24G01M-GN1A	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	9.3kg
P24G01M-GN1B	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	9.7kg
P24G01M-GN1C	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[*+10"/-5"]	10.1kg
P24G01M-BL2A	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	9.3kg
P24G01M-BL2B	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	9.7kg
P24G01M-BL2C	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[*+10"/-5"]	10.1kg
P24G01M-RD2A	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	9.3kg
P24G01M-RD2B	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	9.7kg
P24G01M-RD2C	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[*+10"/-5"]	10.1kg
P24G01M-WH2A	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	9.3kg
P24G01M-WH2B	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	9.7kg
P24G01M-WH2C	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[*+10"/-5"]	10.1kg
P24G01M-YL2A	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	9.3kg
P24G01M-YL2B	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	9.7kg
P24G01M-YL2C	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[*+10"/-5"]	10.1kg
P24G01M-BU2A	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	9.3kg
P24G01M-BU2B	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	9.7kg
P24G01M-BU2C	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[*+10"/-5"]	10.1kg
P24G01M-GN2A	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[*+3.5"/-1.75"]	9.3kg
P24G01M-GN2B	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[*+7"/-3.5"]	9.7kg
P24G01M-GN2C	VERTICAL,(20) C13,(4) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[*+10"/-5"]	10.1kg

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL, PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN				
		DATE				
		PRINT				
TITLE INTELLIGENT SERIES PDU P24G01M-XXYZ CUSTOMER DRAWING						
ITEM REVISION NAME:						
DATASHEET FILE NAME:						
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]						
		Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0				
		MATERIAL/COLOR: N/A				
		DRAWING NUMBER: P24G01M_DC				
DRAWN BY GEORGE	DATE 10/10/2017	CHK SEAN	SCALE NONE	SHT 2 OF 2		SCALE B

02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO I NCLUDE CONFIGURABLE OPTION 'DE-CODER'	P24G01M
01A	10/10/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P24G01M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN