



B

A


B

A

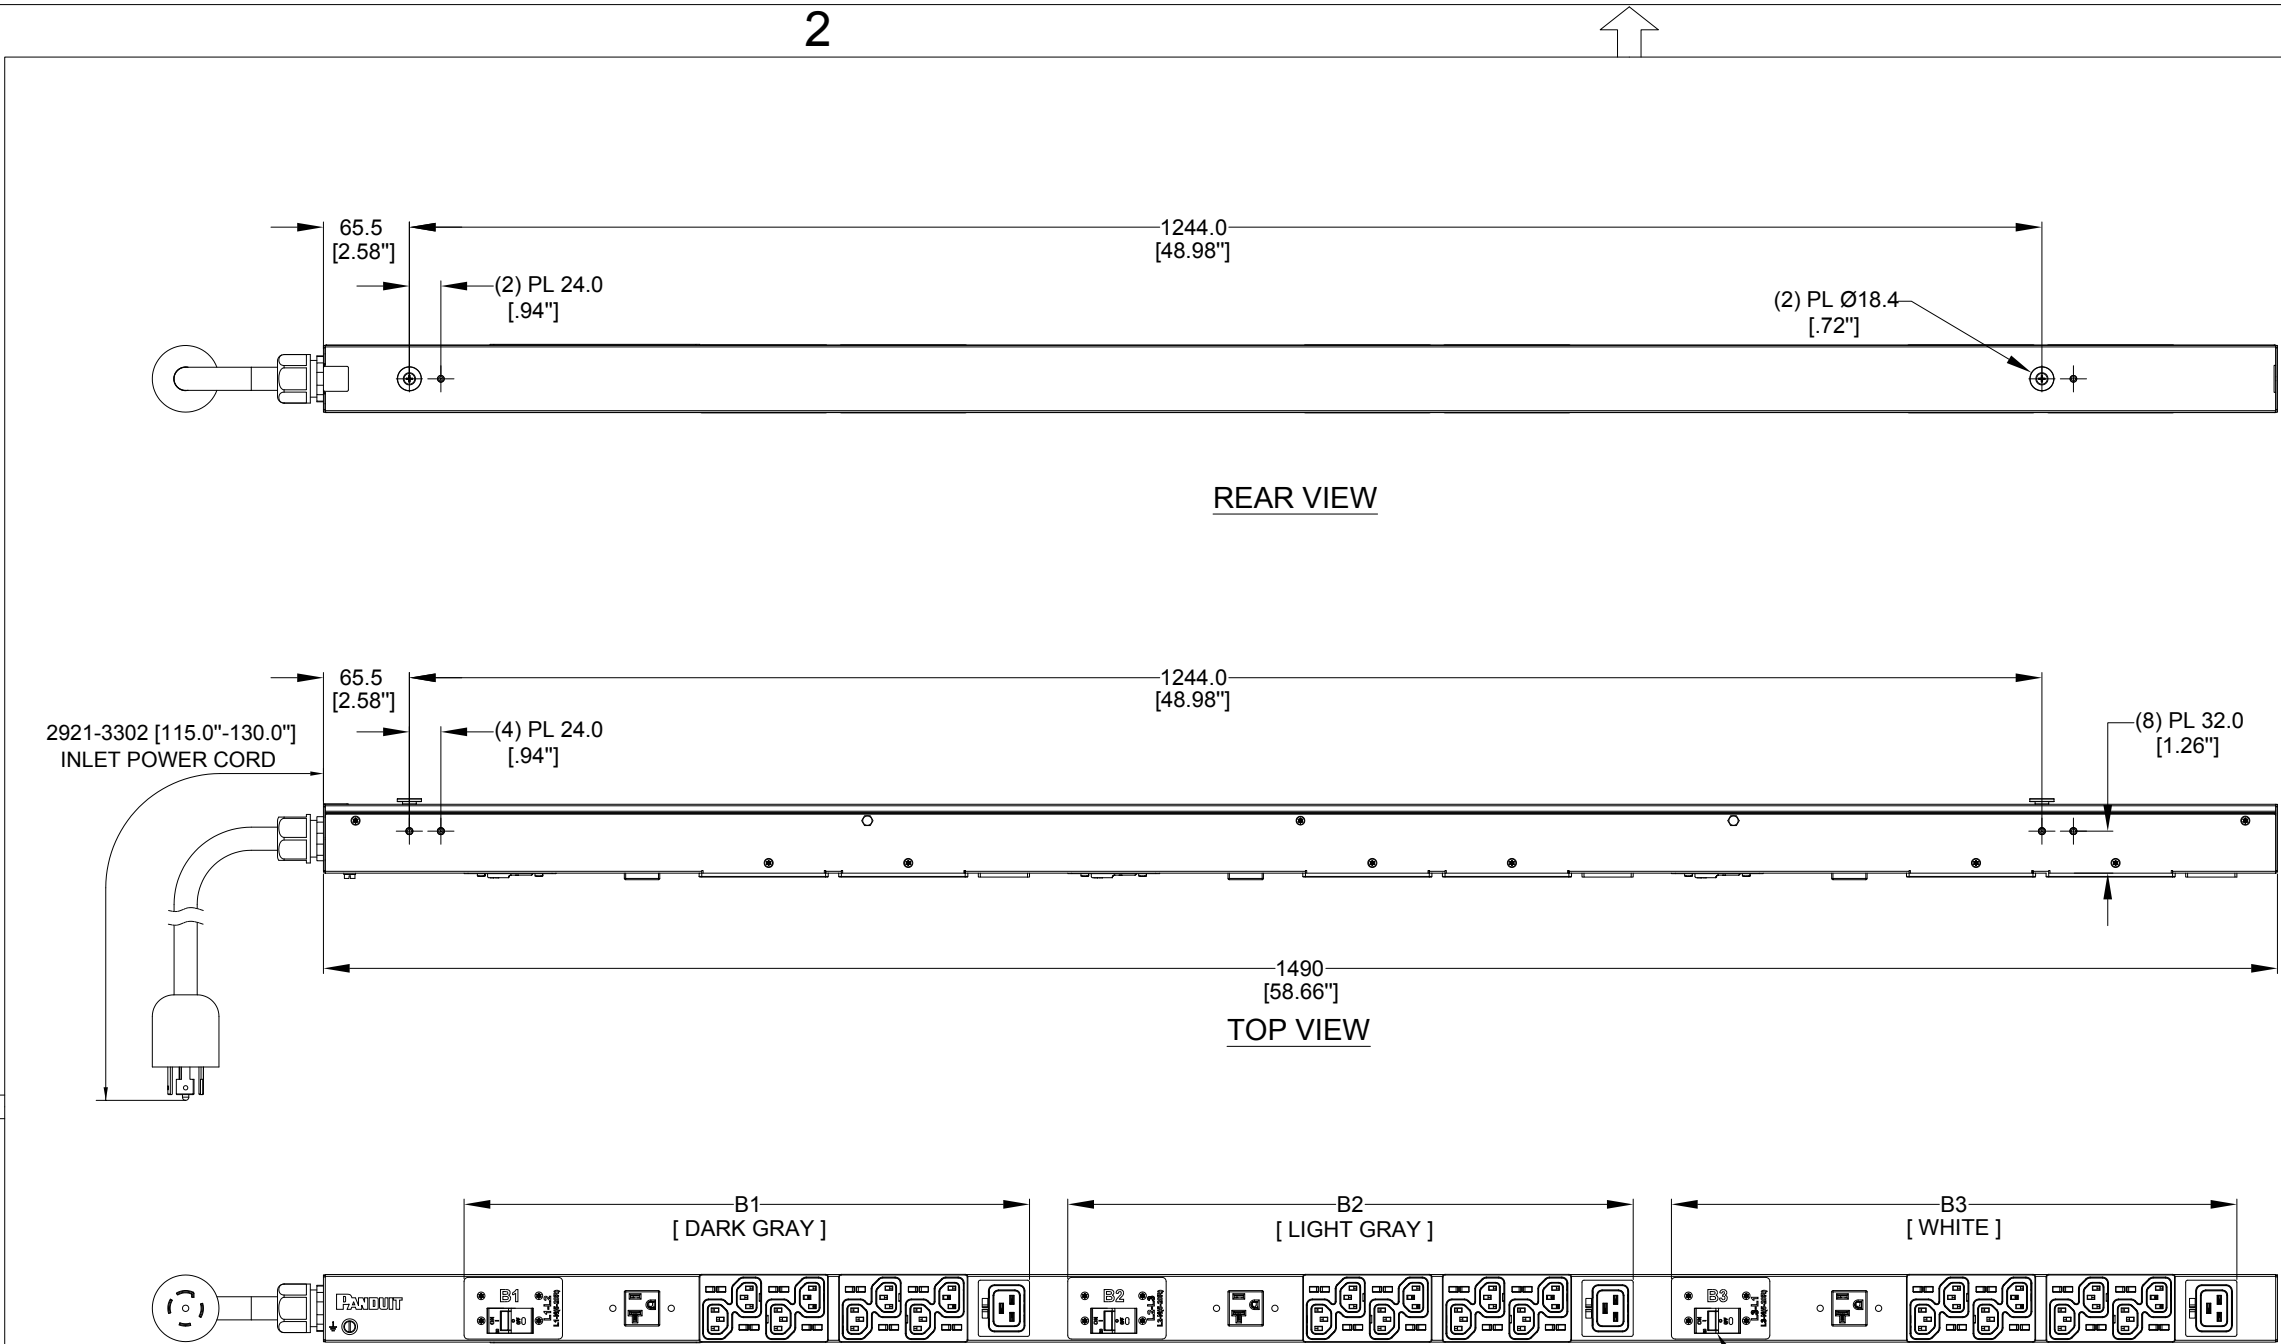





PLUG
30 AMP, 120/208V x 3~ WYE
TWIST LOCK
NEMA L21-30P



THREE(3)
RECEPTACLES
16 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C19



THREE(3)
RECEPTACLES
20 AMP, 125V
STRAIGHT BLADE
NEMA 5-20R



TWENTY-FOUR (24)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C13

01B	08/21/2017	DI.ZHAI	MIM	EDM	REVISED TOLERANCES	P30B25M
01A	06/28/2017	DI.ZHAI	MIM	EDM	INITIAL RELEASE	P30B25M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN _____
DATE _____
PRINT _____

TITLE
BASIC SERIES PDU
P30B25M
CUSTOMER DRAWING

ITEM REVISION NAME _____
DATASHEET FILE NAME: _____

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)
04<50 ±0.5
50<250 ±1.0
250<500 ±1.5
500<1000 ±2.5
1000<2000 ±4.0

THIRD ANGLE PROJECTION

MATERIAL/COLOR:
N/A

DRAWING NUMBER:
P30B25M_DC

DRAWN BY: DI.ZHAI | DATE: 05/24/2017 | CHK: SEAN | SCALE: NONE

SHT 1 OF 1 | SCALE: B

- NOTES:
- IDENTIFICATION:
UNIT TYPE: BASIC
ORIENTATION: VERTICAL, MID
OUTLET QTY&TYPE: (24)C13, (3)C19, (3)5-20R
BREAKER QTY&TYPE: (3) 20A,DOUBLE-POLE
INPUT VOLTAGE: 100-120/200-240VAC, WYE
INPUT CURRENT: 30A (24A DERATED)
INPUT PHASE: THREE-PHASE WYE
RATED POWER: 8.6kVA
INPUT PLUG: NEMA L21-30P
INPUT CORD LENGTH: 3m [10']
 - ACCESSORIES:
POCKET GUIDE
QTY: (6) 5-20R ZIP TIE
 - RoHS COMPLIANT
 - VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
 - MAXIMUM ALLOWABLE INPUT POWER = 8.6kW
 - INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

1

1

2

2