



2

1


PANDUIT P/N	WEIGHT
P36B26M	5.8kg

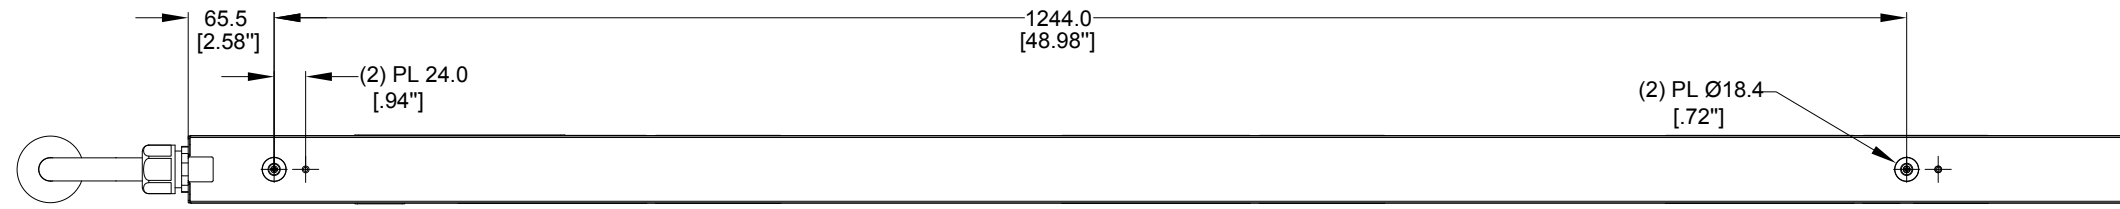

REAR VIEW

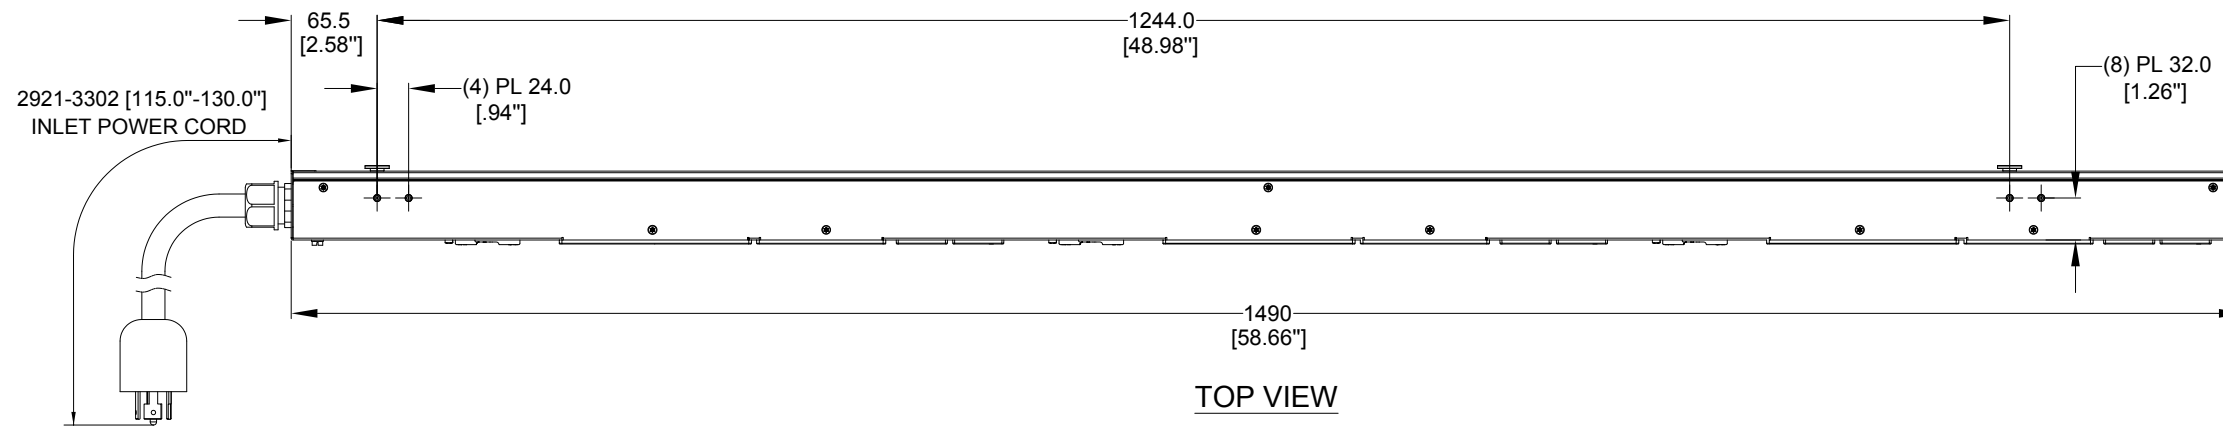


TOP VIEW

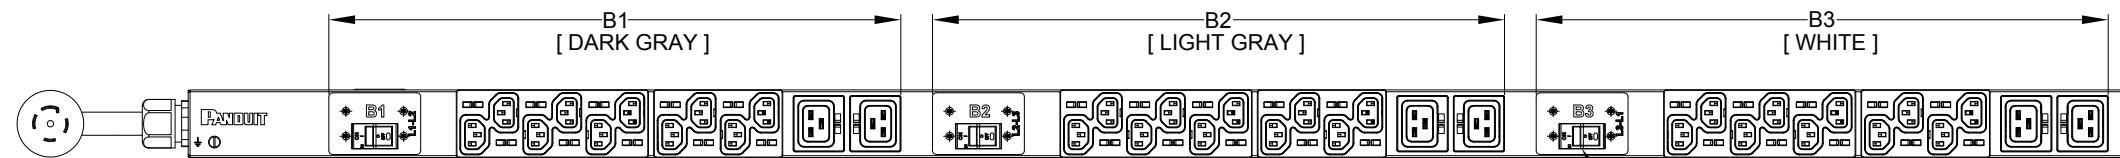

FRONT VIEW

20 A, DOUBLE - POLE ELECTRO-MECHANICAL SWITCH / BREAKER (3) PLACES

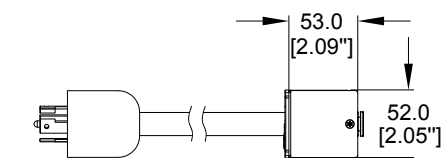

SIDE VIEW

NOTES:

- IDENTIFICATION:
 - UNIT TYPE: BASIC
 - ORIENTATION: VERTICAL, MID
 - OUTLET QTY&TYPE: (30)C13, (6)C19
 - BREAKER QTY&TYPE: (3) 20A,DOUBLE-POLE
 - INPUT VOLTAGE: 100-120/200-240VAC, WYE
 - INPUT CURRENT: 30A (24A DERATED)
 - INPUT PHASE: THREE-PHASE WYE
 - RATED POWER: 8.6kW
 - INPUT PLUG: NEMA L21-30P
 - INPUT CORD LENGTH: 3m [10']
- ACCESSORIES:
 - POCKET GUIDE
- RoHS COMPLIANT
- VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- MAXIMUM ALLOWABLE INPUT POWER = 8.6kW
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

B

B

A

A

PLUG
30 AMP, 120/208V x 3~ WYE
TWIST LOCK
NEMA L21-30P

SIX (6)
RECEPTACLES
16 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C19

THIRTY (30)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C13

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01B	08/21/2017	DI.ZHAI	MIM	EDM	REVISED TOLERANCES	P36B26M
01A	06/28/2017	DI.ZHAI	MIM	EDM	INITIAL RELEASE	P36B26M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE BASIC SERIES PDU P36B26M CUSTOMER DRAWING		
ITEM REVISION NAME		PANDUIT
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A
Tolerance(mm) 04<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER: P36B26M_DC
THIRD ANGLE PROJECTION	DRAWN BY: DI.ZHAI DATE: 05/24/2017	CHK: SEAN SCALE: NONE
SHT 1 OF 1		SCALE: B

2

1