

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P36D08M-XXYZ	SEE SHEET 2

SPECIFICATION:

1. STANDARD:	
UNIT TYPE:	MONITORED INPUT
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY & TYPE:	(30) C13, (6) C19
INPUT VOLTAGE:	200-240VAC
INPUT CURRENT:	30A (24A DERATED)
BREAKER QTY & TYPE:	(3) 20AMP, DOUBLE-POLE
INPUT PHASE:	THREE-PHASE, DELTA
RATED POWER:	8.6 kVA
INPUT PLUG:	NEMA L15-30P
INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT


2. ADDITIONAL:
NONE
3. ACCESSORIES:
(1) QUICK-START GUIDE

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES] .
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION



IDENTIFICATION


FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P36D08M-XX Y Z

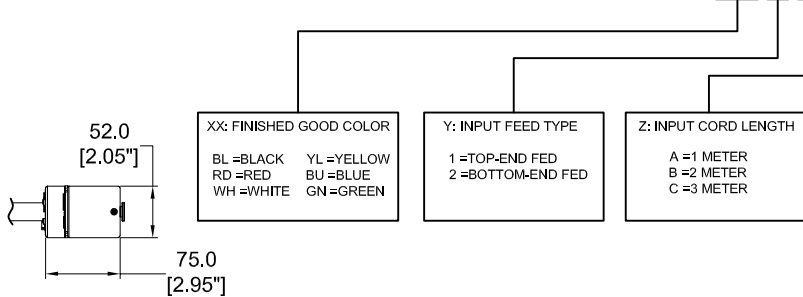


BOTTOM VIEW

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY	SIGN
	DATE
	PRINT


TITLE INTELLIGENT SERIES PDU P36D08M-XXYZ CUSTOMER DRAWING					
ITEM REVISION NAME					
DATASHEET FILE NAME:				 THIRD ANGLE PROJECTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance(mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0					
				MATERIAL/COLOR: N/A	
				DRAWING NUMBER: P36D08M_DC	
DRAWN BY WSJ	DATE 07/17/2017	CHK SEAN	SCALE NONE	SHT 1 OF 2	
				SCALE B	

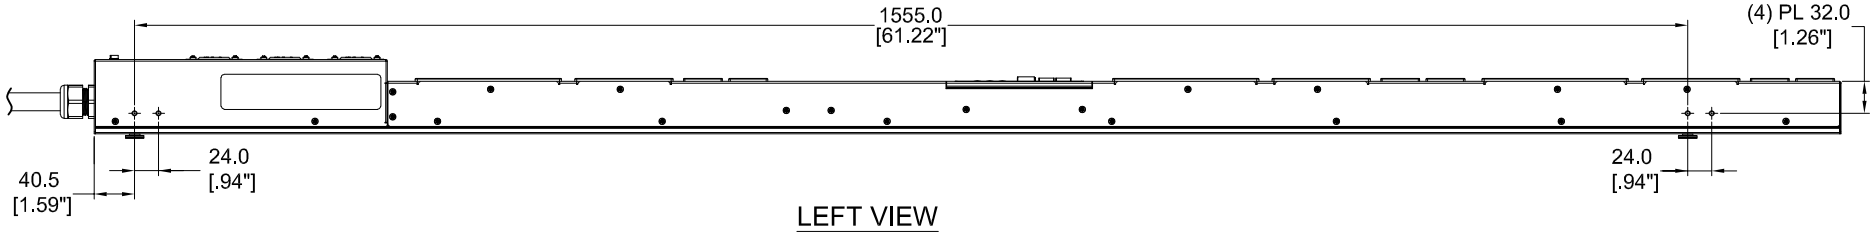


LEFT VIEW

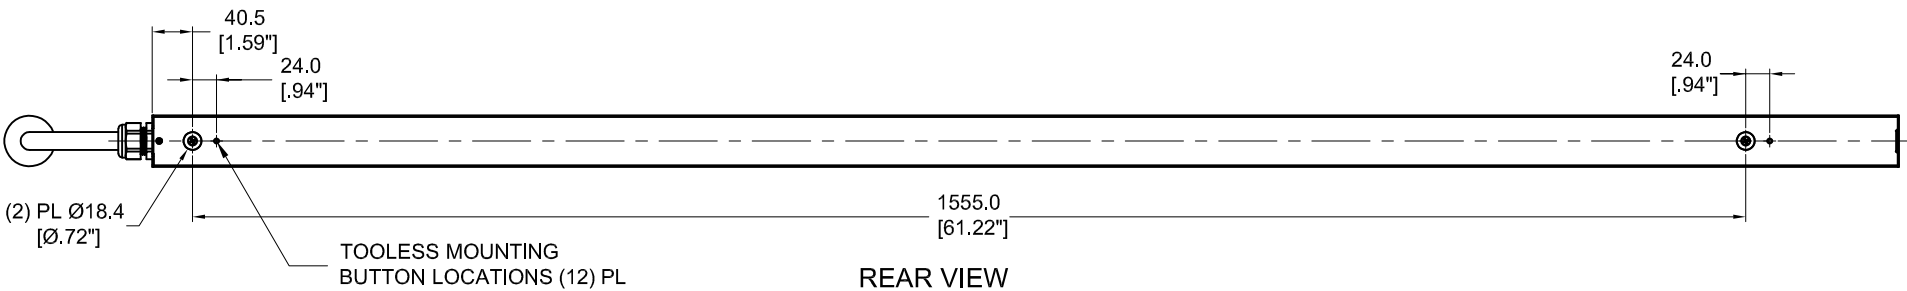

REAR VIEW

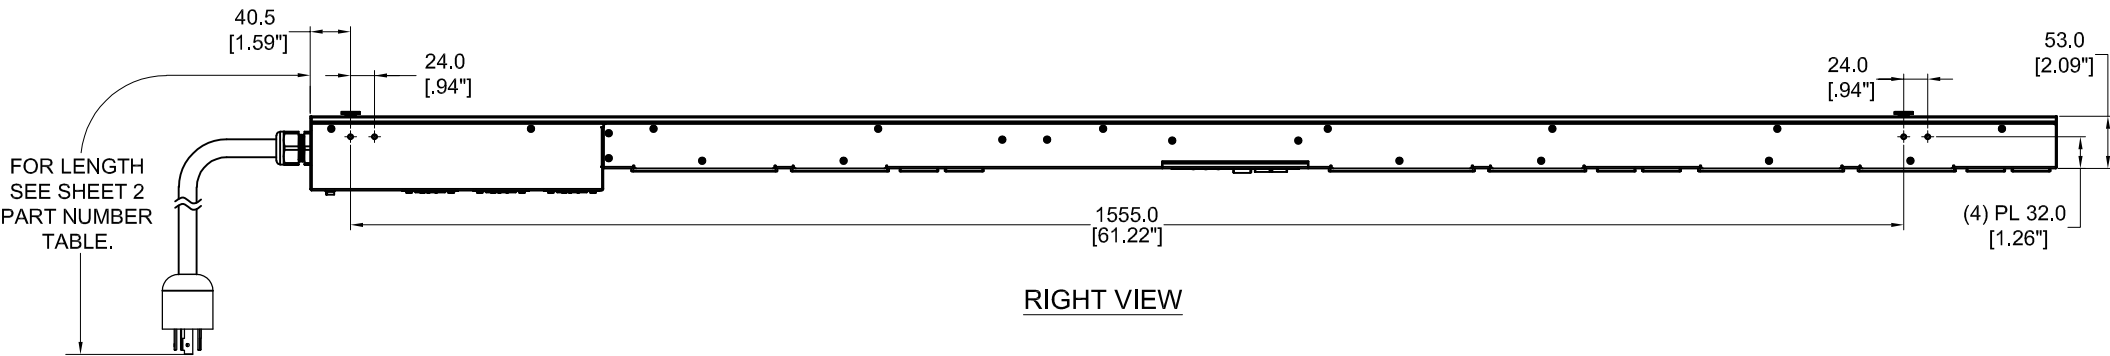

RIGHT VIEW

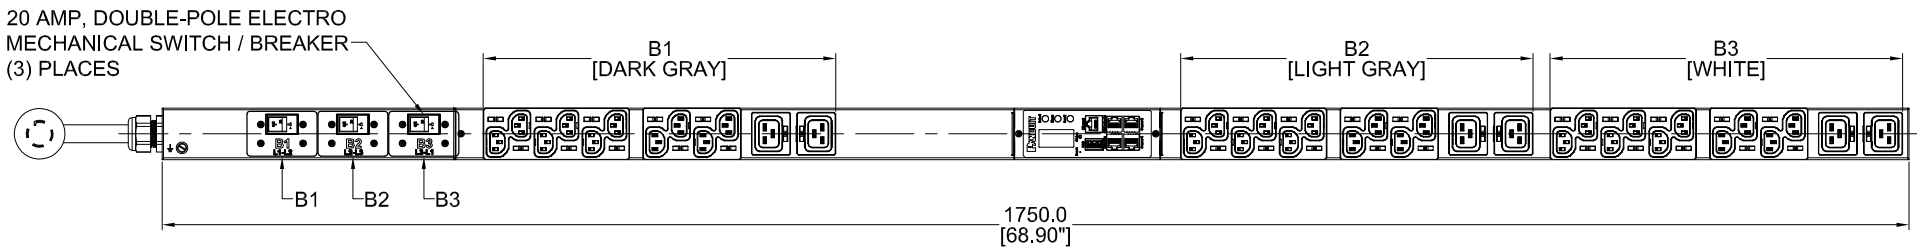

FRONT VIEW

PLUG/RECEPTACLE BLOCK



PLUG
NEMA L15 - 30P, 3P 4W
30A, 250V, 3 - PHASE MAX RATED INPUT
24A DERATED



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION 'DE-CODER'	P36D08M
01A	07/17/2017	WSJ	MIM	EDM	INITIAL RELEASE	P36D08M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36D08M	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	9.4kg
P36D08M-BL1A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	8.4kg
P36D08M-BL1B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	8.9kg
P36D08M-RD1A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	8.4kg
P36D08M-RD1B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	8.9kg
P36D08M-RD1C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10' [+10"/-5"]	9.4kg
P36D08M-WH1A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	8.4kg
P36D08M-WH1B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	8.9kg
P36D08M-WH1C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10' [+10"/-5"]	9.4kg
P36D08M-YL1A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	8.4kg
P36D08M-YL1B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	8.9kg
P36D08M-YL1C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10' [+10"/-5"]	9.4kg
P36D08M-BU1A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	8.4kg
P36D08M-BU1B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	8.9kg
P36D08M-BU1C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10' [+10"/-5"]	9.4kg
P36D08M-GN1A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	8.4kg
P36D08M-GN1B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	8.9kg
P36D08M-GN1C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10' [+10"/-5"]	9.4kg
P36D08M-BL2A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	8.4kg
P36D08M-BL2B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	8.9kg
P36D08M-BL2C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	9.4kg
P36D08M-RD2A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	8.4kg
P36D08M-RD2B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	8.9kg
P36D08M-RD2C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10' [+10"/-5"]	9.4kg
P36D08M-WH2A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	8.4kg
P36D08M-WH2B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	8.9kg
P36D08M-WH2C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10' [+10"/-5"]	9.4kg
P36D08M-YL2A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	8.4kg
P36D08M-YL2B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	8.9kg
P36D08M-YL2C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10' [+10"/-5"]	9.4kg
P36D08M-BU2A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	8.4kg
P36D08M-BU2B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	8.9kg
P36D08M-BU2C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10' [+10"/-5"]	9.4kg
P36D08M-GN2A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	8.4kg
P36D08M-GN2B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	8.9kg
P36D08M-GN2C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10' [+10"/-5"]	9.4kg

B

B

A

A

02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION 'DE-CODER'	P36D08M
01A	07/17/2017	WSJ	MIM	EDM	INITIAL RELEASE	P36D08M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

2



1

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P36D08M-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A	
THIRD ANGLE PROJECTION		Tolerance(mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0	
		DRAWING NUMBER: P36D08M_DC	
DRAWN BY WSJ	DATE 07/17/2017	CHK SEAN	SCALE NONE
SHT 2 OF 2			SCALE B