

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P36D29M-XXYZ	SEE SHEET 2

SPECIFICATION:

1. STANDARD:

UNIT TYPE:	MONITORED INPUT
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY&TYPE:	(30) C13, (6) C19
INPUT VOLTAGE:	200-240VAC
INPUT CURRENT:	50A (28A DERATED)
BREAKER QTY&TYPE:	(3) 20AMP, DOUBLE-POLE
INPUT PHASE:	THREE-PHASE DELTA
RATED POWER:	10.0kVA
INPUT PLUG:	CS8365C
INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT

2. ADDITIONAL:

NONE

3. ACCESSORIES:

(1) QUICK-START GUIDE


NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION


IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P36D29M-XX Y Z


XX: FINISHED GOOD COLOR BL=BLACK YL=YELLOW RD=RED BU=BLUE WH=WHITE GN=GREEN	Y: INPUT FEED TYPE 1=TOP-END FED 2=BOTTOM-END FED	Z: INPUT CORD LENGTH A=1 METER B=2 METER C=3 METER
--	---	---

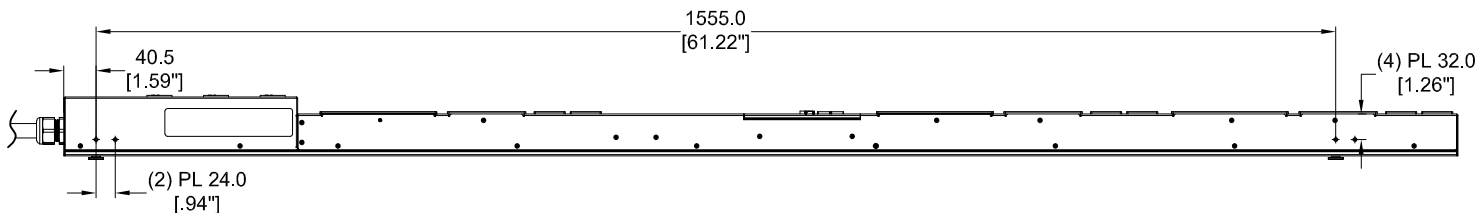


LEFT VIEW

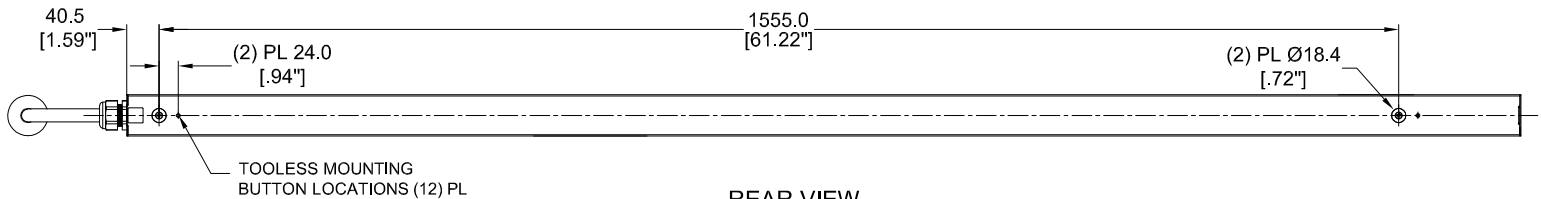


REAR VIEW

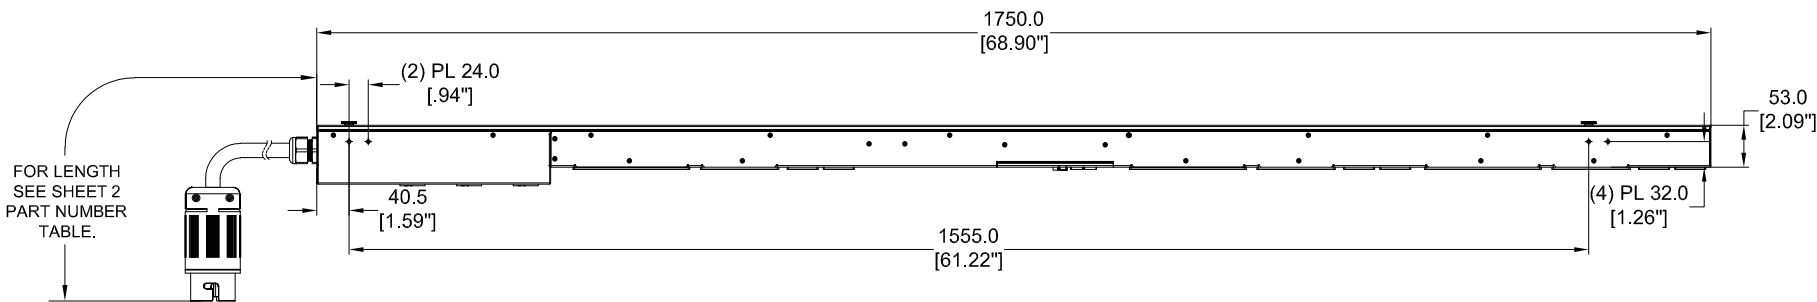

RIGHT VIEW

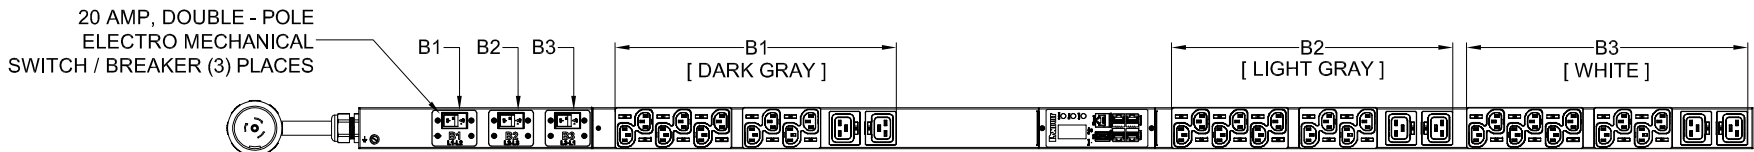

FRONT VIEW



BOTTOM VIEW

PLUG/RECEPTACLE BLOCK



PLUG
CS8365C, 3P 4W
50A, 250V, 3-PHASE DELTA
MAX RATED INPUT
40A DERATED




RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P36D29M
01A	07/27/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P36D29M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN	
		DATE	
		PRINT	
TITLE INTELLIGENT SERIES PDU P36D29M-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME:		PANDUIT	
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]  THIRD ANGLE PROJECTION Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		MATERIAL/COLOR: N/A	
DRAWN BY GEORGE		DRAWING NUMBER: P36D29M_DC	
DATE 07/27/2017	CHK SEAN	SCALE NONE	SHT 1 OF 2
			SCALE B

2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36D29M	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10' [+10"/-5"]	7.9kg
P36D29M-BL1A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	6.1kg
P36D29M-BL1B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	7.0kg
P36D29M-RD1A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	6.1kg
P36D29M-RD1B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	7.0kg
P36D29M-RD1C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10' [+10"/-5"]	7.9kg
P36D29M-WH1A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	6.1kg
P36D29M-WH1B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	7.0kg
P36D29M-WH1C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10' [+10"/-5"]	7.9kg
P36D29M-YL1A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	6.1kg
P36D29M-YL1B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	7.0kg
P36D29M-YL1C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10' [+10"/-5"]	7.9kg
P36D29M-BU1A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	6.1kg
P36D29M-BU1B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	7.0kg
P36D29M-BU1C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10' [+10"/-5"]	7.9kg
P36D29M-GN1A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	6.1kg
P36D29M-GN1B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	7.0kg
P36D29M-GN1C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10' [+10"/-5"]	7.9kg
P36D29M-BL2A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	6.1kg
P36D29M-BL2B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	7.0kg
P36D29M-BL2C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10' [+10"/-5"]	7.9kg
P36D29M-RD2A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED. 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	6.1kg
P36D29M-RD2B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED. 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	7.0kg
P36D29M-RD2C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED. 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10' [+10"/-5"]	7.9kg
P36D29M-WH2A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	6.1kg
P36D29M-WH2B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	7.0kg
P36D29M-WH2C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10' [+10"/-5"]	7.9kg
P36D29M-YL2A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	6.1kg
P36D29M-YL2B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	7.0kg
P36D29M-YL2C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10' [+10"/-5"]	7.9kg
P36D29M-BU2A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	6.1kg
P36D29M-BU2B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	7.0kg
P36D29M-BU2C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10' [+10"/-5"]	7.9kg
P36D29M-GN2A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	6.1kg
P36D29M-GN2B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	7.0kg
P36D29M-GN2C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10' [+10"/-5"]	7.9kg

B



A

B



A

								WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN		
										DATE		
										PRINT		
								TITLE INTELLIGENT SERIES PDU P36D29M-XXYZ CUSTOMER DRAWING				
								ITEM REVISION NAME:				
								DATASHEET FILE NAME:				
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P36D29M	UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A			
01A	07/27/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P36D29M	THIRD ANGLE PROJECTION Tolerance(mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0		DRAWING NUMBER: P36D29M_DC			
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY GEORGE	DATE 07/27/2017	CHK SEAN	SCALE NONE	SHT 2 OF 2	SCALE B

2



1