

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P38D25M-XXYZ	SEE SHEET 2

SPECIFICATION:

1. STANDARD:
UNIT TYPE:
ORIENTATION:
OUTLET QTY & TYPE:
INPUT VOLTAGE:
INPUT CURRENT:
BREAKER QTY & TYPE:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
INPUT POWER CORD:
REGULATORY STANDARD:
- MONITORED INPUT
VERTICAL, 0U FULL
(32) C13, (6) C19
200-240VAC
30A (24A DERATED)
(2) 20AMP, DOUBLE-POLE
SINGLE-PHASE
5.0 kVA
NEMA L6-30P
SEE SHEET 2 FOR PART NUMBER TABLE
RoHS COMPLIANT

2. ADDITIONAL:
NONE
3. ACCESSORIES:
(1) QUICK-START GUIDE

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES] .
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P38D25M-XX Y Z

XX: FINISHED GOOD COLOR			
BL =BLACK	YL =YELLOW		
RD =RED	BU =BLUE		
WH =WHITE	GN =GREEN		

Y: INPUT FEED TYPE	
1 =TOP-END FED	2 =BOTTOM-END FED


Z: INPUT CORD LENGTH	
A =1 METER	B =2 METER
C =3 METER	

BOTTOM VIEW


WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN
DATE
PRINT


TITLE			
INTELLIGENT SERIES PDU P38D25M-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:	
		N/A	
THIRD ANGLE PROJECTION		DRAWING NUMBER:	
		P38D25M_DC	
DRAWN BY	DATE	CHK	SCALE
WSJ	07/17/2017	SEAN	NONE
			SCALE
SHT 1 OF 2			B

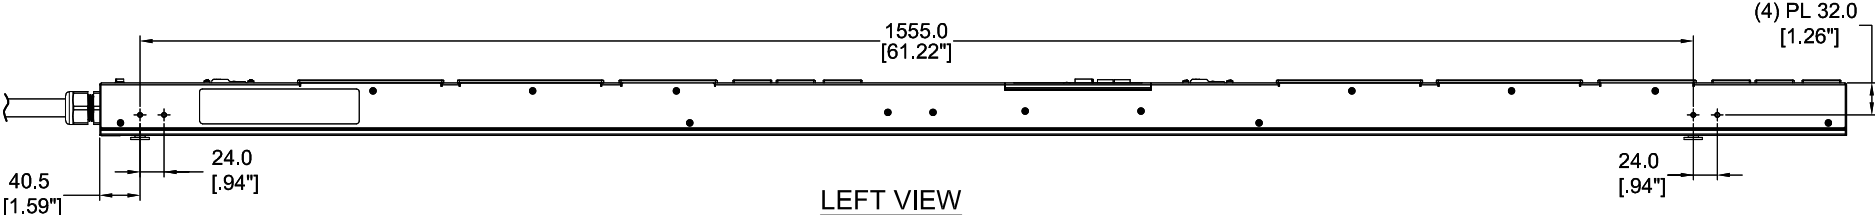


LEFT VIEW

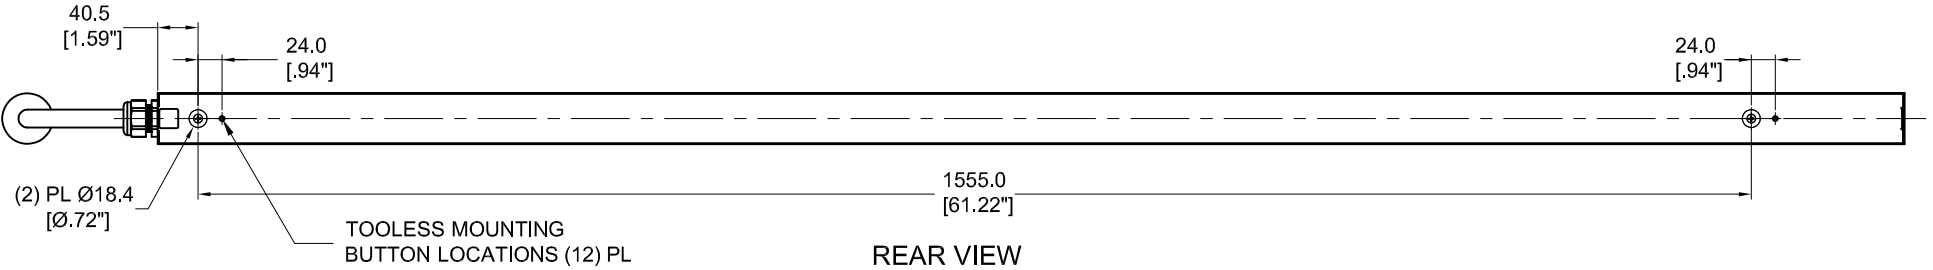

REAR VIEW

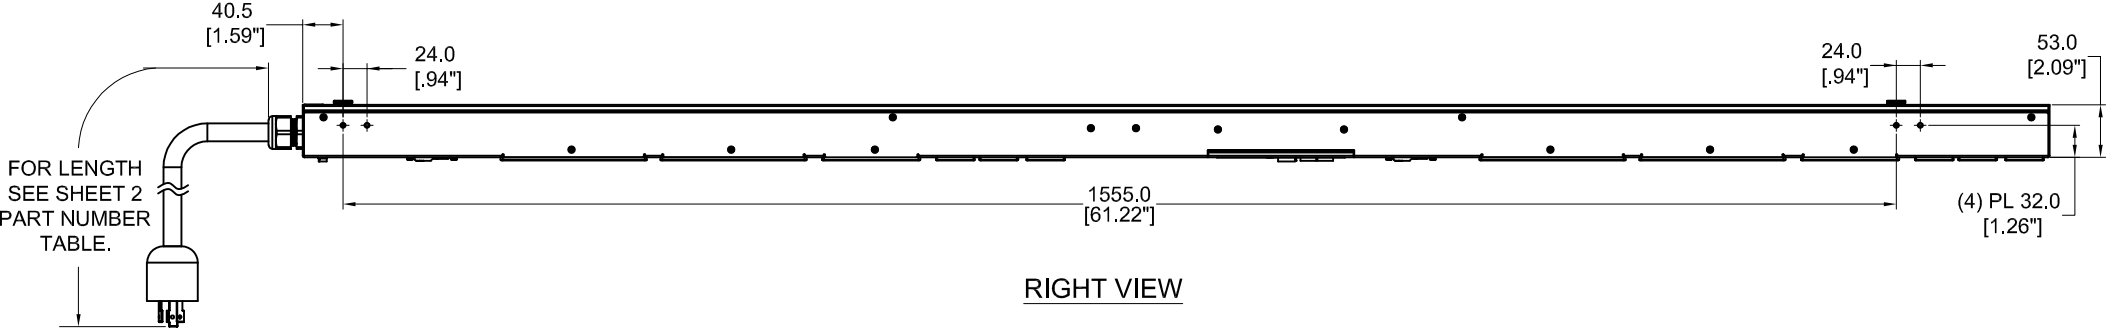

RIGHT VIEW

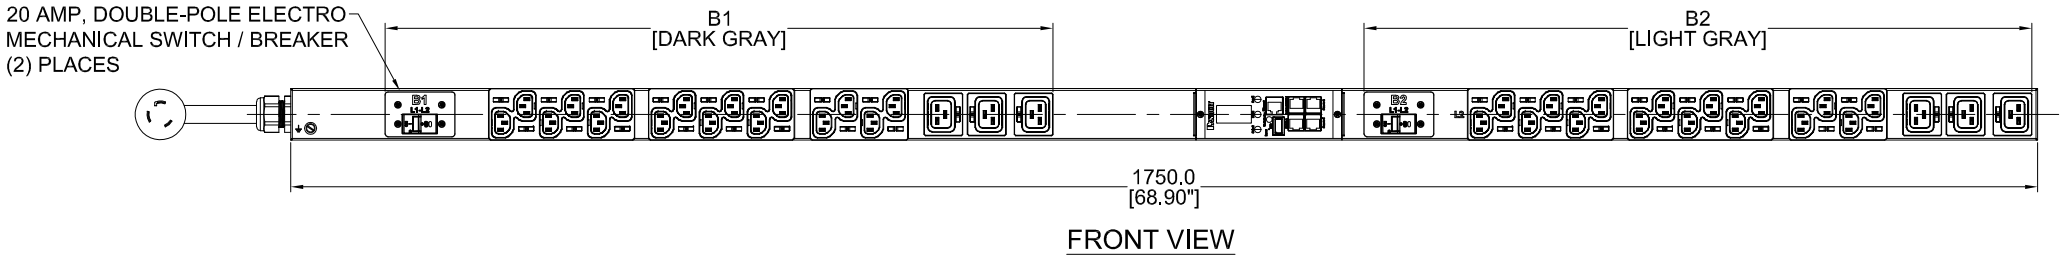

FRONT VIEW

PLUG/RECEPTACLE BLOCK



PLUG
NEMA L6 - 30P, 2P 3W
30A, 250V MAX RATED INPUT
24A DERATED



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION "DE-CODER"	P38D25M
01A	07/17/2017	WSJ	MIM	EDM	INITIAL RELEASE	P38D25M

2

↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P38D25M	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	10.2kg
P38D25M-BL1A	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	9.4kg
P38D25M-BL1B	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	9.8kg
P38D25M-RD1A	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	9.4kg
P38D25M-RD1B	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	9.8kg
P38D25M-RD1C	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10' [+10"/-5"]	10.2kg
P38D25M-WH1A	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	9.4kg
P38D25M-WH1B	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	9.8kg
P38D25M-WH1C	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10' [+10"/-5"]	10.2kg
P38D25M-YL1A	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	9.4kg
P38D25M-YL1B	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	9.8kg
P38D25M-YL1C	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10' [+10"/-5"]	10.2kg
P38D25M-BU1A	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	9.4kg
P38D25M-BU1B	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	9.8kg
P38D25M-BU1C	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10' [+10"/-5"]	10.2kg
P38D25M-GN1A	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	9.4kg
P38D25M-GN1B	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	9.8kg
P38D25M-GN1C	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10' [+10"/-5"]	10.2kg
P38D25M-BL2A	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	9.4kg
P38D25M-BL2B	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	9.8kg
P38D25M-BL2C	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	10.2kg
P38D25M-RD2A	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	9.4kg
P38D25M-RD2B	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	9.8kg
P38D25M-RD2C	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10' [+10"/-5"]	10.2kg
P38D25M-WH2A	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	9.4kg
P38D25M-WH2B	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	9.8kg
P38D25M-WH2C	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10' [+10"/-5"]	10.2kg
P38D25M-YL2A	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	9.4kg
P38D25M-YL2B	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	9.8kg
P38D25M-YL2C	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10' [+10"/-5"]	10.2kg
P38D25M-BU2A	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	9.4kg
P38D25M-BU2B	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	9.8kg
P38D25M-BU2C	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10' [+10"/-5"]	10.2kg
P38D25M-GN2A	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	9.4kg
P38D25M-GN2B	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	9.8kg
P38D25M-GN2C	VERTICAL,(32) C13,(6) C19,MONITORED INPUT, 200-240V/30A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10' [+10"/-5"]	10.2kg

02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION 'DE-CODER'	P38D25M
01A	07/17/2017	WSJ	MIM	EDM	INITIAL RELEASE	P38D25M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX.
THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN
DATE
PRINT

TITLE
INTELLIGENT SERIES PDU
P38D25M-XXYZ
CUSTOMER DRAWING

ITEM REVISION NAME
DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

THIRD ANGLE
PROJECTION

Tolerance(mm)
0<L≤50 ±0.5
50<L≤250 ±1.0
250<L≤500 ±1.5
500<L≤1000 ±2.5
1000<L≤2000 ±4.0

MATERIAL/COLOR:
N/A

DRAWING NUMBER:
P38D25M_DC

DRAWN BY
WSJ

DATE
07/17/2017

CHK
SEAN

SCALE
NONE

SHT 2 OF 2

SCALE
B