


PANDUIT P/N	WEIGHT
P42B17M	5.7kg


NOTES:

- IDENTIFICATION:


UNIT TYPE:	BASIC
ORIENTATION:	VERTICAL, MID
OUTLET QTY&TYPE:	(36) C13, (6) C19
BREAKER QTY&TYPE:	(2) 20A, DOUBLE-POLE
INPUT VOLTAGE:	200-240VAC
INPUT CURRENT:	30A (24A DERATED)
INPUT PHASE:	SINGLE PHASE
RATED POWER:	5.0kVA
INPUT PLUG:	NEMA L6-30P
INPUT CORD LENGTH:	3m [10']
- ACCESSORIES:
 - POCKET GUIDE
- RoHS COMPLIANT
- VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- MAXIMUM ALLOWABLE INPUT POWER = 5.0kW
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

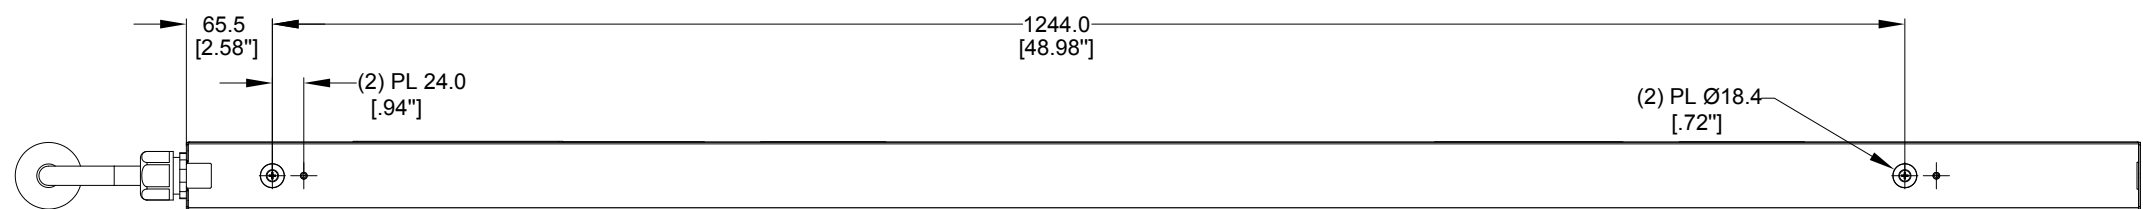

REAR VIEW

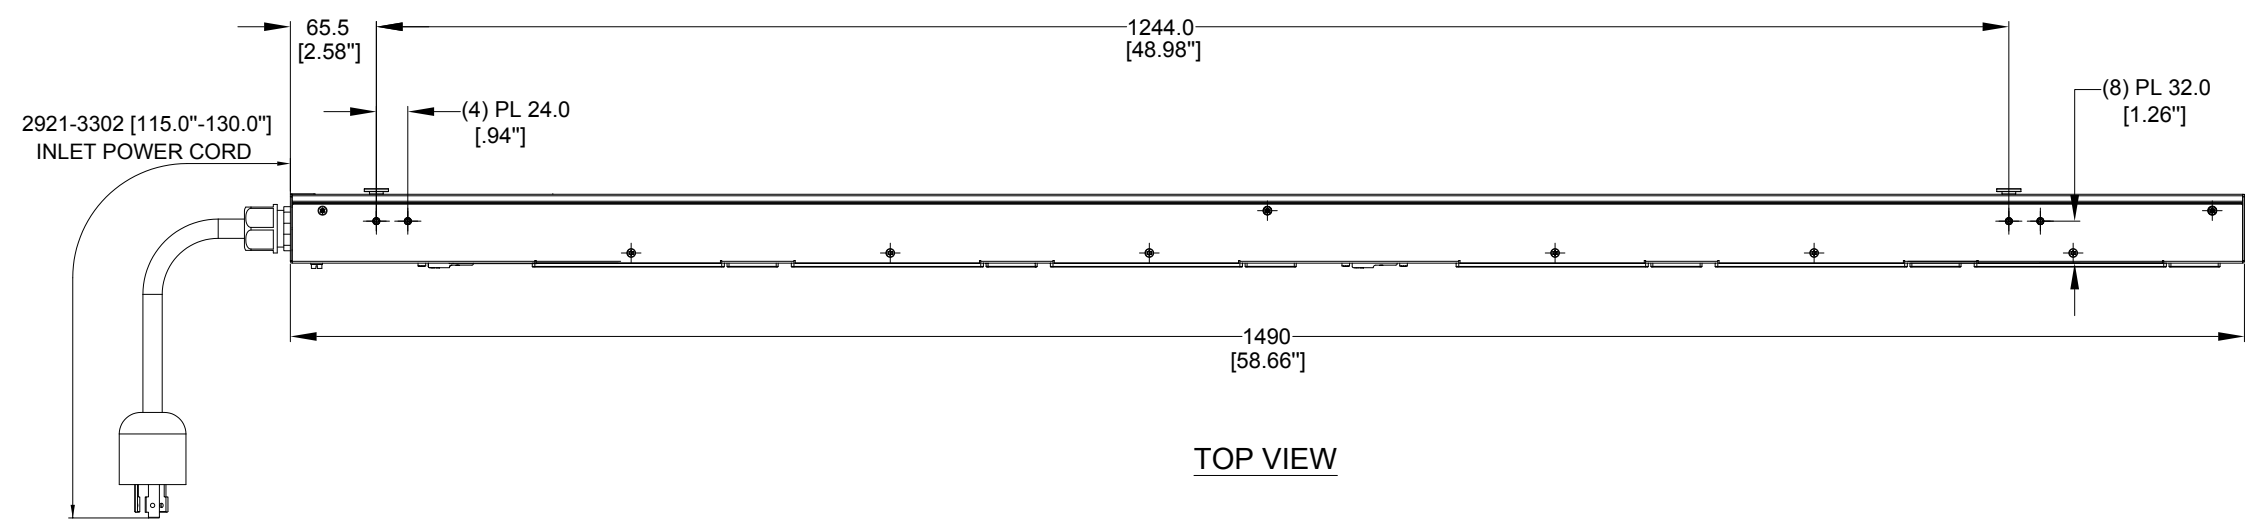


TOP VIEW

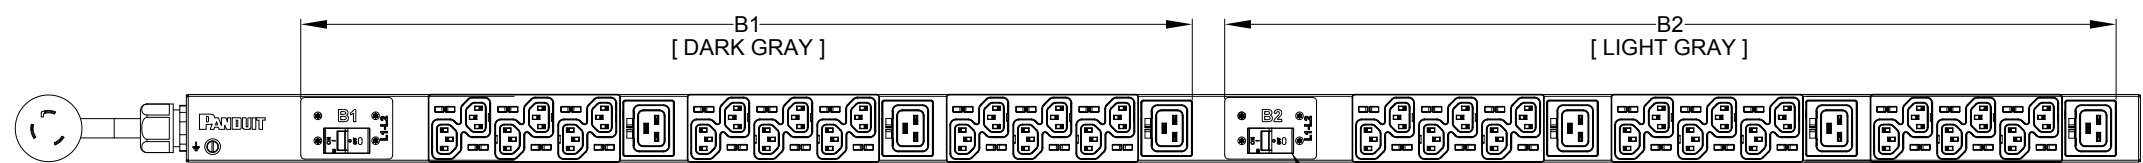

FRONT VIEW

20 AMP, DOUBLE - POLE ELECTRO-MECHANICAL SWITCH / BREAKER (2) PLACES

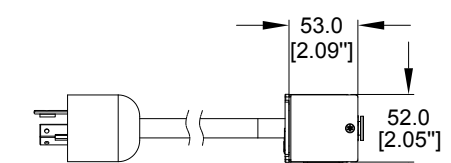

SIDE VIEW

PLUG
30 AMP, 250V
TWIST LOCK
NEMA L6-30P

SIX (6)
RECEPTACLES
16 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C19

THIRTY-SIX (36)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C13

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01B	08/21/2017	HANSON	MIM	EDM	REVISED TOLERANCES	P42B17M
01A	06/28/2017	HANSON	MIM	EDM	INITIAL RELEASE	P42B17M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE BASIC SERIES PDU P42B17M CUSTOMER DRAWING		
ITEM REVISION NAME		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:
Tolerance(mm)		N/A
THIRD ANGLE PROJECTION		DRAWING NUMBER: P42B17M_DC
DRAWN BY: Hanson	DATE: 05/24/2017	SCALE: NONE
CHK: SEAN	SCALE: NONE	SHT 1 OF 1
		SCALE: B