


2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

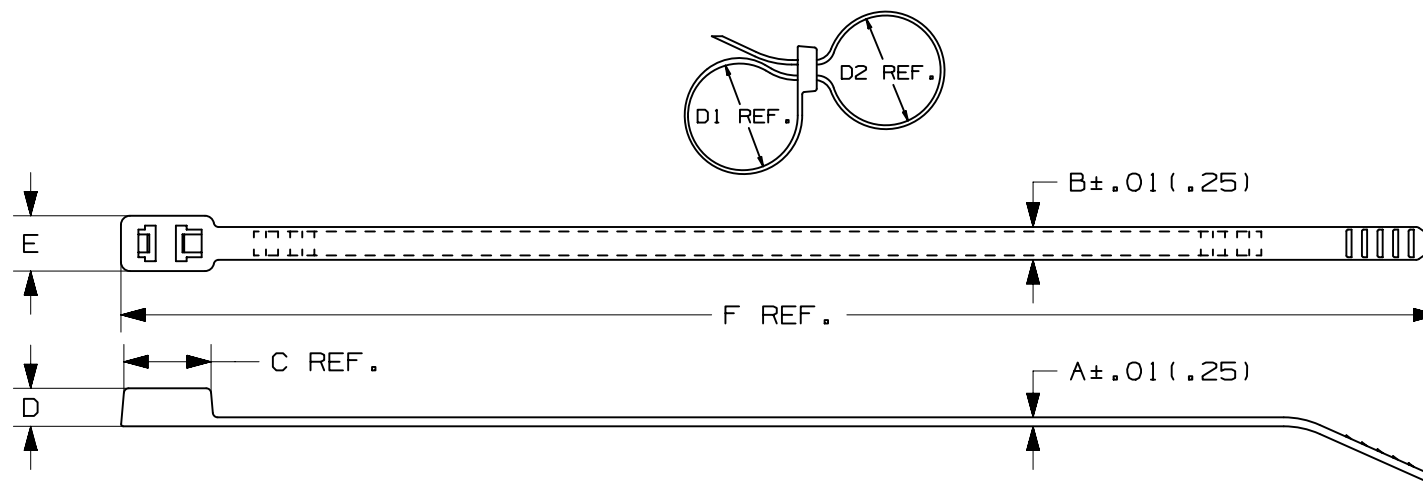

PANDUIT * PART NO.	MAX. COMBINED BUNDLE DIA. D1 + D2 in (mm)	A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	MIN. LOOP TENSILE lbs (N)	CROSS- SECTION	WEIGHT lbs/100pcs (g)
PLB2S	1.8 (45.7)	.052 (1.3)	.190 (4.8)	.465 (11.8)	.220 (5.6)	.320 (8.1)	7.6 (193)	50 (222)	STANDARD	.34 (154)
PLB3S	3.0 (76.2)	.052 (1.3)	.190 (4.8)	.465 (11.8)	.220 (5.6)	.337 (8.6)	11.8 (300)	50 (222)	STANDARD	.47 (214)
PLB4S	4.1 (104.1)	.052 (1.3)	.190 (4.8)	.465 (11.8)	.220 (5.6)	.337 (8.6)	14.8 (376)	50 (222)	STANDARD	.58 (262)

* SEE www.panduit.com FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR

						TITLE BOW-TY CABLE TIES PLB SERIES CUSTOMER DRAWING						
						ITEM REVISION NAME 10B0150W/00				PANDUIT		
						DATASET FILE NAME 10B0150W_DC_PLB/00A						
						UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .XX ± .02 [.5] .XXX ± .020 [.51] ANGLES ±						
						THIRD ANGLE PROJECTION				MATERIAL: NONE		
						DRAWING NUMBER: SS-21645						
6	11.20.14	BDK	MPH	JADE	UPDATED TITLE BORDER AND UPDATED NOTES	SS-21645						
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
							KEM	4/6/87	HVP	NONE		A

2

1

D101000A/16