
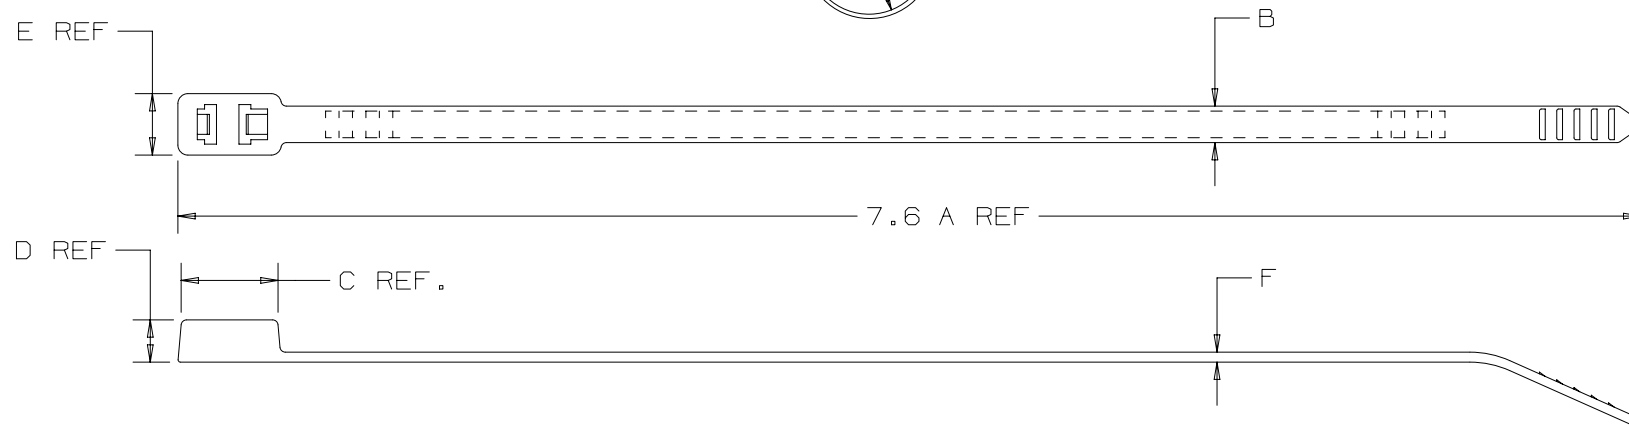





PANDUIT PART NO. *	MAX. COMBINED BUNDLE DIA. D1 + D2 in (mm)	A in (mm)	B $\pm .01 \text{ in}$ ($\pm .25 \text{ mm}$)	C in (mm)	D in (mm)	E in (mm)	F $\pm .01 \text{ in}$ ($\pm .25 \text{ mm}$)	MIN. LOOP TENSILE lbs (N)	CROSS SECTION	WEIGHT lbs/100 pcs (g)
PLB2S-M30	1.8 (45.7)	7.6 (193)	.190 (4.8)	.465 (11.8)	.220 (5.6)	.320 (8.1)	.052 (1.3)	50 (222)	STANDARD	.34 (154)

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

							TITLE PLB2S-M30 BOW-TY CABLE TIE - PLB SERIES CONTROL DRAWING				
							ITEM REVISION NAME SS_27025_02/AB				
							DATASET FILE NAME SS_27025_REV03				
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± - - - .XXX ± .020 (.51) .XX ± .02 (.5) ANGLES ± - - -				
							 THIRD ANGLE PROJECTION				
03	4/22/14	BWG	MPH	JADE	UPDATED TITLE BORDER AND REPLACED MISSING TOLERANCES.	SS-27025/03				MATERIAL: HEAT STABILIZED BLACK NYLON 6/6	
							DRAWING NUMBER: SS-27025				
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY KET	DATE 6/4/96	CHK HVP	SCALE NONE	SIZE A