


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

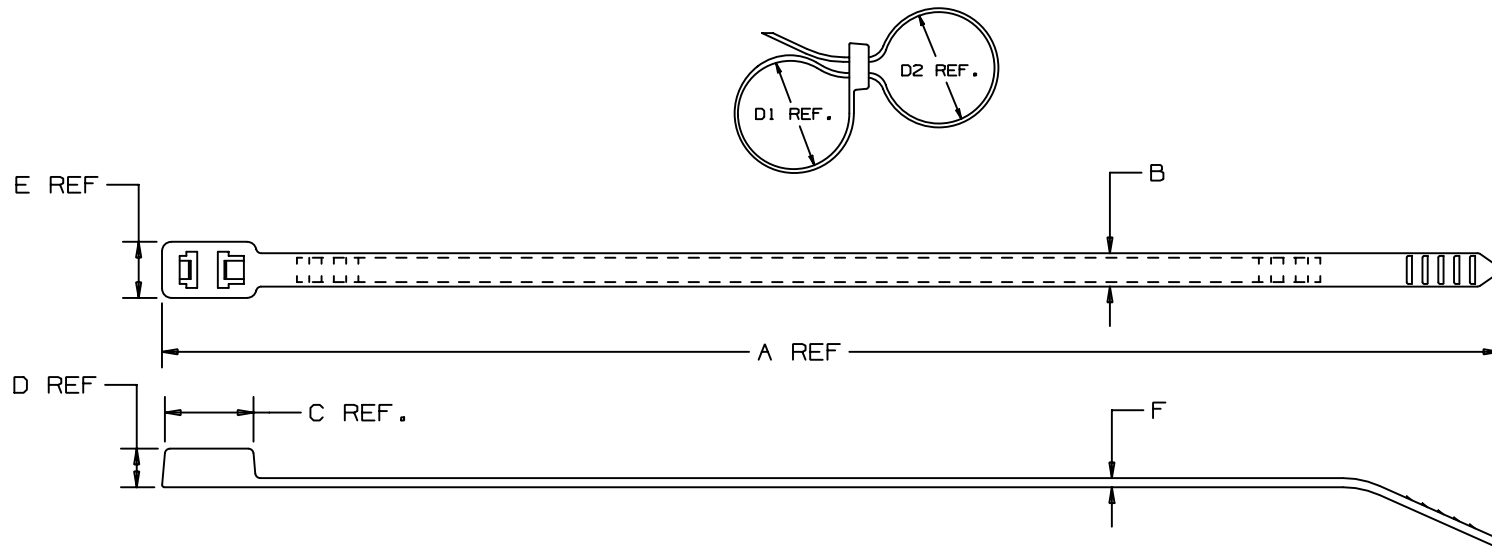

PANDUIT PART NO. *	MAX. COMBINED BUNDLE DIA. D1 + D2 in (mm)	A in (mm)	B ±.01 in (±.25mm)	C in (mm)	D in (mm)	E in (mm)	F ±.01 in (±.25mm)	MIN. LOOP TENSILE lbs (N)	CROSS SECTION	WEIGHT lbs/100 pcs. (g)
PLB3S-M30	3.0 (76.2)	11.8 (300)	.190 (4.8)	.465 (11.8)	.220 (5.6)	.337 (8.6)	.052 (1.3)	50 (222)	STANDARD	.47 (214)

										DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS	
										PANDUIT CORP. TINLEY PARK, ILLINOIS	
										PLB3S-M30 BOW-TY CABLE TIE PLB SERIES	
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ± (.XX) ± ANGLES ±	
										UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
										DRAWN BY KET	MAT'L:
										DATE 6/4/96	HEAT STABILIZED BLACK NYLON 6/6
										CHK'D HVP	SCALE NONE
2	4/29/02	TJ		CHANGED FORMAT FOR CLARITY	27026	2				DRAWING NO. SS-27026	DWG A SIZE
REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP				