


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.




COMPATIBLE PADLOCKS

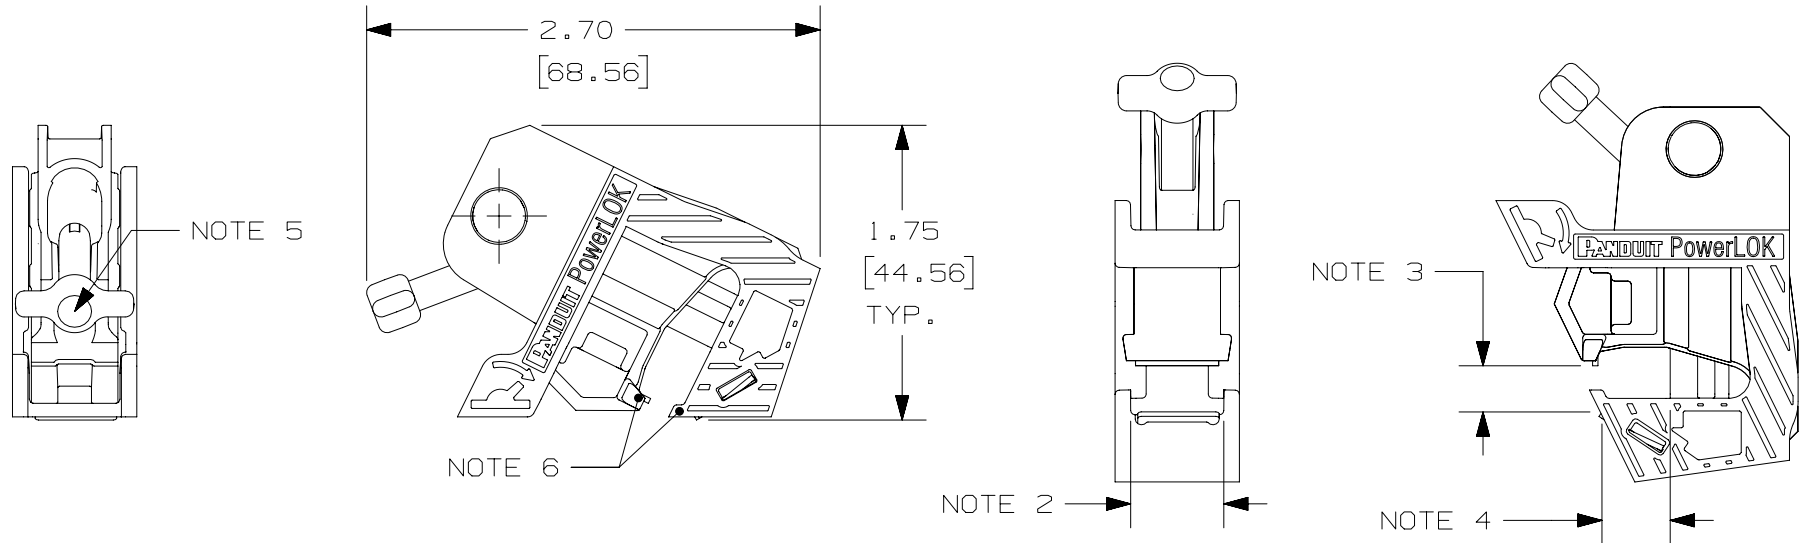

PSL-7 SERIES
PSL-8 SERIES
PSL-12 SERIES
PSL-CS SERIES

NOTES:

1. MILLIMETERS ARE SHOWN IN BRACKETS
2. MAX SWITCH WIDTH: 0.55 [13.97]
3. MAX OPENING 0.64 [16.26]
MIN OPENING 0.18 [4.57]
4. MAX THROAT DEPTH: 0.40 [10.16]
5. RECOMMENDED TOGGLE SCREW TORQUE: 60 IN-OZ
6. FEATURES INDICATED ALLOW DEVICE TO GRIP EXTERNALLY TIED MULTIPOLE BREAKERS. FEATURES SHOULD BE INSERTED BELOW THE TIE BAR OF EXTERNALLY TIED BREAKERS. ONCE THESE FEATURES ARE POSITIONED, TIGHTEN SET SCREW OF DEVICE TO SECURE BREAKER. DEVICE SHOULD BE CENTERED ON TIE BAR.

							TITLE				
							PSL-PCBNT POWERLOK				
							CUSTOMER DRAWING				
							ITEM REVISION NAME		I00230AA/06		
							DATASET FILE NAME		I00230AA_DC_C11065/06B		
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]				MATERIAL:
							.X ± - .XXX ± - .XX ± .01 [.25] ANGLES ± -				RED NYLON
											DRAWING NUMBER:
											C 1 1 0 6 5
							DRAWN BY	DATE	CHK	SCALE	
							MROB	7/16/13	KLN	NTS	
							SHT 1 OF 1				A
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN					
01	4/18/17	RVU	CLW	JHAC	REMOVE PSL-6 SERIES FROM THE REFERENCE.	GAECN04097					
00	7/16/13	MROB	MJPF	KLN	DRAWING RELEASE	GAECN01042					