



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

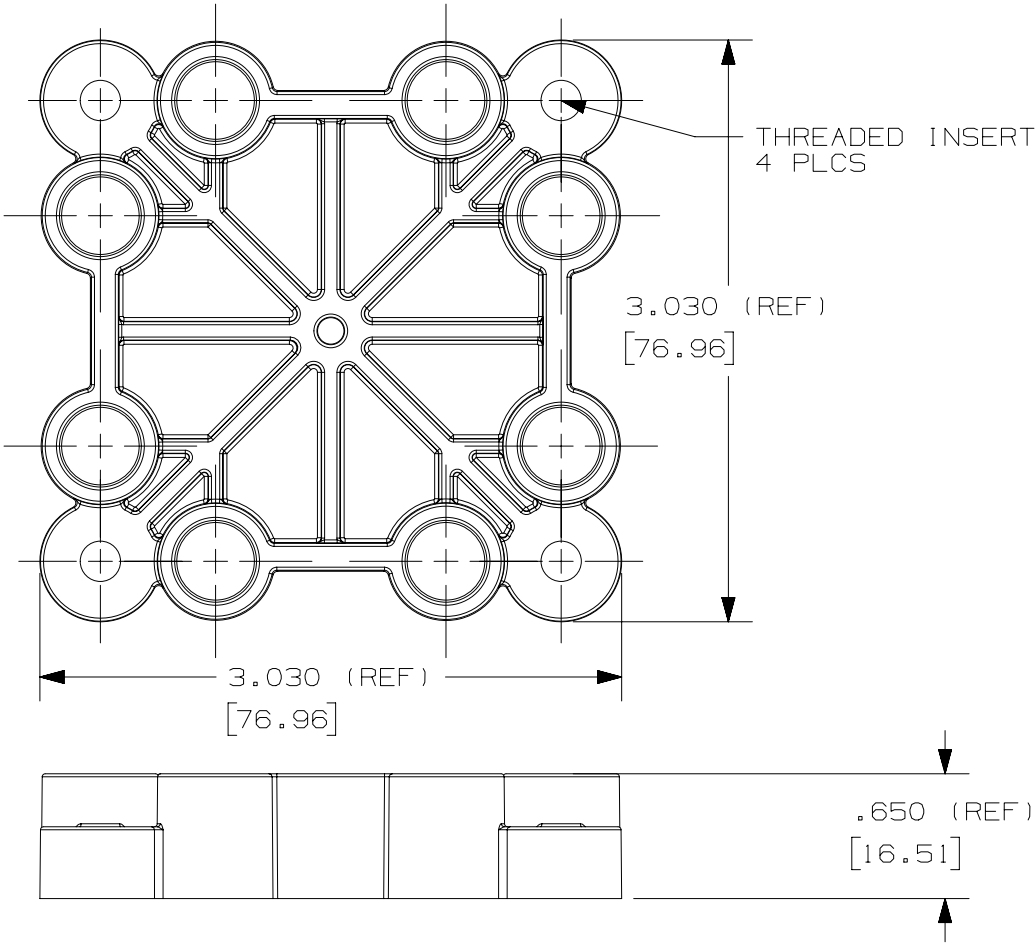

NOTES:

1. DIMENSIONS IN BRACKETS [] ARE METRIC [mm].
2. PRODUCT DESIGNED AS OPTIONAL METHOD TO CONNECT ADJOINING QB-TILES.
3. PRODUCT IS RATED FOR ENVIRONMENTAL CONDITIONS OF 40-100°F IN ALL HUMIDITY RANGES.
4. PRODUCT IS 20% GF NYLON WITH ALUMINUM INSERTS
5. COMPATIBLE WITH FLATHEAD PHILLIPS DRIVE #10-32 X 1-1/4" SCREWS (INCLUDED).

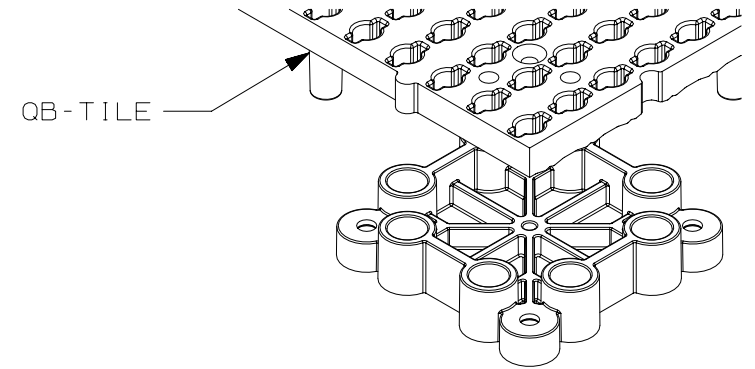

SCALE 1:2

| 00 | 07-01-15 | ANF | DJW | MSAD | DRAWING RELEASED | | | | GAECN03015 |
|-----|----------|-----|-----|------|------------------|--|--|--|------------|
| REV | DATE | BY | CHK | APR | DESCRIPTION | | | | ECN |

| | | | | | | | | | |
|---|--|--|--|--|-------------|--|--|--|--|
| <p>TITLE</p> <p>QUICK-BUILD GRID CONNECTOR; OPTIONAL TO SECURE TILES; 5 PER PACKAGE (QB-CONN)</p> <p>CUSTOMER DRAWING</p> | | | | | | | | | |
| ITEM REVISION NAME | | | | | 14L203AU/01 | | | | |
| DATASET FILE NAME | | | | | 14L203AU-DC | | | | |
| <p>UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]</p> <p>.x ± .1 [2.54] .xxx ± .005 [.127]</p> <p>.xx ± .01 [.25] ANGLES ± 5 °</p> | | | | | | | | | |
| DRAWN BY | | | | | ANF | | | | |
| DATE | | | | | 07-01-15 | | | | |
| CHK | | | | | DJW | | | | |
| SCALE | | | | | 1:1 | | | | |
| <p>MATERIAL:</p> <p>SEE NOTES</p> | | | | | | | | | |
| <p>DRAWING NUMBER:</p> <p>14L203AU-DC</p> | | | | | | | | | |
| SHT 1 OF 1 | | | | | A | | | | |