

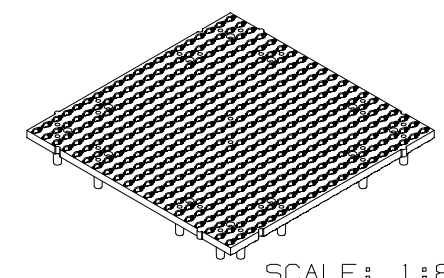
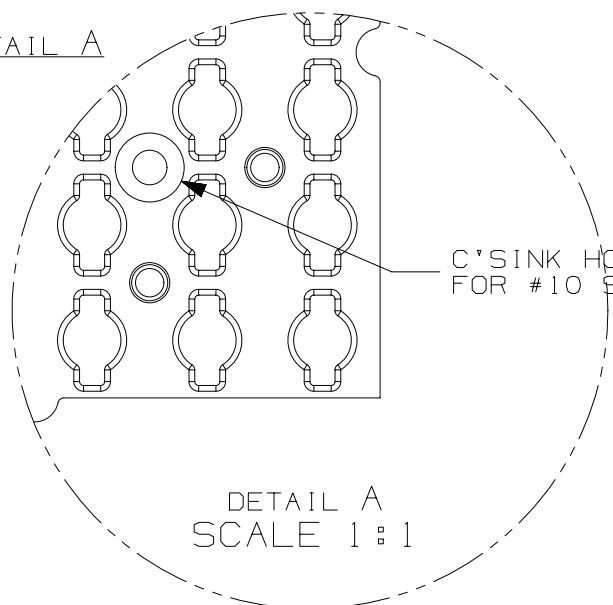


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

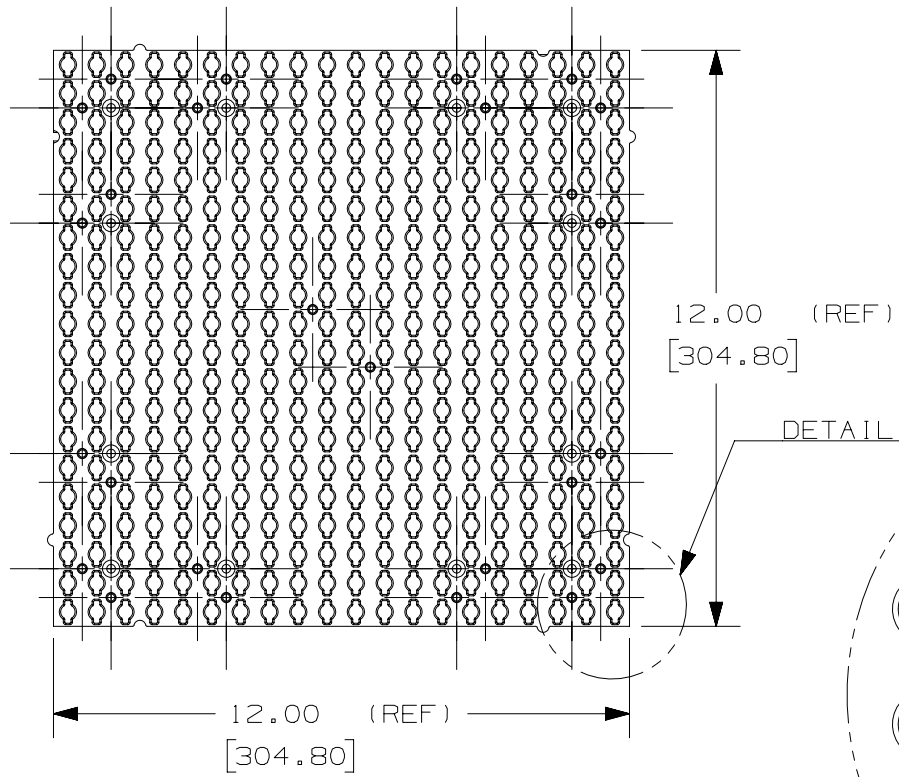

NOTES:

1. DIMENSIONS IN BRACKETS [ ] ARE METRIC [ mm ].
2. COLOR: BLACK
3. PRODUCT DESIGNED TO SUPPORT A MAXIMUM STATIC LOAD OF 5 LBS WITH COMPATIBLE PARTS.
4. PRODUCT IS RATED FOR ENVIRONMENTAL CONDITIONS OF 40-100°F IN ALL HUMIDITY RANGES.
5. FOR INSTALLATION INTO PLYWOOD, #8 OR #10 COARSE THREAD FLAT HEAD WOOD SCREWS WITH A MIN LENGTH OF 1.75" ARE RECOMMENDED.

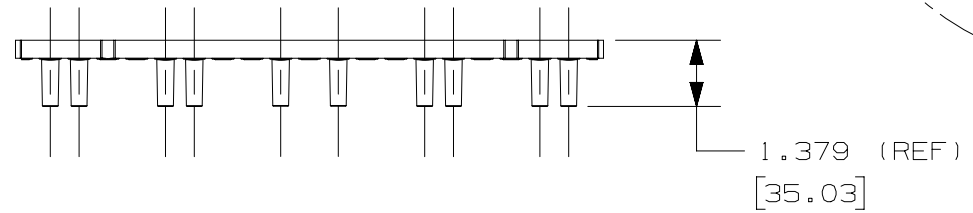

TITLE		QUICK-BUILD GRID TILE; 1' X 1'; 8 PER PACKAGE (QB-TILE)			CUSTOMER DRAWING	
ITEM REVISION NAME		13L179EK/09			<b>PANDUIT</b>	
DATASET FILE NAME		13L179EK_DC/09				
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]		.x ± .1 [ 2.54 ]      .xxx ± .005 [ .127 ] .xx ± .01 [ .25 ]      ANGLES ± 5 °			MATERIAL:  ABS	
DRAWN BY		DATE	CHK	SCALE	DRAWING NUMBER: 13L179EK-DC	
ANF	06-10-2015			1:4	SHT 1 OF 1	A

00	6/10/15	ANF	DJW	MSAD	DRAWING RELEASED	GAECN02965
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN