


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER	MATERIAL	"B" HEIGHT +/- .062	"C" IMPRINT AREA +/- .062	"D" VERTICAL REPEAT +/- .062	LABELS PER ROW	STANDARD PKG. QTY.
S100X075VA1Y	GM16 OR GM17	0.75 [19.1]	0.25 [6.35]	1.00 [25.4]	4	2500
S100X125VA1Y		1.25 [31.8]	0.38 [9.65]	1.50 [38.1]		
S100X150VA1Y		1.50 [38.1]	0.50 [12.7]	1.80 [45.7]		
S100X225VA1Y		2.25 [57.2]	0.75 [19.1]	2.50 [63.5]		1500
S100X250VA1Y		2.50 [63.5]	1.00 [25.4]	2.75 [69.8]		
S100X400VA1Y		4.00 [101.6]	1.00 [25.4]	4.25 [108.0]		
S100X650VA1Y		6.50 [165.1]	1.50 [38.1] +/- .10	6.75 [171.4]		
					250	

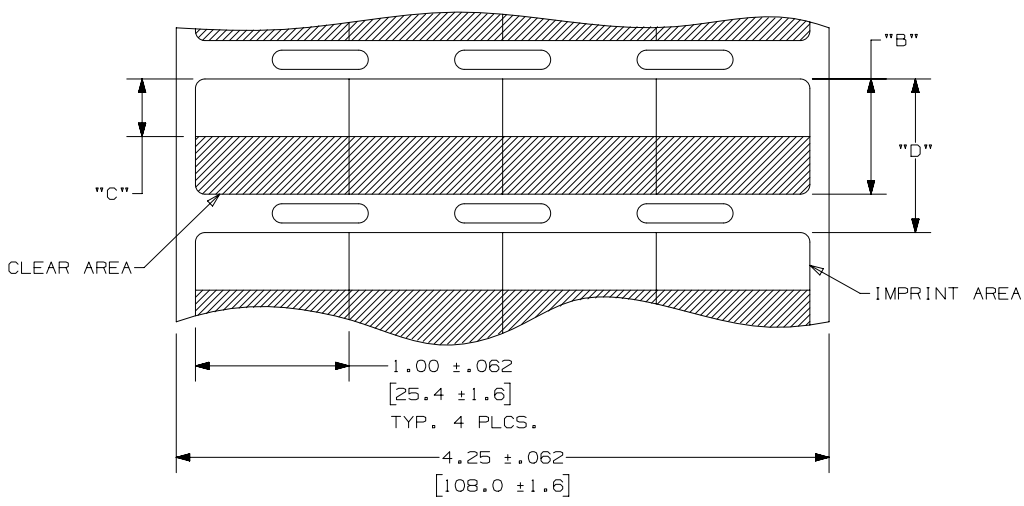

NOTES:
1. MILLIMETERS ARE IN [].

9	12/7/15	RVU	SEWH	JHAC	S100X650VA1Y WAS S100X600VA1Y.	GAECN03273
8	8/18/15	RVU	SEWH	JHAC	UPDATE ON NEW BOARDER WITH PANDUIT LOGO.	GAECN03102
7	10/25/11	RVU			"GMV16 OR GMV17" WAS "GMV".	6548
6	12/10/09	RVU			GMV WAS GMV16. ADD +/- .10 TO 1.50.	5925
5	10/1/09	RVU			MILLIMETERS INCORRECT. [63.5] WAS [57.2], [9.65] WAS [9.53], [25.4] WAS [19.0], & [38.1] WAS [12.7].	5863
4	2/25/09	RVU			OBSOLETE PARTS: S***X***VA1, AND S***X***TA1. UPDATE TOLERANCE WITH +/- .062.	5682
3	6/13/08	RVU			VOID	5464
2	5/25/07	RVU			ADDED NEWPN, S100X225VA1Y.	5021
1	1/8/07	RVU			REVISED TOLERANCE.	4830
0	9/11/06	RVU			DRAWING RELEASED.	4671
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE		S100X***VA1Y OPTIMUM SELF-LAMINATING THERMAL TRANSFER PRINTABLE LABELS CUSTOMER DRAWING		
ITEM REVISION NAME		100472BS/13		
DATASET FILE NAME		100472BS_DC_C10194/13K		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		PANDUIT SEE TABLE		
.x ± .12 [3.05] .xxx ± .025 [.635] .xx ± .062 [1.57] ANGLES ±				
DRAWING NUMBER:		C10194		
DRAWN BY	DATE	CHK	SCALE	SIZE
RVU	9/22/04	JHAC	NTS	A