
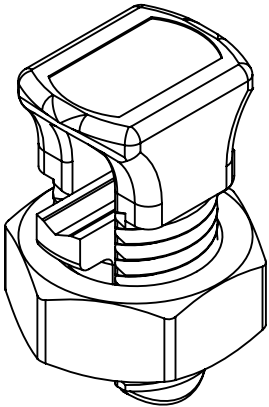
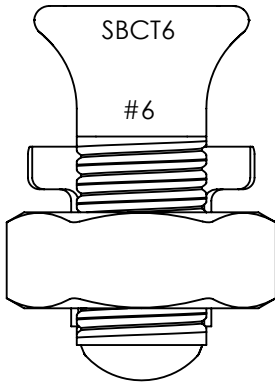




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. HIGH STRENGTH ELECTROLYTIC
COPPER HIGHLY RESISTANT TO
CORROSION AND SEASON CRACKING.
2. ELECTRO-TIN PLATED BOLT. NUT
SPACER AND PRESSURE BAR.
3. WHEN CONNECTING ALUMINUM OR
ACSR WIRE, USE OF PANDUIT OXIDE
JOINT COMPOUND CMP-100 IS
RECOMMENDED.
4. UL LISTED & CSA CERTIFIED (FOR
APPLICABLE PARTS) WITH COPPER
AND ALUMINUM CABLE.
5. PARTS ARE UL LISTED TO UL467 AND UL486. PARTS
ARE CSA CERTIFIED.
6. PARTS ARE SUITABLE FOR DIRECT BURIAL.

PART NUMBER	COPPER & ALUMINUM CONDUCTOR								APPROXIMATE DIMENSIONS - INCHES				REQUIRED TORQUE (IN-LB)
	MAXIMUM RUN TO MAXIMUM TAP		MINIMUM RUN TO MINIMUM TAP		MAXIMUM RUN TO MINIMUM TAP		MINIMUM EQUAL						
	RUN	TAP	RUN	TAP	RUN	TAP	RUN	TAP	A	B	C	D	
SBCT8	6 SOL	6 SOL	8 STR 8 SOL	14 STR 14 SOL	6 STR 6 SOL	14 STR 14 SOL	8 STR 8 SOL	8 STR 8 SOL	0.16	0.41	0.63	1.06	165
SBCT6	6 STR 6 SOL	6 STR 6 SOL	8 STR 8 SOL	10 STR 10 SOL	6 STR 6 SOL	10 STR 10 SOL	8 STR 8 SOL	8 STR 8 SOL	0.21	0.49	0.68	1.10	165
SBCT3	4 STR 4 SOL	4 STR 4 SOL	6 STR 6 SOL	10 STR 10 SOL	4 STR 4 SOL	10 STR 10 SOL	8 STR 8 SOL	8 STR 8 SOL	0.27	0.58	0.81	1.24	275
SBCT2	2 STR 2 SOL	2 STR 2 SOL	6 STR 6 SOL	14 STR 14 SOL	2 STR 2 SOL	14 STR 14 SOL	6 STR 6 SOL	6 STR 6 SOL	0.31	0.60	0.86	1.45	275
SBCT1/0	1/0 STR 1/0 SOL	1/0 STR 1/0 SOL	2 STR 2 SOL	10 STR 10 SOL	1/0 STR 1/0 SOL	10 STR 10 SOL	4 STR 4 SOL	4 STR 4 SOL	0.37	0.75	0.93	1.73	385
SBCT2/0	2/0 STR 2/0 SOL	2/0 STR 2/0 SOL	1 STR 1 SOL	8 STR 8 SOL	2/0 STR 2/0 SOL	8 STR 8 SOL	2 STR 2 SOL	2 STR 2 SOL	0.42	0.79	1.05	1.71	385
PART NUMBER	COPPER CONDUCTOR								APPROXIMATE DIMENSIONS - INCHES				REQUIRED TORQUE (IN-LB)
	MAXIMUM RUN TO MAXIMUM TAP		MINIMUM RUN TO MINIMUM TAP		MAXIMUM RUN TO MINIMUM TAP		MINIMUM EQUAL						
	RUN	TAP	RUN	TAP	RUN	TAP	RUN	TAP	A	B	C	D	
SBCT3/0	3/0 STR 3/0 SOL	3/0 STR 3/0 SOL	2/0 STR 2/0 SOL	8 STR 8 SOL	3/0 STR 3/0 SOL	8 STR 8 SOL	1 STR 1 SOL	1 STR 1 SOL	0.53	0.95	1.25	2.12	500
SBCT250	250 STR	250 STR	4/0 STR 4/0 SOL	8 STR 8 SOL	250 STR	8 STR	1 STR 1 SOL	1 STR 1 SOL	0.58	1.03	1.36	2.22	650
SBCT350	350 STR	350 STR	350 STR	1/0 STR	350 STR	1/0 STR	2/0 STR 2/0 SOL	2/0 STR 2/0 SOL	0.70	1.17	1.49	2.55	650
SBCT500	500 STR	500 STR	400 STR	2/0 STR	500 STR	2/0 STR	300 STR	300 STR	0.82	1.32	1.74	2.95	825

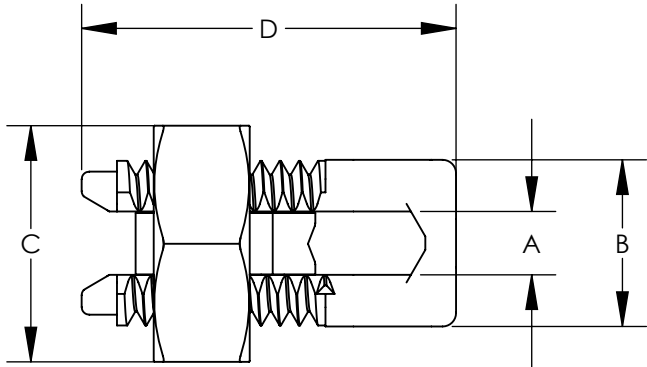

							TITLE SBCT SERIES - COPPER DUAL RATED SPLIT BOLT CONNECTOR CUSTOMER DRAWING						
							ITEM REVISION NAME N10850BL-C41151/06						
							DATASET FILE NAME C41511/06.SLDDRW						
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .XX ± .XXX ± ANGLES ±  THIRD ANGLE PROJECTION				MATERIAL SEE NOTES		
06	4/21	JHNU	JHNU	JADE	REVISED TABLE	098940							
05	10/15	JHNU	JHNU	RGB	REVISED MARKING LOCATION ADDED NOTE TO SPECIFY PARTS ARE UL 486 AND UL467	N10850BL-C41511							
04	3/13	JHNU	JHNU	RGB	REVISED TITLE BLOCK	N10850BL-C41511							
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY JHNU	DATE 5/07	CHK JAC	SCALE N/A	SHEET 1 OF 1		SIZE B