
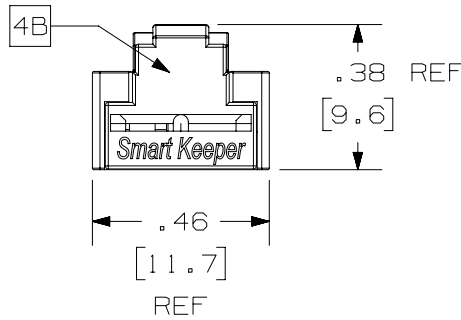
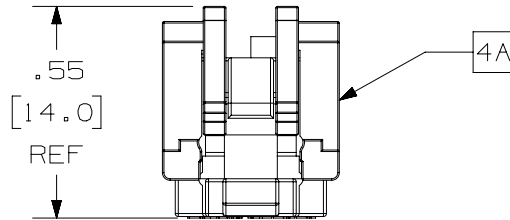




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:


1. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE USE WITH THIS PRODUCT.
2. PRODUCT IS REMOVED THE APPROPRIATE RJ45 FEMALE PORT USING THE SMARTKEEPER MASTER KEY (PANDUIT P.N.: SKMKEY).
3. SEE INSTALLATION INSTRUCTION FOR PROPER USE OF PRODUCT.
4. PARTS INCLUDES (DESCRIPTION: MATERIAL/COLOR):
 - 4A. RJ45 EXTERNAL BODY W/ LOCKING CLIP: POLYCARBONATE (PC), FLAME RATING: UL94 V-0/RED.
 - 4B. INTERNAL BODY W/ UNIQUE FEMALE KEYED PATTERN: POLYCARBONATE (PC), FLAME RATING: UL94 V-0/RED.
5. PRODUCT IS DESIGNED FOR INDOOR USE ONLY.
6. OPERATING TEMPERATURE AND HUMIDITY RANGE:
 - 6A. TEMPERATURE RANGE: -4°F (-20°C) TO +140°F (+60°C)
 - 6B. HUMIDITY RANGE: 10-70% NON-CONDENSING RELATIVE HUMIDITY.
7. STORAGE CONDITIONS:
 - 7A. TEMPERATURE RANGE: -4°F (-20°C) TO +176°F (+80°)
 - 7B. HUMIDITY RANGE: 10-80% NON-CONDENSING RELATIVE HUMIDITY.
8. WEIGHT: 0.01 LBS/ (1) PCS [6.87 grams/ (10) PCS].
9. DIMENSIONS IN [] ARE METRIC.
10. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIALS RESTRICTIONS OF RoHs, (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHs TECHNICAL ADAPTATION COMMITTEE.



(PRODUCT SHOWN IN THE OPEN POSITION)



SCALE 2:1

PART NUMBER		SKRJ45RD-X		
TITLE		SMARTKEEPER RJ45 BLOCKOUT DEVICE		
CUSTOMER DRAWING				
ITEM REVISION NAME	00402NAD/00			
DATASET FILE NAME	00402NAD_DC/00A			
		THIRD ANGLE PROJECTION		
MATERIAL	SEE NOTES			DRAWING NUMBER
				00402NAD-DC
DRAWN BY	DATE	CHK	SCALE	SIZE
MDJR	04-25-19	DCS	2:1	A
REV	DATE	BY	CHK	APR
00A	04-25-19	MDJR	DCS	MMR
DESCRIPTION		ECN		
RELEASED TO PRODUCTION		00402NAD-DC		
SHEET 1 OF 1				

A-SIZE CUSTOMER