
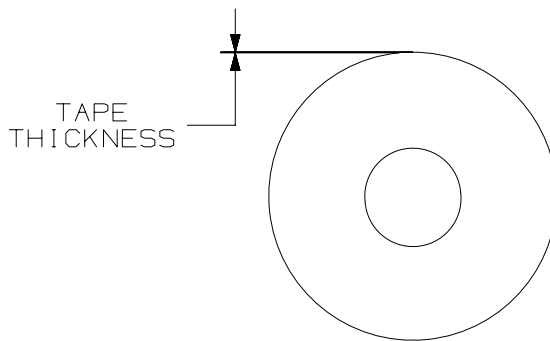


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Part Number	Width in. (mm) ±.08 [2]	Length ft. (m) +1.31 [0.4] -.32 [0.1]	Thickness in. (mm) ±.002 [0.05]	Type Package Style	Description	Insulation Color
ST130-075-30BK	.75 (19)	30 (9.1)	.030 (.76)	Roll Box	Linerless High Voltage Rubber Tape ST130 Black, .75" x 30' x .030"	BLACK
ST130-100-30BK	1.00 (25)	30 (9.1)	.030 (.76)		Linerless High Voltage Rubber Tape ST130 Black, 1.00" x 30' x .030"	BLACK
ST130-150-30BK	1.50 (38)	30 (9.1)	.030 (.76)		Linerless High Voltage Rubber Tape ST130 Black, 1.50" x 30' x .030"	BLACK

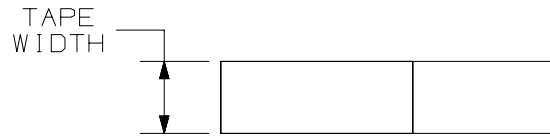

- NOTES:
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
 - ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.
 - MATERIAL: EPR RUBBER BACKING WITH ACRYLIC ADHESIVE
 - TEMPERATURE RATING: 90°C CONTINUOUS
130°C EMERGENCY OVERLOAD.
 - FOR USE FROM 600V TO 69KV
 - FLAME RETARDANT.
 - MOISTURE, CORROSION, UV, AND CHEMICAL RESISTANT.
 - COMPLIANT TO CALIFORNIA PROP. 65

TITLE		Stronghold Linerless High Voltage Rubber Tape	
CUSTOMER DRAWING			
ITEM REVISION NAME	00803EBT/00	PANDUIT	
DATASET FILE NAME	00803EBT_DC/00		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		MATERIAL:	
.x ± .1 [2.54]	.xxx ± .005 [.127]	SEE NOTE3	
.xx ± .01 [.25]	ANGLES ± 1°	DRAWING NUMBER:	
THIRD ANGLE PROJECTION		00803EBT_DC	
DRAWN BY	DATE	CHK	SCALE
JHNU	11/13/2020	MCHD	NONE
REV	DATE	BY	CHK
00	11/13/2020	JHNU	MCHD
		JADE	APR
DESCRIPTION		INITIAL RELEASE	ECN
			090033
SHT 1 OF 1		A	

ANGLOBAL_ASIZE