
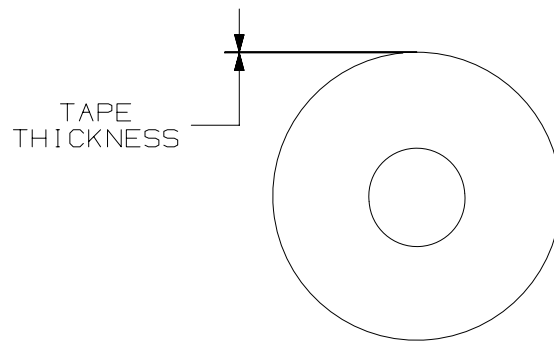


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Part Number	Width in. (mm) ±.08 [2]	Length ft. (m) +1.31 [0.4] -.32 [0.1]	Thickness in. (mm) ±.002 [0.05]	Type Package Style	Description	Insulation Color
ST1755-075-60BK	.75 (19)	60 (18)	.015 (.38)	Roll Cellophane/Label	Friction Tape ST1755 Black, .75" x 60' x .015"	BLACK

- NOTES:
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
 - ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.
 - MATERIAL: COTTON BACKING WITH RUBBER ADHESIVE
 - TEMPERATURE RATING: 80°C CONTINUOUS
 - USED FOR GENERAL MECHANICAL STRENGTH APPLICATIONS.
 - COMPLIANT TO CALIFORNIA PROP. 65

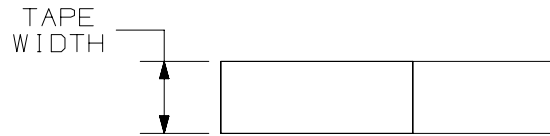

TITLE						Stronghold Friction Tape					
CUSTOMER DRAWING						PANDUIT					
ITEM REVISION NAME						00803EBV/00					
DATASET FILE NAME						00803EBV_DC/00					
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)						MATERIAL:					
.x ± .1 [2.54] .xxx ± .005 [.127]						SEE NOTES					
.xx ± .01 [.25] ANGLES ± 1°						DRAWING NUMBER:					
THIRD ANGLE PROJECTION						00803EBV_DC					
DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1		SIZE					
JHNU	11/13/2020	MCHD	NONE			A					

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	11/13/2020	JHNU	MCHD	JADE	INITIAL RELEASE	090033

ANGLOBAL_ASIZE