THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Part Number	Width in. (mm)	Length ft. (m)	Thickness in. (mm)	Package per Roll	Description	Insulation Color	Weight oz. (gram)
ST35-075-66GR	.75 (19)	66 (20)	.007 (.18)	Plastic Can	Professional Grade ST35 Green, .75" x 66'X .007"	GREEN	3 (86)
ST35-075-66YL	.75 (19)	66 (20)	.007 (.18)	Plastic Can	Professional Grade ST35 Yellow, .75" x 66'X .007"	YELLOW	3 (86)
ST35-075-66RD	.75 (19)	66 (20)	.007 (.18)	Plastic Can	Professional Grade ST35 Red, .75" x 66'X .007"	RED	3 (86)
ST35-075-66BU	.75 (19)	66 (20)	.007 (.18)	Plastic Can	Professional Grade ST35 Blue, .75" x 66'X .007"	BLUE	3 (86)
ST35-075-66WH	.75 (19)	66 (20)	.007 (.18)	Plastic Can	Professional Grade ST35 White, .75" x 66'X .007"	WHITE	3 (86)
ST35-075-66BR	.75 (19)	66 (20)	.007 (.18)	Plastic Can	Professional Grade ST35 Brown, .75" x 66'X .007"	BRROWN	3 (86)
ST35-075-66OR	.75 (19)	66 (20)	.007 (.18)	Plastic Can	Professional Grade ST35 ORANGE, .75" x 66'X .007"	ORANGE	3 (86)
ST35-075-66GY	.75 (19)	66 (20)	.007 (.18)	Plastic Can	Professional Grade ST35 GRAY .75" x 66'X .007"	GRAY	3 (86)
ST35-075-66VI	.75 (19)	66 (20)	.007 (.18)	Plastic Can	Professional Grade ST35 Violet, .75" x 66'X .007"	VIOLET	3 (86)

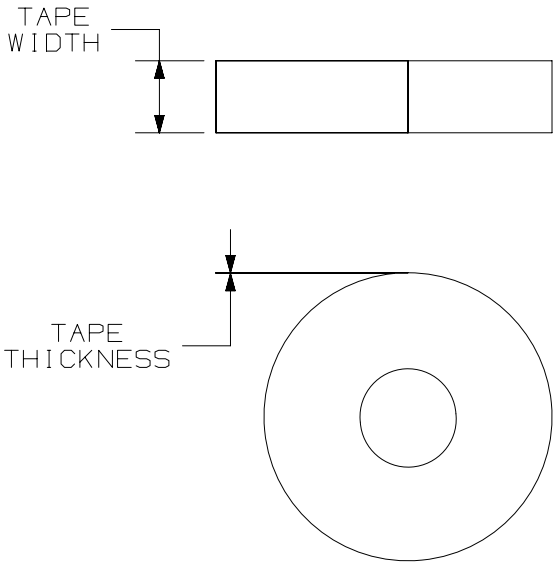

LISTED
Electrical Insulating Tape

CERTIFIED

NOTES:
1. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
2. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITEE.
3. MATERIAL: RUBBER ADHESSIVE PRESSURE SENSITIVE VINYL TAPE.
4. TEMPERATURE RATING: -18 °C TO 105 °C.
5. DIELECTRICAL STRENGTH: 7000V.
6. FLAME RETARDANT.
7. MEETS ASTM D 3005 (TYPE I), EN 60454-3-1 (TYPE II), UL-510 AND CSA C 22.2 NO. 197.
8. COMPLIANT TO CALIFORNIA PROP. 65
9. THE LENGTH TOLERANCE IS MIN. 0.1 METER, MAX. 0.40 METER.
   THE THICKNESS TOLERANCE IS ±0.05 MM.
   THE WIDTH TOLERANCE IS ± 2 MM.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	04/25/2019	JSUN	DMWO	JHAC	INITIAL RELEASE	046172/00

PART NUMBER	SEE TABLE
PACKAGING SPEC	PKG-515
PRODUCT SPEC	PS-SH-002

TITLE

Stronghold Insulating Tape-Professional Grade ST35 Tape

CUSTOMER DRAWING

ITEM REVISION NAME	00351EBP/00
DATASET FILE NAME	00351EBP_DC/00

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.x ± .1 [2.54] .xxx ± .005 [.127]
.xx ± .01 [.25] ANGLES ± 1°
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTE3

DRAWING NUMBER: 00351EBP_DC

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
JSUN	04/25/2019	DMWO	NONE		A

NXGLOBAL_ASIZE