
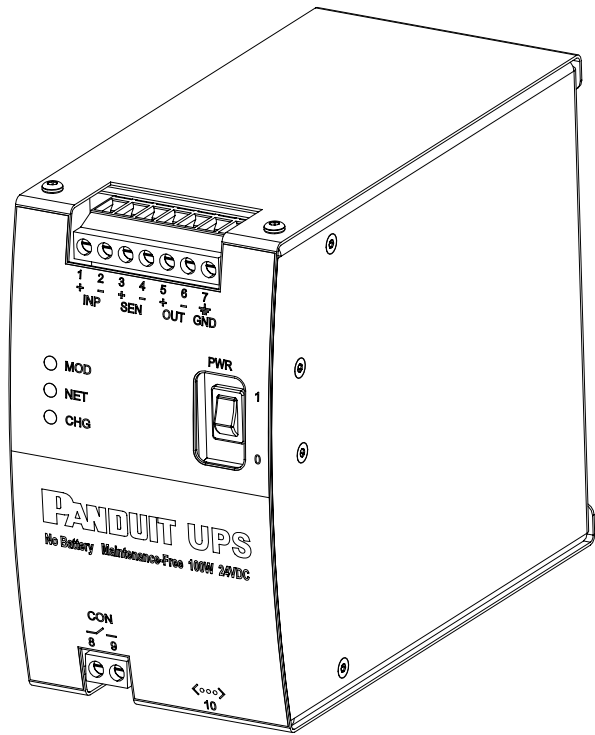


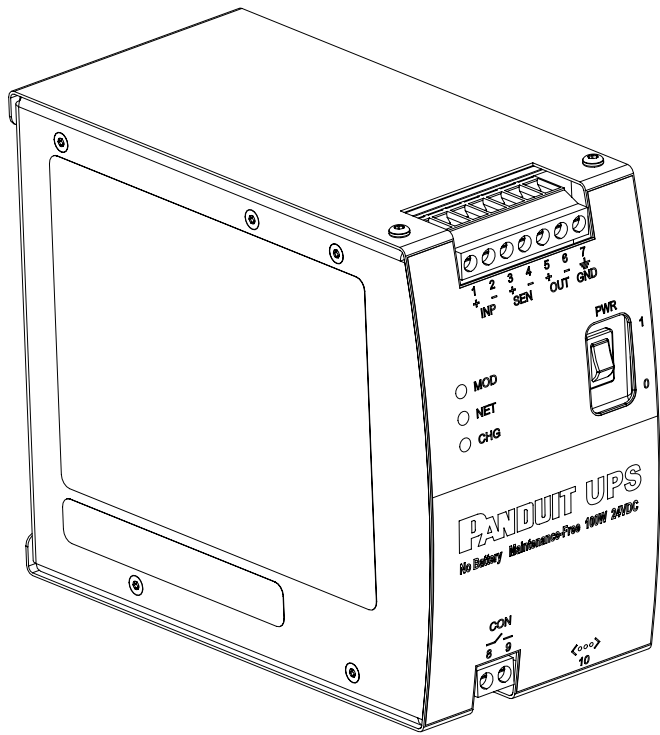

NOTES: UNLESS OTHERWISE SPECIFIED:

PANDUIT PART NO.: UPS00100DC
100W Uninterruptible Power Supply




ACCESSORIES
Load Sense Module Panduit part number UPS003LSM

UPS GENERAL SPECIFICATIONS


Input Power
Voltage: 24.0 to 28.0 VDC
Power: Fast Charge: 50 W Max.
Medium Charge: 35 W Max.
Slow Charge: 24 W Max.
Current: 6.5 A Max.
Protection: Over-voltage shut down at 32 VDC.
Maximum over-voltage is: +50 VDC at 25°C ambient
Reverse voltage maximum is: -50 VDC at 25°C ambient
Output Power
Voltage: Input present: 500 mV drop at 100 W load
Input not present: 21.0 to 23.0 VDC
Current: 4.55 A @ 22 VDC
Short circuit rating: 6.1 A to 7.7 A
Environmental
Operating Temperature: -40°C to +60°C.
Storage (non-operational) Temperature: -40°C to +70°C.
Humidity: 0 to 95% RH, noncondensing
Operational Vibration: 2G at 10 to 500 Hz
Operational Shock: 20G (11ms 3 bumps / direction,
18 bumps in total)

Weight: 2177 gr. / 4.8 lbs.

Numbers shown in parentheses [] are inches.

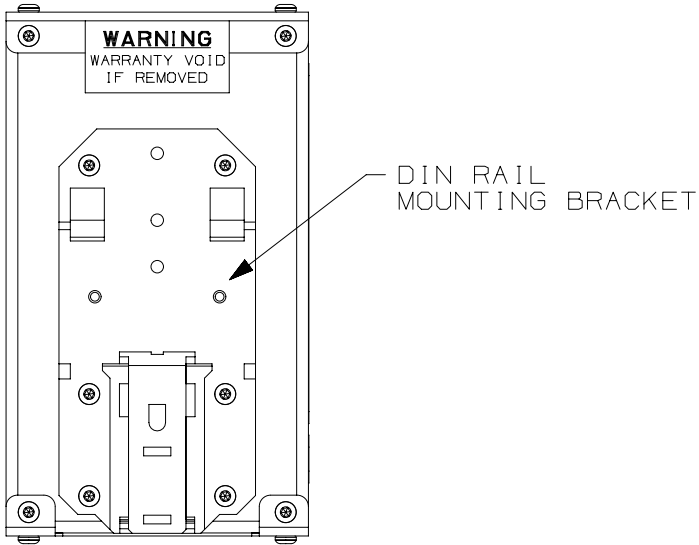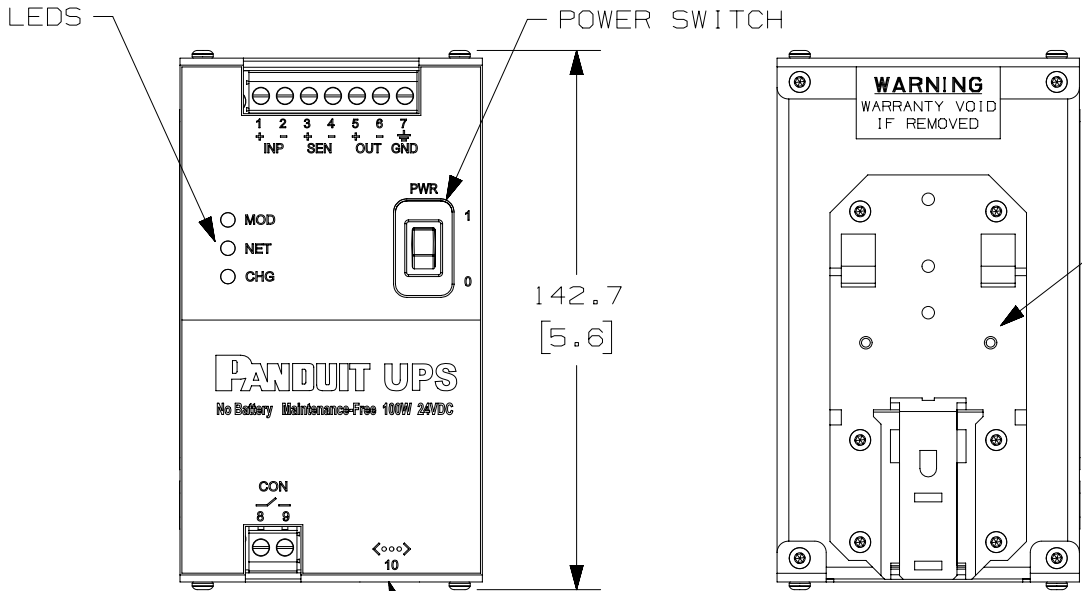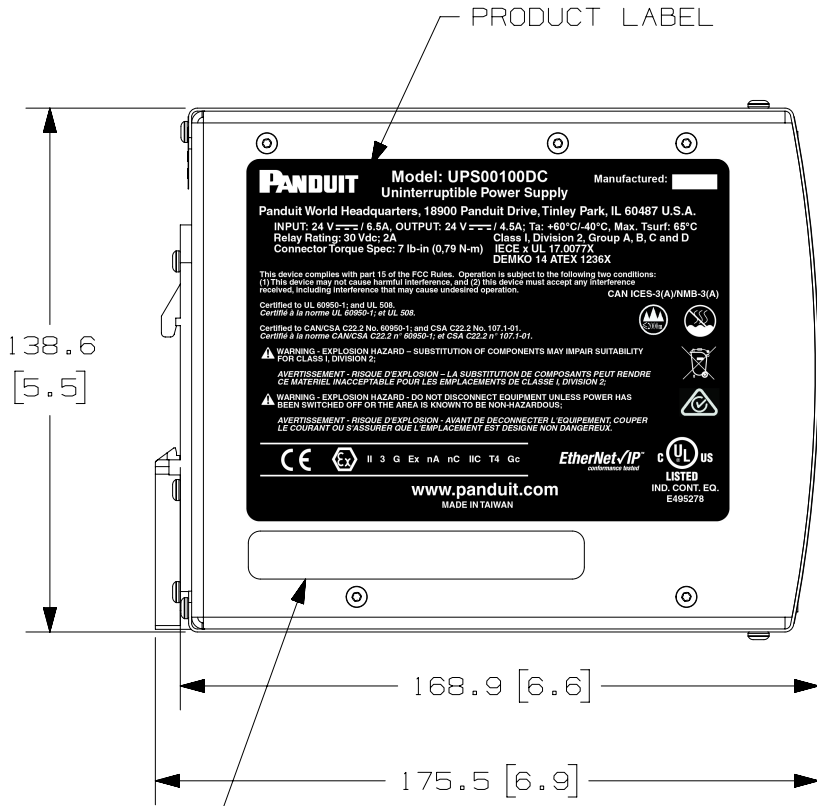

02B	1/9/18	JBO	DAJP	TIMH	RELEASED TO CUSTOMER	00074LAA_DC	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	

TITLE				UPS00100DC 100W UNINTERRUPTIBLE POWER SUPPLY CUSTOMER DRAWING			
ITEM REVISION NAME		00074LAA/02					
DATASET FILE NAME		00074LAA_DC_02B		PANDUIT			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]							
.X ± - .XX ± - .XXX ± - ANGLES ± -  THIRD ANGLE PROJECTION				MATERIAL :			
				N/A			
				DRAWING NUMBER:			
				00074LAA_DC			
DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1		SIZE	
JBO	6/21/17	DAJP	NONE			B	