


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PRE-INSTALLED SWITCH WIRING

PULS 91.2W
24 VOLT DC
POWER SUPPLIES

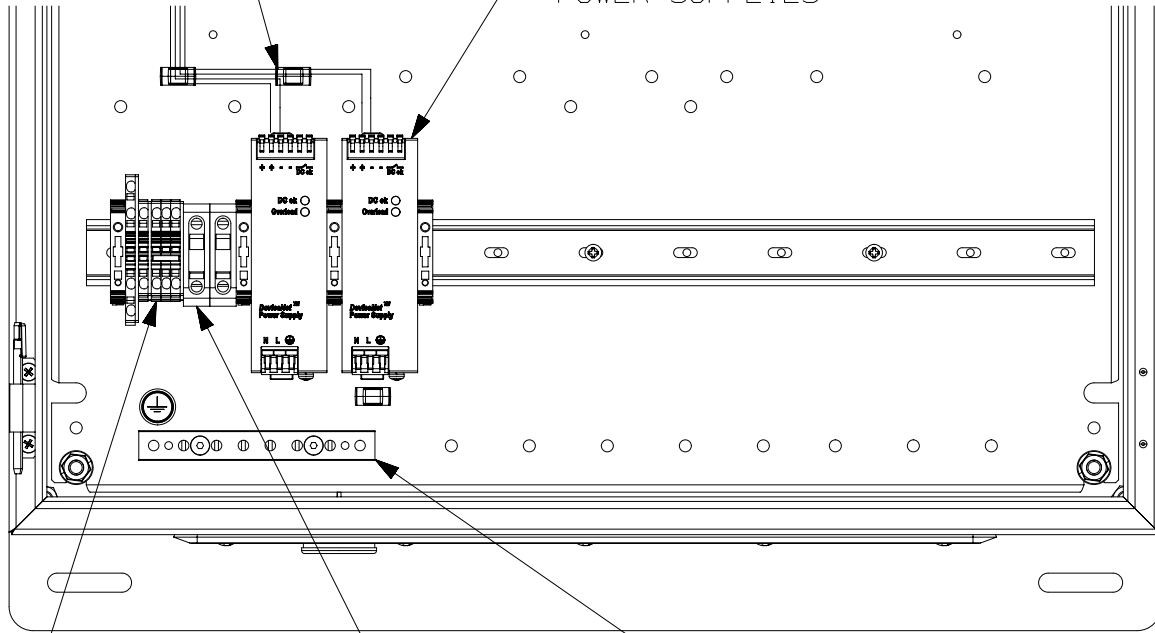

TERMINAL BLOCKS
FOR INCOMING
POWER (100-250
VAC 50-60HZ)

STAHL 10A
CONTACT BLOCKS

6-PORT
GROUND BAR

NOTES:

1. SYSTEM INCLUDES:
 - (2) PULS 91.2W 24 VOLT DC POWER SUPPLIES
 - (2) STAHL 10 AMP LOCKOUT CONTACT BLOCKS
 - (2) WEIDMULLER RED AND WHITE TERMINAL BLOCKS FOR INCOMING POWER
 - (1) PANDUIT 6-PORT GROUND BAR
2. POWER CIRCUIT DESIGNED FOR ONE OR TWO 24 VOLT DC SWITCHES NOT TO EXCEED 42 WATTS PER SWITCH
3. ALL ACTIVE COMPONENTS RATED FOR USE CLASS 1, DIVISION 2 ENVIRONMENTS
4. ALL ZONE SYSTEMS COMPLY WITH UL 508A STANDARDS
5. ALL ZONE SYSTEMS REQUIRE A 100-240 VOLT AC SINGLE-PHASE FEED
6. INTERNAL WIRING NOT SHOWN, SEE DRAWING (15V510WB) FOR COMPLETE SCHEMATIC

01A	2/21/18	JBO	NWW	TIMH	RELEASED TO CUSTOMER				15V510CK	
REV	DATE	BY	CHK	APR	DESCRIPTION				ECN	

TITLE				UNIVERSAL NETWORK ZONE SYSTEM, 100-240VAC INPUT, REDUNDANT 91.2W 24VDC POWER SUPPLIES CUSTOMER DRAWING			
ITEM REVISION NAME				15V510CK/01			
DATASET FILE NAME				15V510CK_DC/01A			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:				MATERIAL:			
INCHES		METRIC - MILLIMETER		ANGLE		N/A	
X.X	+/- 0.03	X.	+/- 0.8				
X.XX	+/- 0.018	X.X	+/- 0.46				
X.XXX	+/- 0.007	X.XX	+/- 0.18				
DRAWING NUMBER:				15V510CK			
DRAWN BY				THIRD ANGLE PROJECTION			
DATE		CHK		SCALE		SIZE	
2/25/16		TIMH		1:4		A	
SHT 1 OF 1							

001V0003DA/00