

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. SYSTEM INCLUDES:

- (2) PULS 91.2W 24 VOLT DC POWER SUPPLIES
- (1) PULS 24 VOLT DC UPS
- (1) PULS 24 VOLT DC BACK UP BATTERY
- (2) STAHL 10 AMP LOCKOUT CONTACT BLOCKS
- (2) WEIDMULLER RED AND WHITE TERMINAL BLOCKS FOR INCOMING POWER
- (1) PANDUIT 6-PORT GROUND BAR


2. POWER CIRCUIT DESIGNED FOR ONE OR TWO 24 VOLT DC SWITCHES NOT TO EXCEED 42 WATTS PER SWITCH


3. ALL ACTIVE COMPONENTS RATED FOR USE CLASS 1, DIVISION 2 ENVIRONMENTS

4. ALL ZONE SYSTEMS COMPLY WITH UL 508A STANDARDS

5. ALL ZONE SYSTEMS REQUIRE A 100-240 VOLT AC SINGLE-PHASE FEED

6. INTERNAL WIRING NOT SHOWN, SEE DRAWING (15V510WA) FOR COMPLETE SCHEMATIC

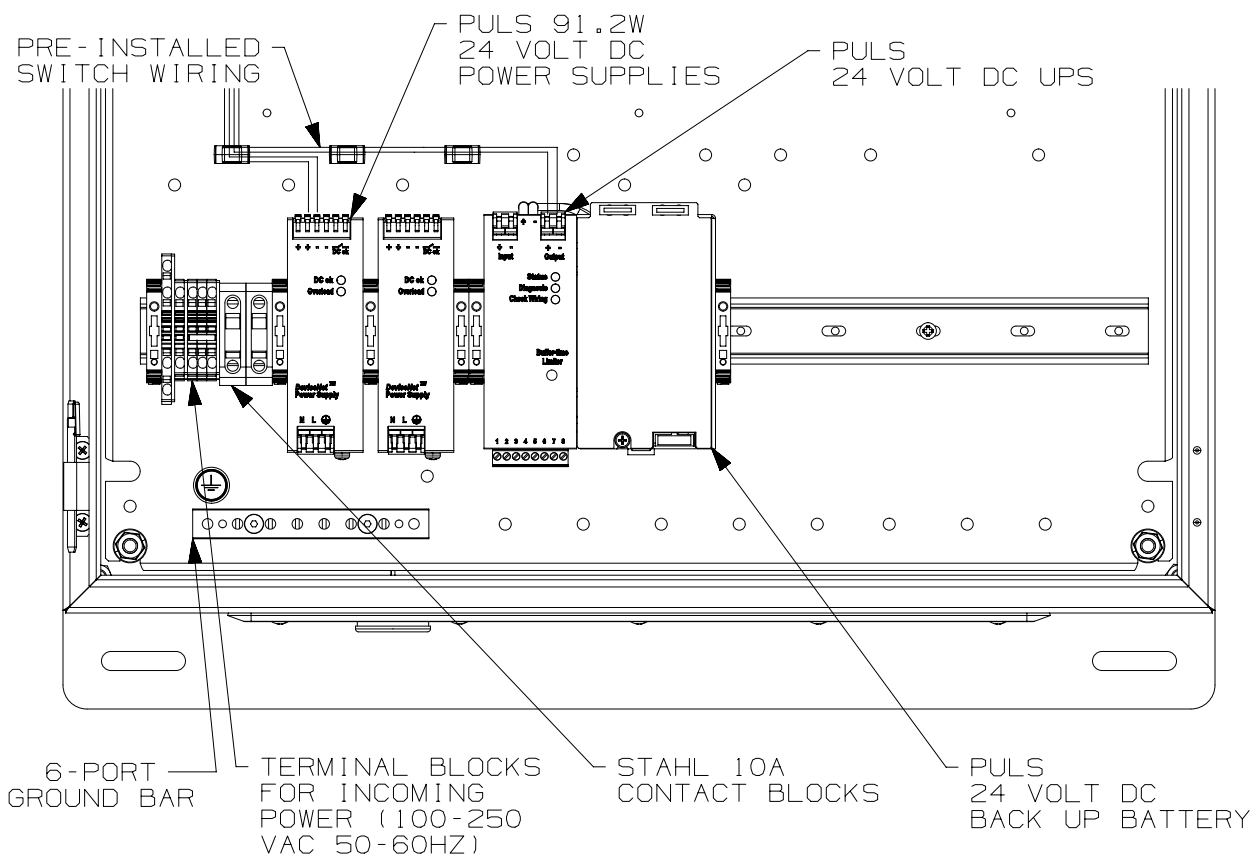

							TITLE UNIVERSAL NETWORK ZONE SYSTEM, 100-240VAC INPUT, REDUNDANT 91.2W 24VDC POWER SUPPLIES, BATTERY UPS CUSTOMER DRAWING					
							ITEM REVISION NAME 15V510CJ/01					
							DATASET FILE NAME 15V510CJ_DC/01A					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: INCHES X.X +/- 0.03 X.XX +/- 0.018 X.XXX +/- 0.007			MATERIAL: N/A		
							METRIC - MILLIMETER X. +/- 0.8 X.X +/- 0.46 X.XX +/- 0.18			ANGLE +/- 1°		
01A	2/21/18	JBO	NWW	TIMH	RELEASED TO CUSTOMER	15V510CJ			THIRD ANGLE PROJECTION		DRAWING NUMBER: 15V510CJ	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY NWW	DATE 2/24/16	CHK TIMH	SCALE 1:4	SHT 1 OF 1	SIZE A